AAAC 120

All Aluminium Alloy Conductor · Metric series · IEC 61089 · BS EN 50182 · EN 50183 · ES

Product code	**ATC-AAA-008**
Designation	**120**
Aluminium area	**117.0 mm²**
Stranding, aluminium	**19 x 2.80 mm**
Overall diameter	**14.0 mm**
Approx. mass	**321.2 kg/km**
DC resistance at 20 °C	**0.2827 Ohm/km**
Rated tensile strength	**34.51 kN**
Current rating	**360 A**

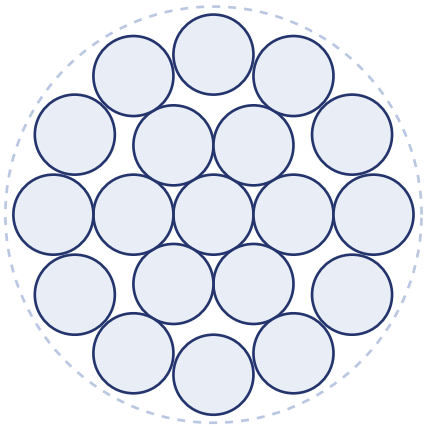

19 × 2.80 mm Al · Ø 14.0 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.