# AAAC Acacia · 24-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAA-B02** |
| Code name | **Acacia** |
| Designation | **24-AL3** |
| Aluminium area | **23.80 mm²** |
| Stranding, aluminium | **7 x 2.08 mm** |
| Overall diameter | **6.24 mm** |
| Approx. mass | **64.90 kg/km** |
| DC resistance at 20 °C | **1.3828 Ohm/km** |
| Rated tensile strength | **7.02 kN** |
| Current rating | **130 A** |

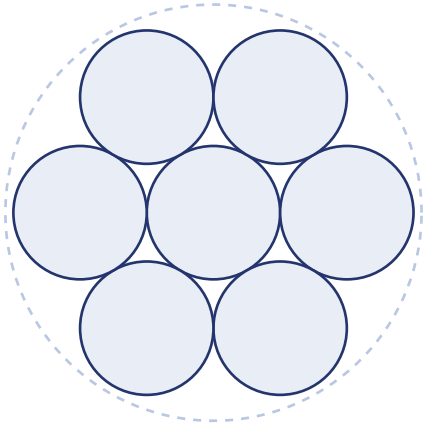

7 × 2.08 mm Al · Ø 6.24 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.