# AAC Spider · 238-AL1

All Aluminium Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAC-B17** |
| Code name | **Spider** |
| Designation | **238-AL1** |
| Aluminium area | **237.60 mm²** |
| Stranding, aluminium | **19 x 3.99 mm** |
| Overall diameter | **20.00 mm** |
| Approx. mass | **652.9 kg/km** |
| DC resistance at 20 °C | **0.121 Ohm/km** |
| Rated tensile strength | **38.01 kN** |
| Current rating | **600 A** |

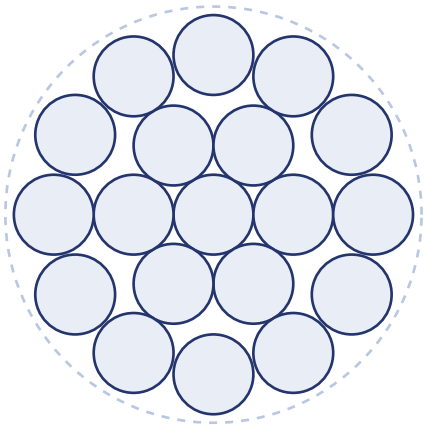

19 × 3.99 mm Al · Ø 20.00 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.