# AAC Maybug · 486-AL1

All Aluminium Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAC-B23** |
| Code name | **Maybug** |
| Designation | **486-AL1** |
| Aluminium area | **486.10 mm²** |
| Stranding, aluminium | **37 x 4.09 mm** |
| Overall diameter | **28.60 mm** |
| Approx. mass | **1340.6 kg/km** |
| DC resistance at 20 °C | **0.0593 Ohm/km** |
| Rated tensile strength | **77.78 kN** |
| Current rating | **940 A** |

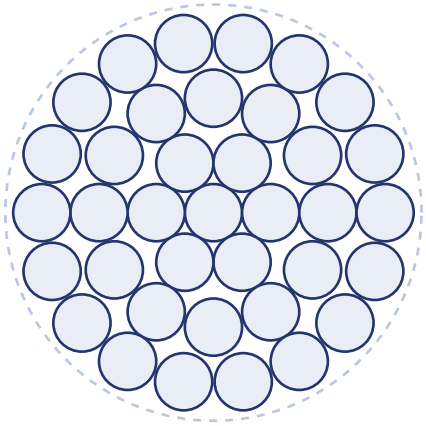

37 × 4.09 mm Al · Ø 28.60 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.