ACSR Goat · 324.30 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

Product code	**ATC-ACS-B28**
Code name	**Goat**
Designation	**324.30 mm²**
Aluminium area	**324.30 mm²**
Steel area	**75.70 mm²**
Total area	**400.0 mm²**
Stranding, aluminium	**30 x 3.71 mm**
Stranding, steel	**7 x 3.71 mm**
Overall diameter	**26.00 mm**
Approx. mass	**1488.2 kg/km**
DC resistance at 20 °C	**0.0891 Ohm/km**
Rated tensile strength	**135.13 kN**
Current rating	**750 A**

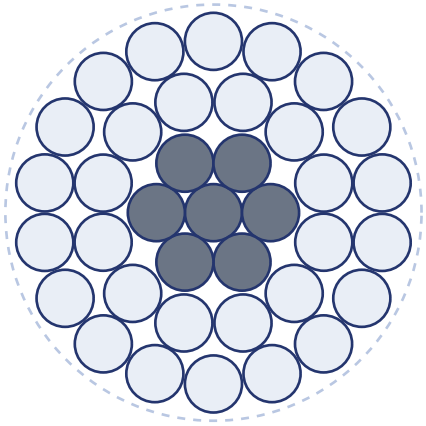

30 × 3.71 mm Al / 7 × 3.71 mm St · Ø 26.00 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.