# ACSR Camel · 476.00 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-ACS-B35** |
| Code name | **Camel** |
| Designation | **476.00 mm²** |
| Aluminium area | **476.00 mm²** |
| Steel area | **61.70 mm²** |
| Total area | **537.7 mm²** |
| Stranding, aluminium | **54 x 3.35 mm** |
| Stranding, steel | **7 x 3.35 mm** |
| Overall diameter | **30.20 mm** |
| Approx. mass | **1798.8 kg/km** |
| DC resistance at 20 °C | **0.0608 Ohm/km** |
| Rated tensile strength | **146.40 kN** |
| Current rating | **945 A** |

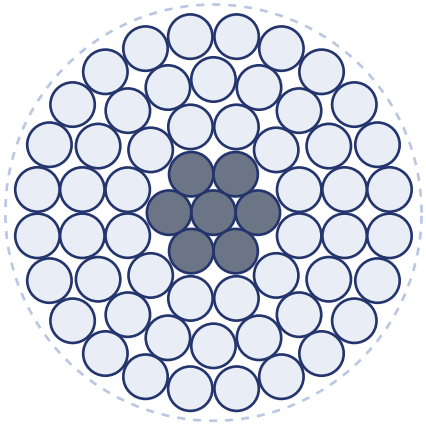

54 × 3.35 mm Al / 7 × 3.35 mm St · Ø 30.20 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.