AAAC Cedar · 35-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

Product code	**ATC-AAA-B04**
Code name	**Cedar**
Designation	**35-AL3**
Aluminium area	**35.50 mm²**
Stranding, aluminium	**7 x 2.54 mm**
Overall diameter	**7.62 mm**
Approx. mass	**96.80 kg/km**
DC resistance at 20 °C	**0.9273 Ohm/km**
Rated tensile strength	**10.46 kN**
Current rating	**170 A**

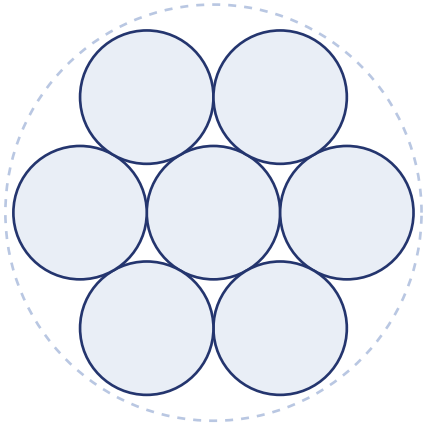

7 × 2.54 mm Al · Ø 7.62 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.