AAAC Sorbus · 659-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

Product code	**ATC-AAA-B21**
Code name	**Sorbus**
Designation	**659-AL3**
Aluminium area	**659.40 mm²**
Stranding, aluminium	**61 x 3.71 mm**
Overall diameter	**33.40 mm**
Approx. mass	**1822.50 kg/km**
DC resistance at 20 °C	**0.0508 Ohm/km**
Rated tensile strength	**194.53 kN**
Current rating	**1075 A**

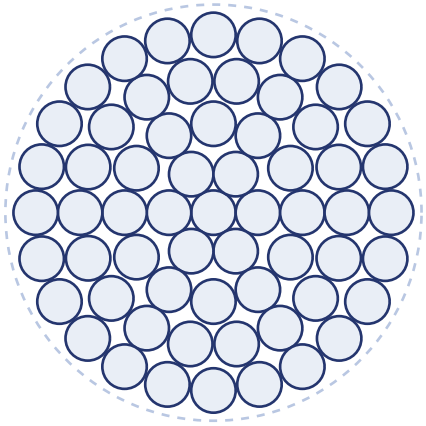

61 × 3.71 mm Al · Ø 33.40 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.