# AAC Beetle · 106-AL1

All Aluminium Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAC-B12** |
| Code name | **Beetle** |
| Designation | **106-AL1** |
| Aluminium area | **106.40 mm²** |
| Stranding, aluminium | **19 x 2.67 mm** |
| Overall diameter | **13.40 mm** |
| Approx. mass | **292.4 kg/km** |
| DC resistance at 20 °C | **0.2701 Ohm/km** |
| Rated tensile strength | **18.08 kN** |
| Current rating | **360 A** |

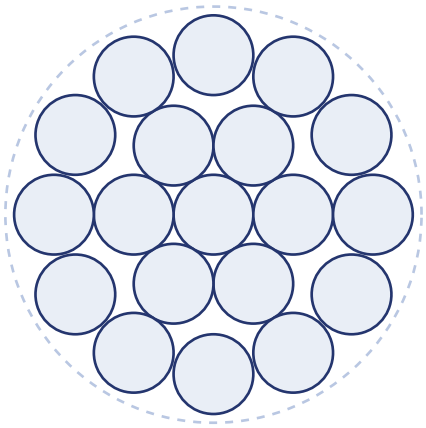

19 × 2.67 mm Al · Ø 13.40 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.