AAC Centipede · 415-AL1

All Aluminium Conductor · BS EN 50182 · BS EN 50182

Product code	**ATC-AAC-B22**
Code name	**Centipede**
Designation	**415-AL1**
Aluminium area	**415.20 mm²**
Stranding, aluminium	**37 x 3.78 mm**
Overall diameter	**26.50 mm**
Approx. mass	**1145.1 kg/km**
DC resistance at 20 °C	**0.0695 Ohm/km**
Rated tensile strength	**66.43 kN**
Current rating	**855 A**

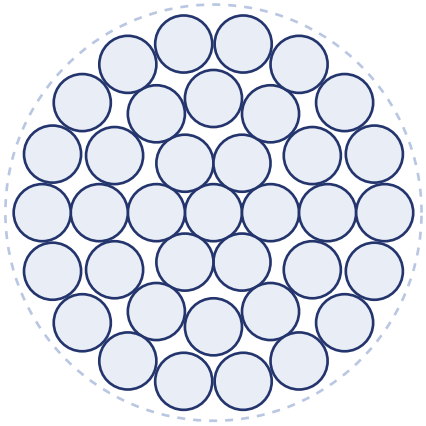

37 × 3.78 mm Al · Ø 26.50 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.