ACSR 50/8

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-004**
Designation	**50/8**
Aluminium area	**48.3 mm²**
Steel area	**8.0 mm²**
Total area	**56.3 mm²**
Stranding, aluminium	**6 x 3.20 mm**
Stranding, steel	**1 x 3.20 mm**
Overall diameter	**9.6 mm**
Approx. mass	**195 kg/km**
DC resistance at 20 °C	**0.5939 Ohm/km**
Rated tensile strength	**16.81 kN**
Current rating	**225 A**

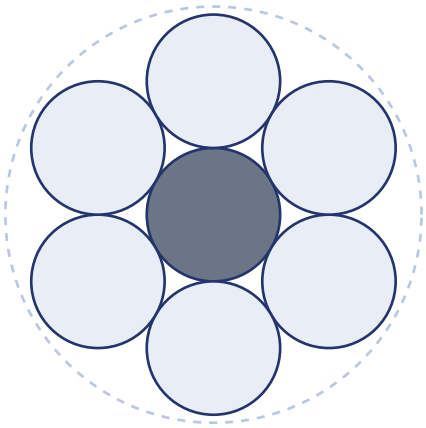

6 × 3.20 mm Al / 1 × 3.20 mm St · Ø 9.6 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.