ACSR 240/40

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-011**
Designation	**240/40**
Aluminium area	**243.1 mm²**
Steel area	**39.5 mm²**
Total area	**282.5 mm²**
Stranding, aluminium	**26 x 3.45 mm**
Stranding, steel	**7 x 2.68 mm**
Overall diameter	**21.8 mm**
Approx. mass	**979 kg/km**
DC resistance at 20 °C	**0.1188 Ohm/km**
Rated tensile strength	**85.12 kN**
Current rating	**620 A**

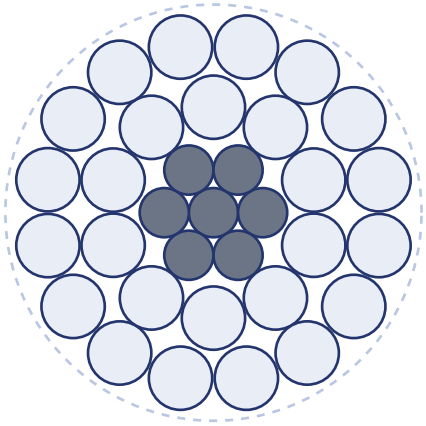

26 × 3.45 mm Al / 7 × 2.68 mm St · Ø 21.8 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.