# AAAC Araucaria · 821-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAA-B22** |
| Code name | **Araucaria** |
| Designation | **821-AL3** |
| Aluminium area | **821.10 mm²** |
| Stranding, aluminium | **61 x 4.14 mm** |
| Overall diameter | **37.30 mm** |
| Approx. mass | **2269.40 kg/km** |
| DC resistance at 20 °C | **0.0406 Ohm/km** |
| Rated tensile strength | **242.24 kN** |
| Current rating | **1235 A** |

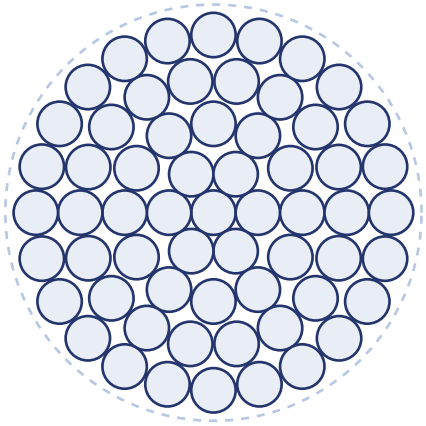

61 × 4.14 mm Al · Ø 37.30 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.