# AAAC Redwood · 996-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-AAA-B23** |
| Code name | **Redwood** |
| Designation | **996-AL3** |
| Aluminium area | **996.20 mm²** |
| Stranding, aluminium | **61 x 4.56 mm** |
| Overall diameter | **41.00 mm** |
| Approx. mass | **2753.20 kg/km** |
| DC resistance at 20 °C | **0.0334 Ohm/km** |
| Rated tensile strength | **293.88 kN** |
| Current rating | **1400 A** |

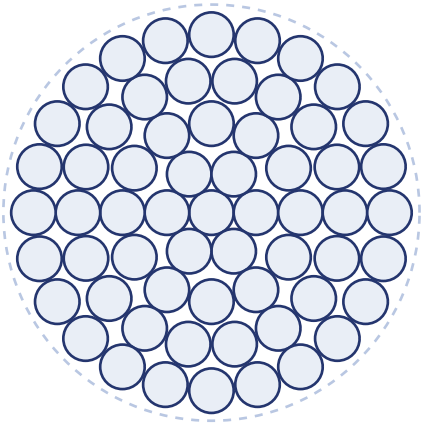

61 × 4.56 mm Al · Ø 41.00 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.