ACSR 120/20

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-007**
Designation	**120/20**
Aluminium area	**121.6 mm²**
Steel area	**19.8 mm²**
Total area	**141.4 mm²**
Stranding, aluminium	**26 x 2.44 mm**
Stranding, steel	**7 x 1.90 mm**
Overall diameter	**15.5 mm**
Approx. mass	**490 kg/km**
DC resistance at 20 °C	**0.2376 Ohm/km**
Rated tensile strength	**44.50 kN**
Current rating	**400 A**

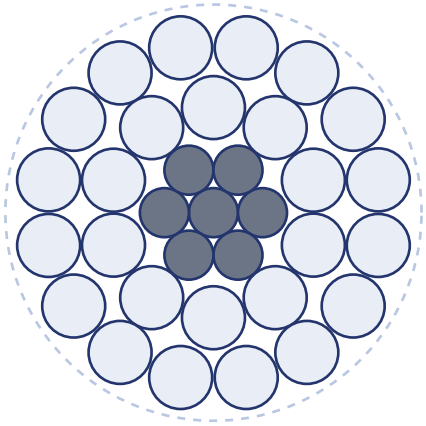

26 × 2.44 mm Al / 7 × 1.90 mm St · Ø 15.5 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.