ACSR 150/25

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-008**
Designation	**150/25**
Aluminium area	**148.9 mm²**
Steel area	**24.2 mm²**
Total area	**173.1 mm²**
Stranding, aluminium	**26 x 2.70 mm**
Stranding, steel	**7 x 2.10 mm**
Overall diameter	**17.1 mm**
Approx. mass	**600 kg/km**
DC resistance at 20 °C	**0.1940 Ohm/km**
Rated tensile strength	**53.67 kN**
Current rating	**455 A**

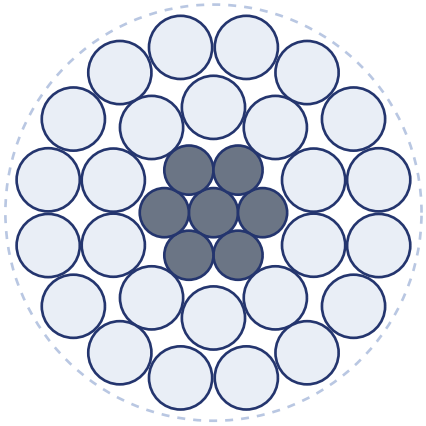

26 × 2.70 mm Al / 7 × 2.10 mm St · Ø 17.1 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.