# ACSR Racoon · 78.80 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-ACS-B12** |
| Code name | **Racoon** |
| Designation | **78.80 mm²** |
| Aluminium area | **78.80 mm²** |
| Steel area | **13.10 mm²** |
| Total area | **91.9 mm²** |
| Stranding, aluminium | **6 x 4.09 mm** |
| Stranding, steel | **1 x 4.09 mm** |
| Overall diameter | **12.30 mm** |
| Approx. mass | **318.3 kg/km** |
| DC resistance at 20 °C | **0.3635 Ohm/km** |
| Rated tensile strength | **27.06 kN** |
| Current rating | **305 A** |

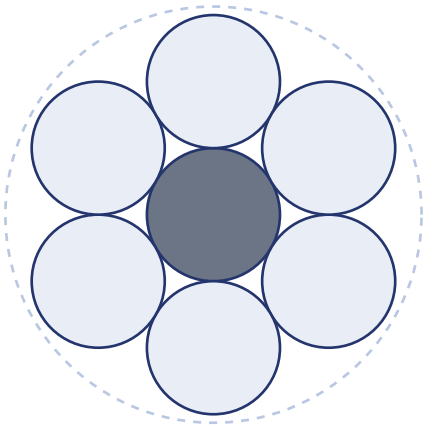

6 × 4.09 mm Al / 1 × 4.09 mm St · Ø 12.30 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.