# ACSR Dingo · 158.70 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-ACS-B21** |
| Code name | **Dingo** |
| Designation | **158.70 mm²** |
| Aluminium area | **158.70 mm²** |
| Steel area | **8.81 mm²** |
| Total area | **167.5 mm²** |
| Stranding, aluminium | **18 x 3.35 mm** |
| Stranding, steel | **1 x 3.35 mm** |
| Overall diameter | **16.75 mm** |
| Approx. mass | **505.2 kg/km** |
| DC resistance at 20 °C | **0.1814 Ohm/km** |
| Rated tensile strength | **35.87 kN** |
| Current rating | **465 A** |

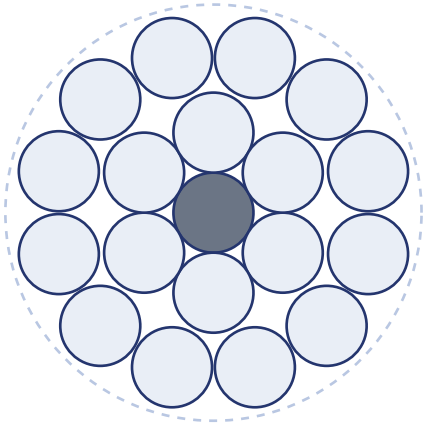

18 × 3.35 mm Al / 1 × 3.35 mm St · Ø 16.75 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.