ACSR Bison · 381.70 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

Product code	**ATC-ACS-B31**
Code name	**Bison**
Designation	**381.70 mm²**
Aluminium area	**381.70 mm²**
Steel area	**49.50 mm²**
Total area	**431.2 mm²**
Stranding, aluminium	**54 x 3.00 mm**
Stranding, steel	**7 x 3.00 mm**
Overall diameter	**27.00 mm**
Approx. mass	**1442.5 kg/km**
DC resistance at 20 °C	**0.0758 Ohm/km**
Rated tensile strength	**121.30 kN**
Current rating	**820 A**

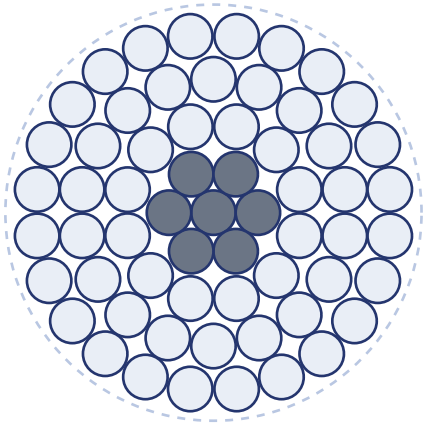

54 × 3.00 mm Al / 7 × 3.00 mm St · Ø 27.00 mm

Type-tested: EHVRC report 568/2026

17 of 17 type tests passed, 29 Sep 2026

IEC 61089 · BS EN 50182 · EDMS 04-100-1

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.