AAAC 50

All Aluminium Alloy Conductor · Metric series · IEC 61089 · BS EN 50182 · EN 50183 · ES

Product code	**ATC-AAA-005**
Designation	**50**
Aluminium area	**48.3 mm²**
Stranding, aluminium	**19 x 1.80 mm**
Overall diameter	**9.0 mm**
Approx. mass	**132.7 kg/km**
DC resistance at 20 °C	**0.6841 Ohm/km**
Rated tensile strength	**14.26 kN**
Current rating	**205 A**

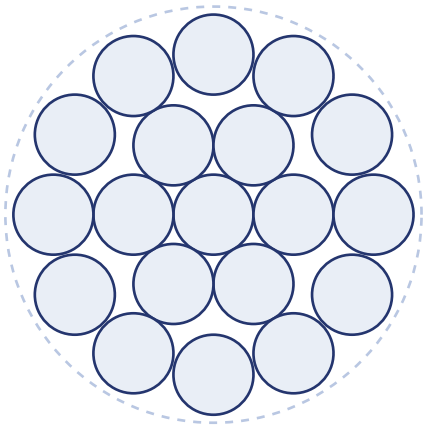

19 × 1.80 mm Al · Ø 9.0 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.