AAAC 625

All Aluminium Alloy Conductor · Metric series · IEC 61089 · BS EN 50182 · EN 50183 · ES

Product code	**ATC-AAA-015**
Designation	**625**
Aluminium area	**626.2 mm²**
Stranding, aluminium	**91 x 2.96 mm**
Overall diameter	**32.6 mm**
Approx. mass	**1737.7 kg/km**
DC resistance at 20 °C	**0.0534 Ohm/km**
Rated tensile strength	**184.73 kN**
Current rating	**1040 A**

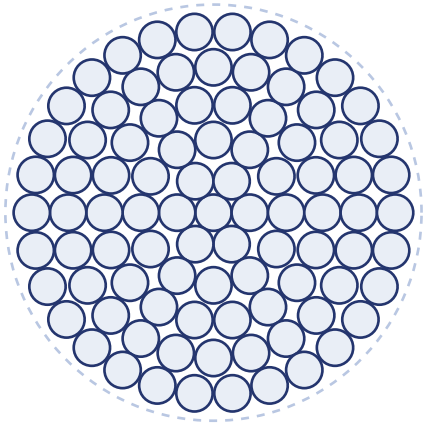

91 × 2.96 mm Al · Ø 32.6 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.