AAAC Upas · 362-AL3

All Aluminium Alloy Conductor · BS EN 50182 · BS EN 50182

Product code	**ATC-AAA-B17**
Code name	**Upas**
Designation	**362-AL3**
Aluminium area	**362.10 mm²**
Stranding, aluminium	**37 x 3.53 mm**
Overall diameter	**24.70 mm**
Approx. mass	**997.50 kg/km**
DC resistance at 20 °C	**0.0917 Ohm/km**
Rated tensile strength	**106.82 kN**
Current rating	**735 A**

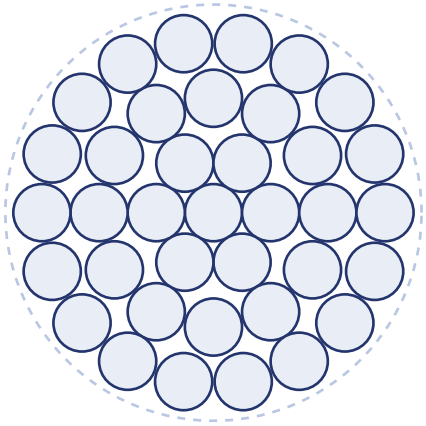

37 × 3.53 mm Al · Ø 24.70 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.