ACSR 70/12

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-005**
Designation	**70/12**
Aluminium area	**69.9 mm²**
Steel area	**11.4 mm²**
Total area	**81.3 mm²**
Stranding, aluminium	**26 x 1.85 mm**
Stranding, steel	**7 x 1.44 mm**
Overall diameter	**11.7 mm**
Approx. mass	**282 kg/km**
DC resistance at 20 °C	**0.4132 Ohm/km**
Rated tensile strength	**26.27 kN**
Current rating	**280 A**

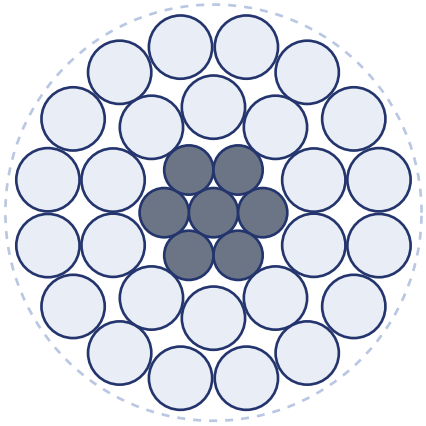

26 × 1.85 mm Al / 7 × 1.44 mm St · Ø 11.7 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.