ACSR 95/15

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-006**
Designation	**95/15**
Aluminium area	**94.4 mm²**
Steel area	**15.3 mm²**
Total area	**109.7 mm²**
Stranding, aluminium	**26 x 2.15 mm**
Stranding, steel	**7 x 1.67 mm**
Overall diameter	**13.6 mm**
Approx. mass	**380 kg/km**
DC resistance at 20 °C	**0.3060 Ohm/km**
Rated tensile strength	**34.93 kN**
Current rating	**340 A**

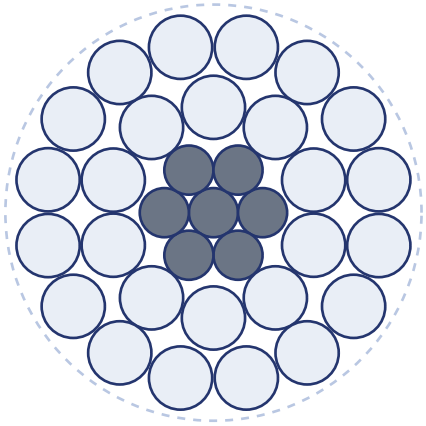

26 × 2.15 mm Al / 7 × 1.67 mm St · Ø 13.6 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.