ACSR 185/30

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-009**
Designation	**185/30**
Aluminium area	**183.8 mm²**
Steel area	**29.8 mm²**
Total area	**213.6 mm²**
Stranding, aluminium	**26 x 3.00 mm**
Stranding, steel	**7 x 2.33 mm**
Overall diameter	**19.0 mm**
Approx. mass	**740 kg/km**
DC resistance at 20 °C	**0.1571 Ohm/km**
Rated tensile strength	**65.27 kN**
Current rating	**520 A**

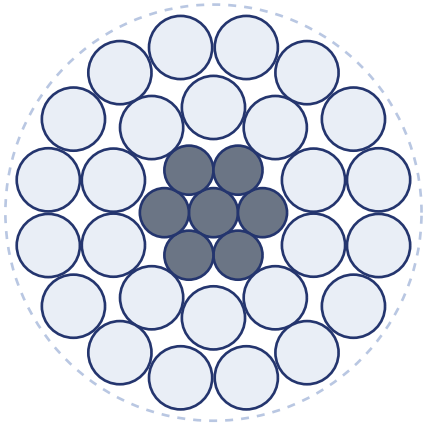

26 × 3.00 mm Al / 7 × 2.33 mm St · Ø 19.0 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.