ACSR Squirrel · 21.00 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

Product code	**ATC-ACS-B02**
Code name	**Squirrel**
Designation	**21.00 mm²**
Aluminium area	**21.00 mm²**
Steel area	**3.50 mm²**
Total area	**24.5 mm²**
Stranding, aluminium	**6 x 2.11 mm**
Stranding, steel	**1 x 2.11 mm**
Overall diameter	**6.33 mm**
Approx. mass	**84.7 kg/km**
DC resistance at 20 °C	**1.3659 Ohm/km**
Rated tensile strength	**7.87 kN**
Current rating	**130 A**

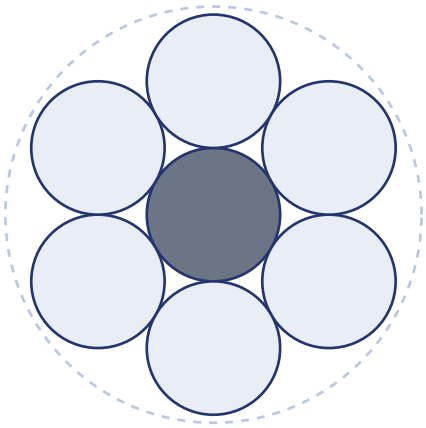

6 × 2.11 mm Al / 1 × 2.11 mm St · Ø 6.33 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.