# ACSR Sheep · 375.10 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

| | |
|---|---|
| Product code | **ATC-ACS-B29** |
| Code name | **Sheep** |
| Designation | **375.10 mm²** |
| Aluminium area | **375.10 mm²** |
| Steel area | **87.50 mm²** |
| Total area | **462.6 mm²** |
| Stranding, aluminium | **30 x 3.99 mm** |
| Stranding, steel | **7 x 3.99 mm** |
| Overall diameter | **27.90 mm** |
| Approx. mass | **1721.3 kg/km** |
| DC resistance at 20 °C | **0.0771 Ohm/km** |
| Rated tensile strength | **156.30 kN** |
| Current rating | **820 A** |

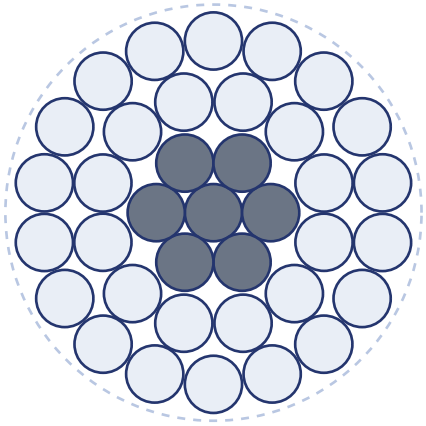

30 × 3.99 mm Al / 7 × 3.99 mm St · Ø 27.90 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.