ACSR Zebra · 428.90 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

Product code	**ATC-ACS-B33**
Code name	**Zebra**
Designation	**428.90 mm²**
Aluminium area	**428.90 mm²**
Steel area	**55.60 mm²**
Total area	**484.5 mm²**
Stranding, aluminium	**54 x 3.18 mm**
Stranding, steel	**7 x 3.18 mm**
Overall diameter	**28.60 mm**
Approx. mass	**1620.8 kg/km**
DC resistance at 20 °C	**0.0674 Ohm/km**
Rated tensile strength	**131.92 kN**
Current rating	**885 A**

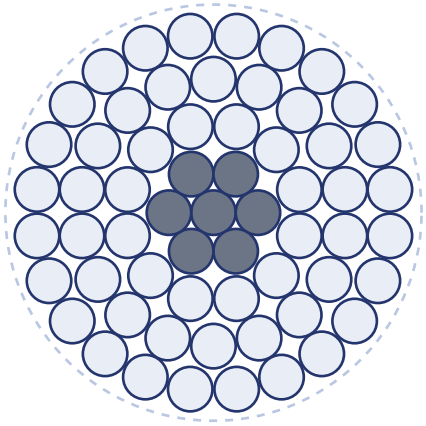

54 × 3.18 mm Al / 7 × 3.18 mm St · Ø 28.60 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.