

## 1. Description


### 1.1. Project

Project Name	spi_demo
Board Name	NUCLEO-F410RB
Generated with:	STM32CubeMX 4.21.0
Date	11/04/2017

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F410
MCU name	STM32F410RBTx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

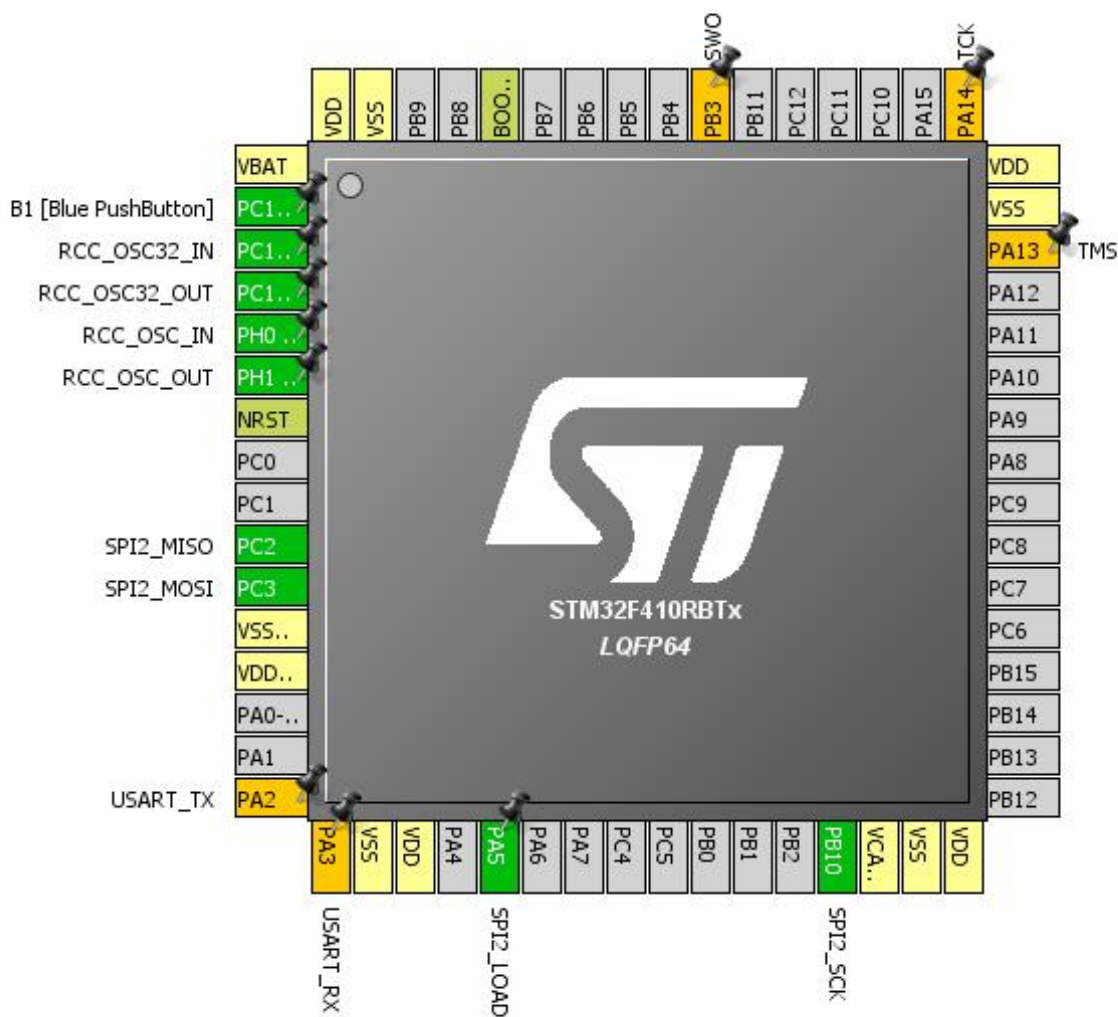


### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
10	PC2	I/O	SPI2_MISO	
11	PC3	I/O	SPI2_MOSI	
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
16	PA2 *	I/O	USART2_TX	USART_TX
17	PA3 *	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	SPI2_LOAD
29	PB10	I/O	SPI2_SCK	
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14 *	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

\*\* The pin is affected with an I/O function

\* The pin is affected with a peripheral function but no peripheral mode is activated

#### 4. Clock Tree Configuration

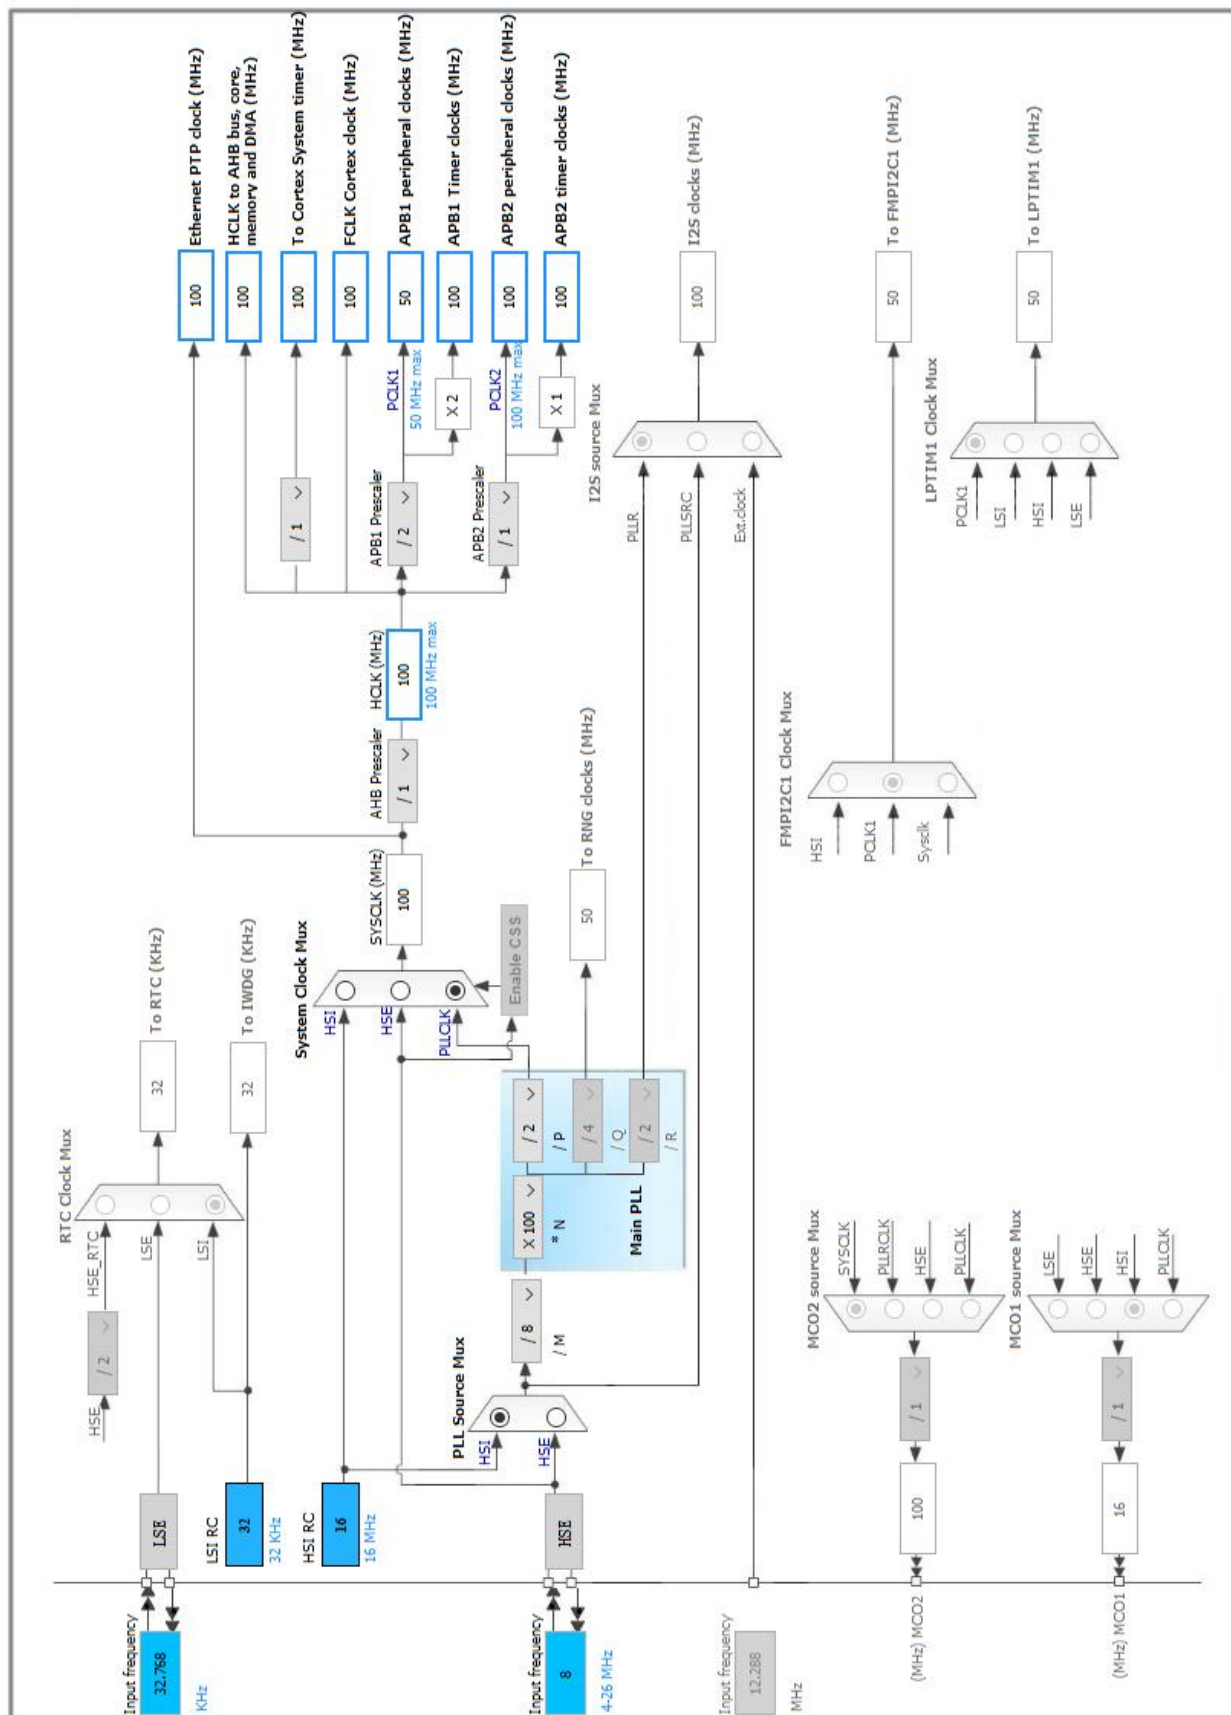

## 5. IPs and Middleware Configuration

### 5.1. RCC

**High Speed Clock (HSE): Crystal/Ceramic Resonator**

**Low Speed Clock (LSE) : Crystal/Ceramic Resonator**

#### 5.1.1. Parameter Settings:

##### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

##### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

##### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

### 5.2. SPI2

**Mode: Full-Duplex Master**

#### 5.2.1. Parameter Settings:

##### Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

##### Clock Parameters:

Prescaler (for Baud Rate)	<b>32 *</b>
Baud Rate	<b>1.5625 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

**Advanced Parameters:**

CRC Calculation	Disabled
NSS Signal Type	Software

### 5.3. SYS

**Timebase Source: SysTick**

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PC2	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC3	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB10	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
Single Mapped Signals	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13-ANTI_TAMP	GPIO_EXTI13	<b>External Interrupt Mode with Falling edge trigger detection</b>	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI2_LOAD

### 6.2. DMA configuration

nothing configured in DMA service



### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SPI2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
FPU global interrupt	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F410
MCU	STM32F410RBTx
Datasheet	028094_Rev2

### 7.2. Parameter Selection

Temperature	25
Vdd	null

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	spi_demo
Project Folder	D:\CubeMX\mdk\spi_demo
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.16.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No