


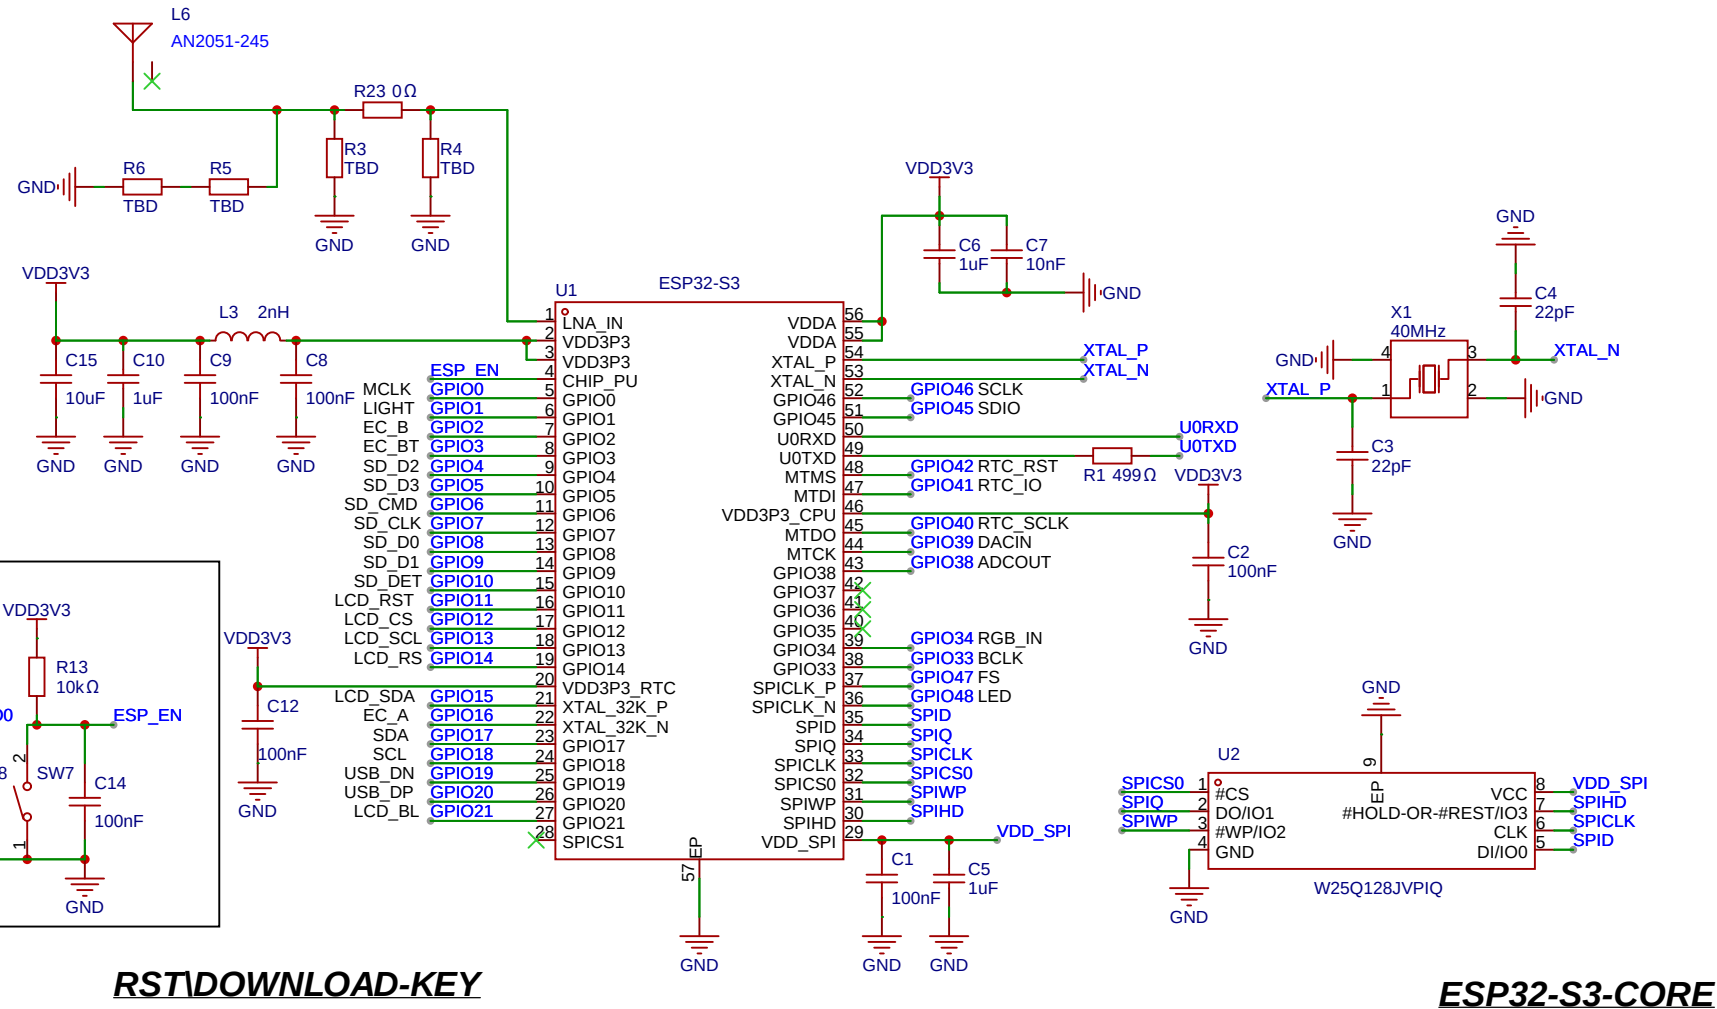
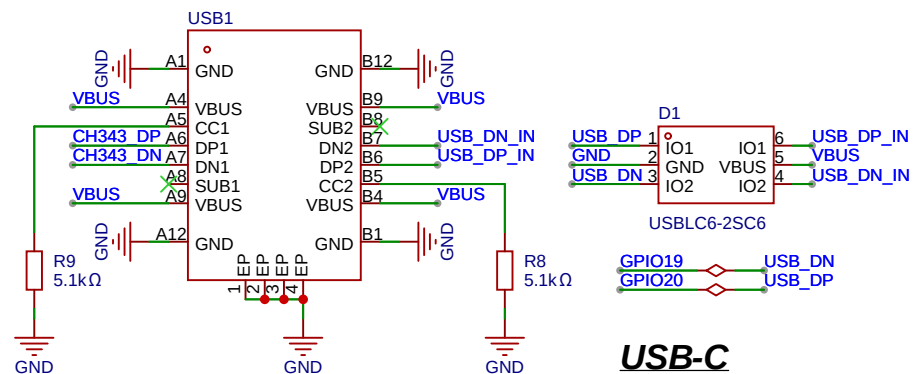


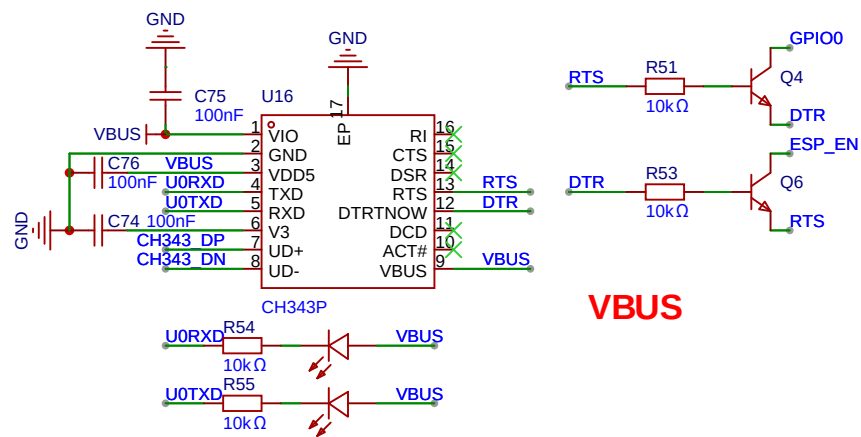

姿态传感器

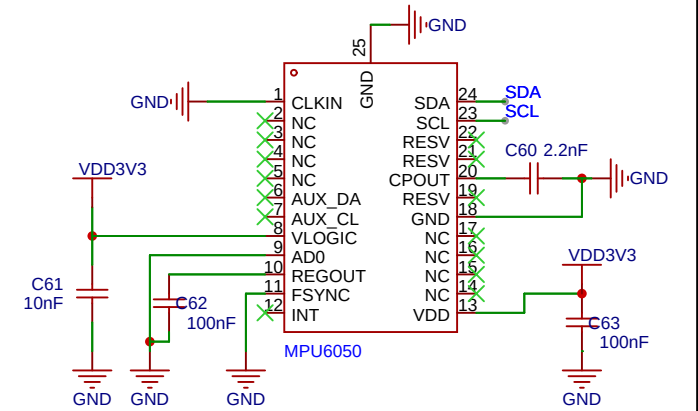


SDA GPIO17
SCL GPIO18



I2C

环境光传感器


LIGHT GPIO1




IO口拓展

Table 2. Address Reference


INPUTS	PC BUS SLAVE ADDRESS
A2 A1 A0	
L L L	32 (deciml, 20 (hexadeciml))
L L H	33 (deciml, 21 (hexadeciml))
L H L	34 (deciml, 22 (hexadeciml))
L H H	35 (deciml, 23 (hexadeciml))
H L L	36 (deciml, 24 (hexadeciml))
H L H	37 (deciml, 25 (hexadeciml))
H H L	38 (deciml, 26 (hexadeciml))
H H H	39 (deciml, 27 (hexadeciml))

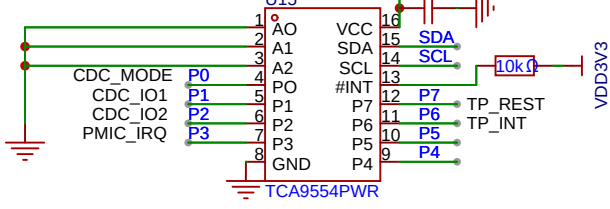



灯珠

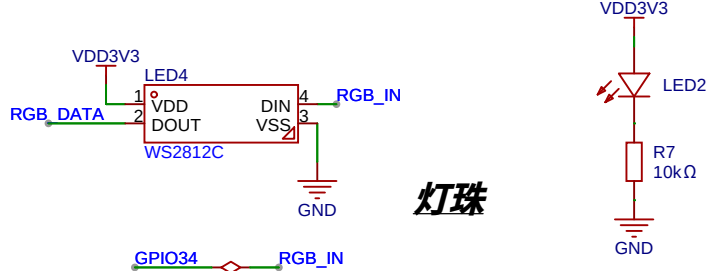


管脚序号	符号	功能	管脚序号	符号	功能
1	VCC2	主用电源	5	RST	复位
2	X1	32.768kHz 晶体	6	I/O	数据输入/输出
3	X2	32.768kHz 晶体	7	SCLK	串行时钟输入
4	GND	地	8	VCC1	备用电源

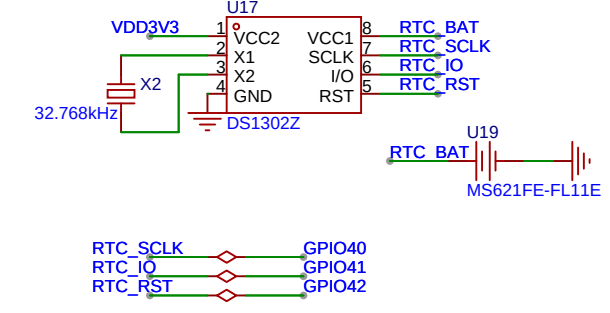


RTC

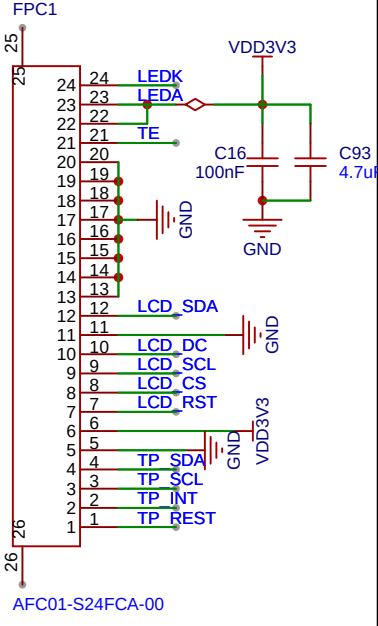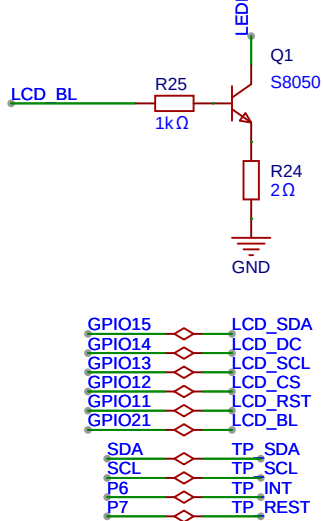

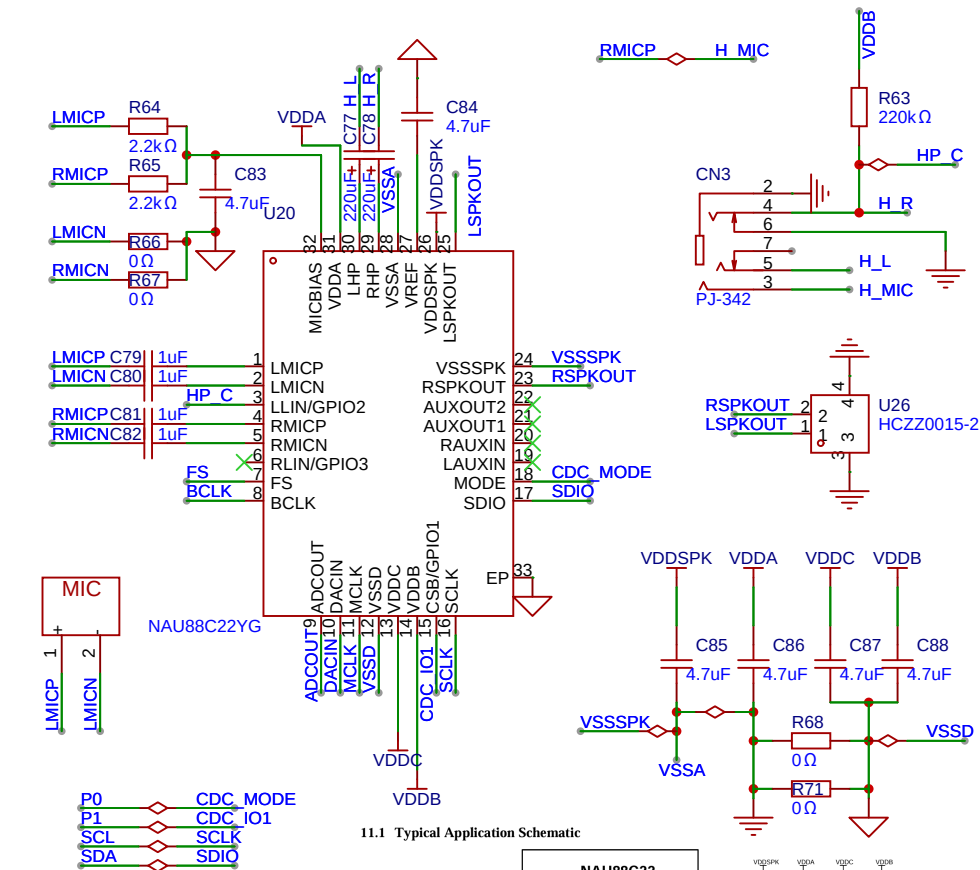



11.1 Typical Application Schematic

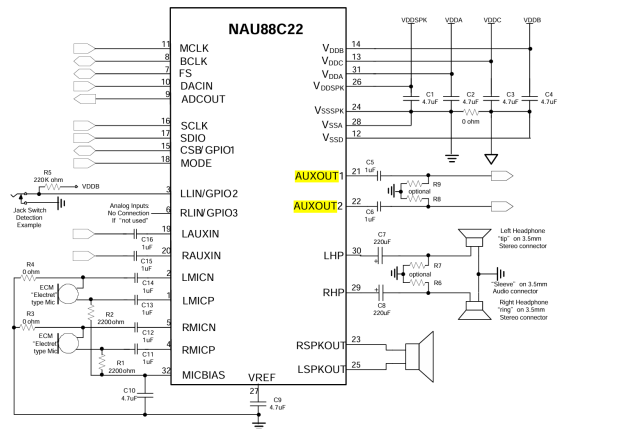

CODEC

VCC

VDD3V3

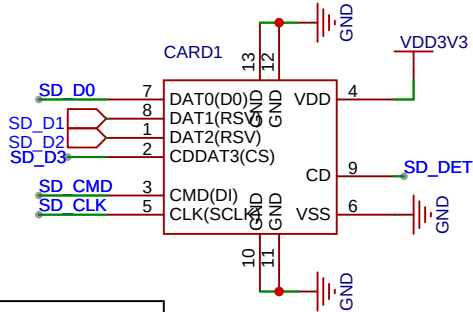

SD卡座