

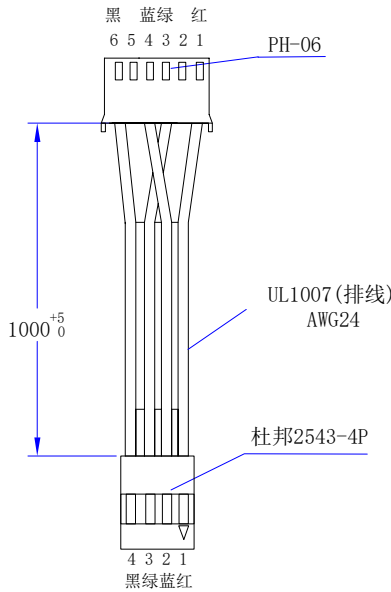
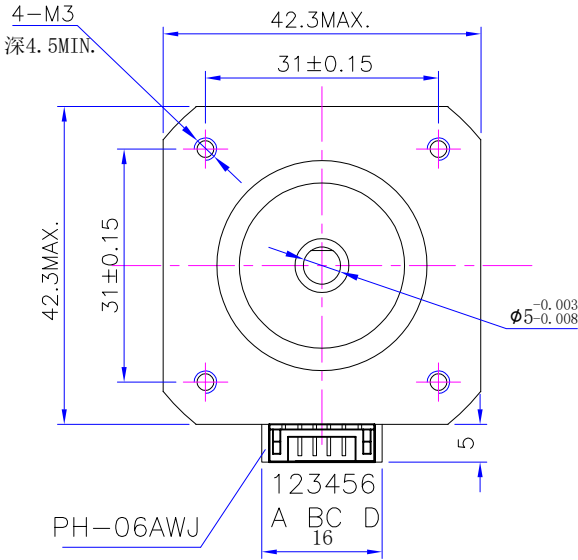


CONFORM TO RoHS DNSTROCTIONS

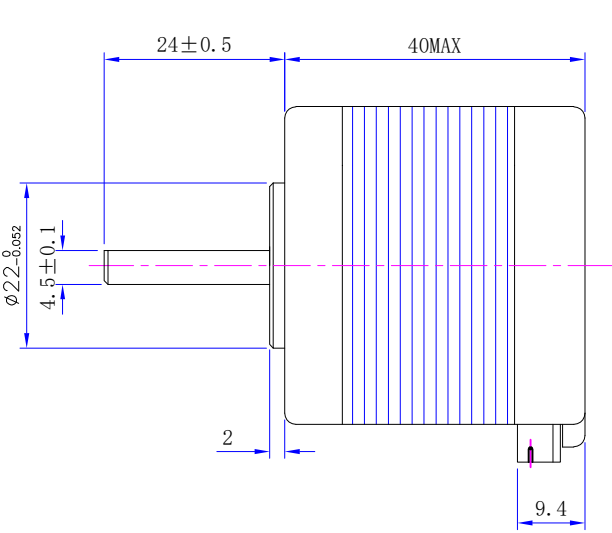


尺寸图 Dimensionai drawing



绕线图 Wiring Diagram



Step angle	1.8° ±5%
Number of phase	2
Phase voltage	3.2 VDC
Phase current	1 Amp
Phase resistance	3.2×(1±15%) Ω
Phase inductance	9.0×(1±20%)mH (1KHz)
Static moment	0.45 N.m
Insulation class	Class B
Insulation resistance	100MΩ min. (500V DC)
Ambient temperature	-20° - +50°
Ambient hum	15% to 95%
Motor weight	Approx 0.286 Kg
Use voltage	VDC:12-36V

					View		 		Shenzhen Fuyuansheng Electronic Technology Co., Ltd..	
					Inverse proportion		1: 1			
REV	Description	Date	INSPECTED	CHECKED	APPROVED	Date	Version	Model	42SHDC4058Z-24B-1000	