




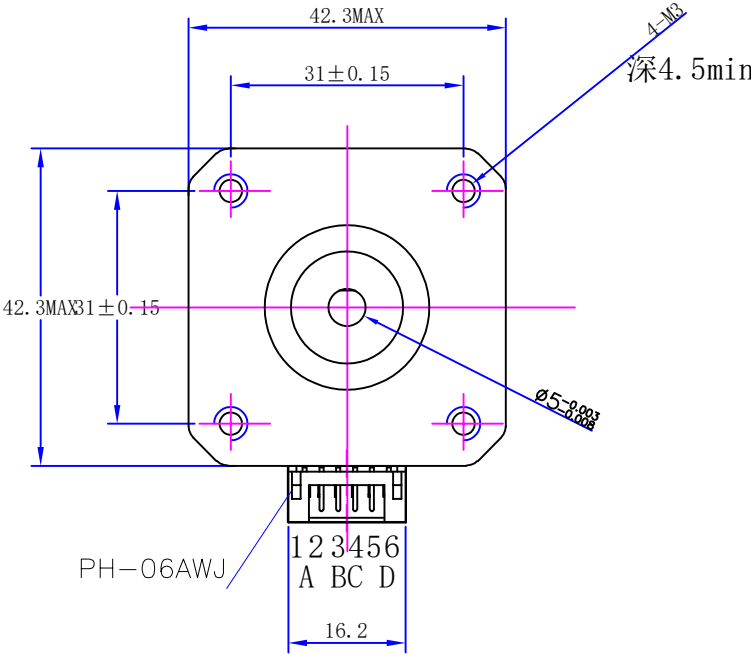

CONFORM TO RoHS DNSTROCTIONS

尺寸图 Dimensionai drawing

绕线图 Wiring Diagram

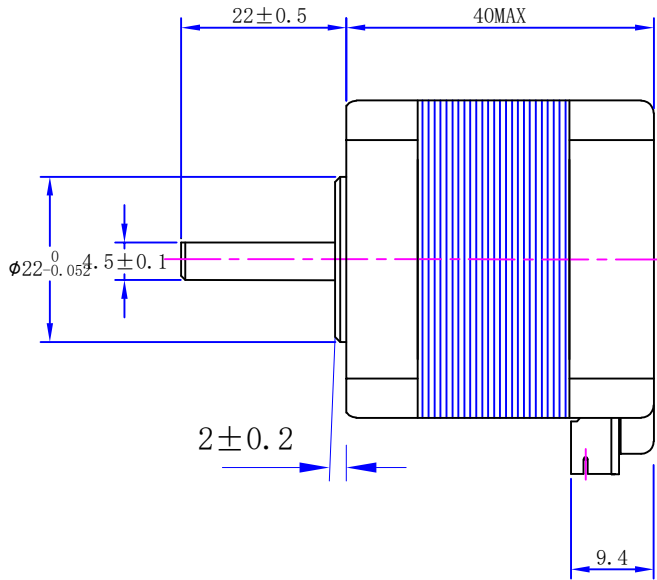

Step angle	1.8° ±5%
Number of phase	2
Phase voltage	3.6 VDC
Phase current	1 Amp
Phase resistance	1.8×(1±10%) Ω
Phase inductance	3.1×(1±20%)mH (At 20° C)
Static moment	0.48 N.m
Insulation class	Class B
Insulation resistance	100MΩ min. (500V DC)
Ambient temperature	-20° - +50°
Ambient hum	15% to 95%
Motor weight	Approx 0.27 Kg
Use voltage	VDC:12-36V

					View				Shenzhen Fuyuansheng Electronic Technology Co., Ltd..	
					Inverse proportion		1: 1			
								A0		
REV	Description	Date	INSPECTED	CHECKED	APPROVED	Date	Version	Model	42SHDC4038Z-22B	