


Please make sure that your heating bed is in line with the voltage of your country or region. The high voltage version will heat very slowly when used at low voltage and may not reach the target temperature. The low-voltage version is used in the high-voltage version to heat up quickly, even exceeding the temperature you set, which is very dangerous.




**HOT SURFACE
DO NOT TOUCH**

AC Heating Bed 110/220V INPUT

Spider v3.0
Voron 2.4 R2

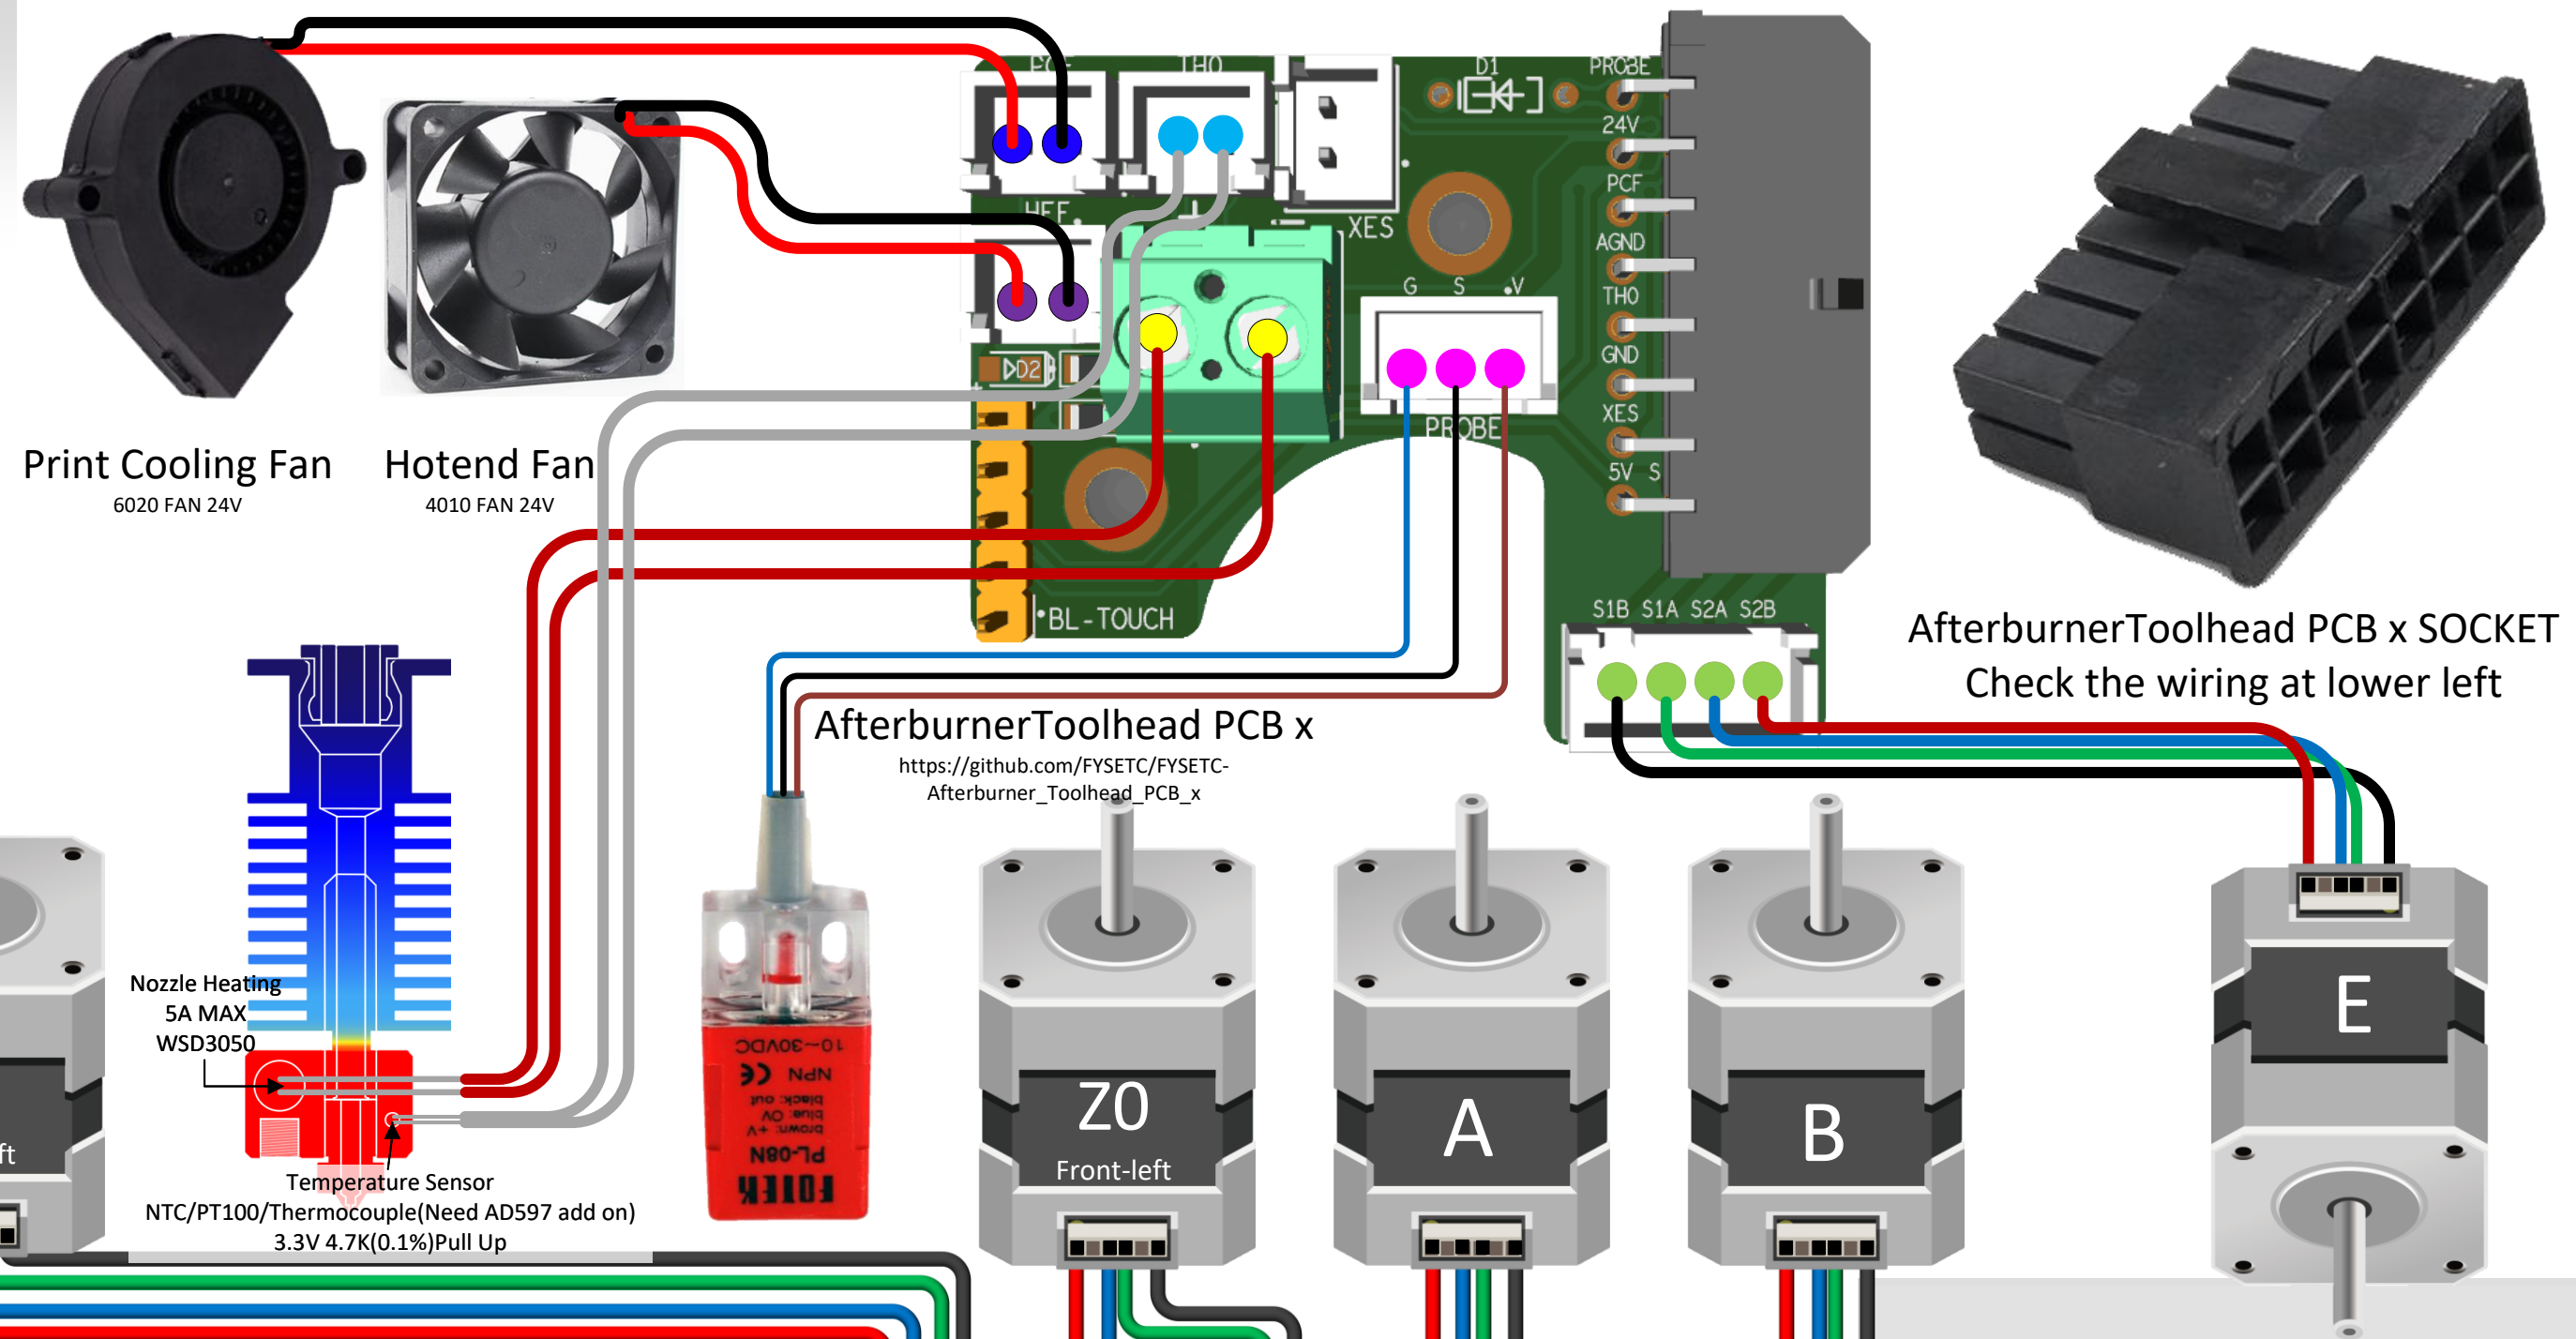


USE FYSETC TMC 2209 V3.1

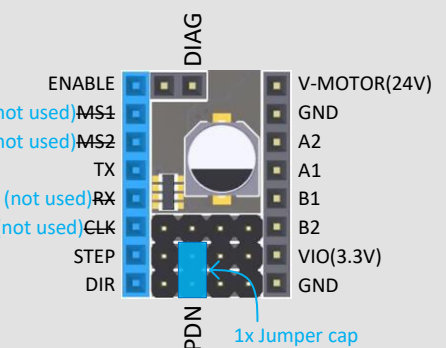

PDN: It is connected to TX for communication between TMC and MCU, using single wire. The jumper cap shown in the figure must be setted before the drive module install.

DIAG: It is used to go home without sensing, while ensuring that the jumper corresponding to the limit is in the closed state.


USE FYSETC TMC5160/5161/2130

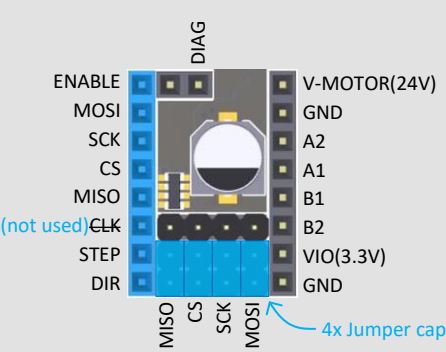

(SPI4 used for TMC driver SPI,CS and PDN share pins)

DIAG: It is used to go home without sensing, while ensuring that the jumper corresponding to the limit is in the closed state.

USE 4988 or 4988like driver

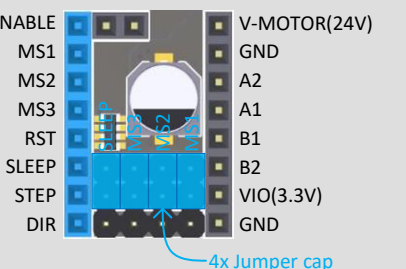


48V Driver Support (M1 & M2) :

1.If you use 24V, you need to connect the 24V-PIN and 48V-PIN, and use the jumper plug that we provide.



2.If you use 48V, you need to connect an external power supply to the 48-PIN and GND-PIN using the connecting wires provided by us.


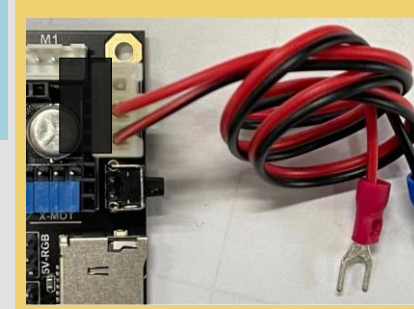


SD Pins Out: You can use the SD Card in a farther position by the SD module, but it is not recommended to exceed 30cm.

The type-C USB socket is used by default, and type-A is also reserved. If you need it, you can Add it by yourself.

USB Pins Out: used to connect the Raspberry Pi inside the printer via USB.

Connect the Raspberry Pi to Spider

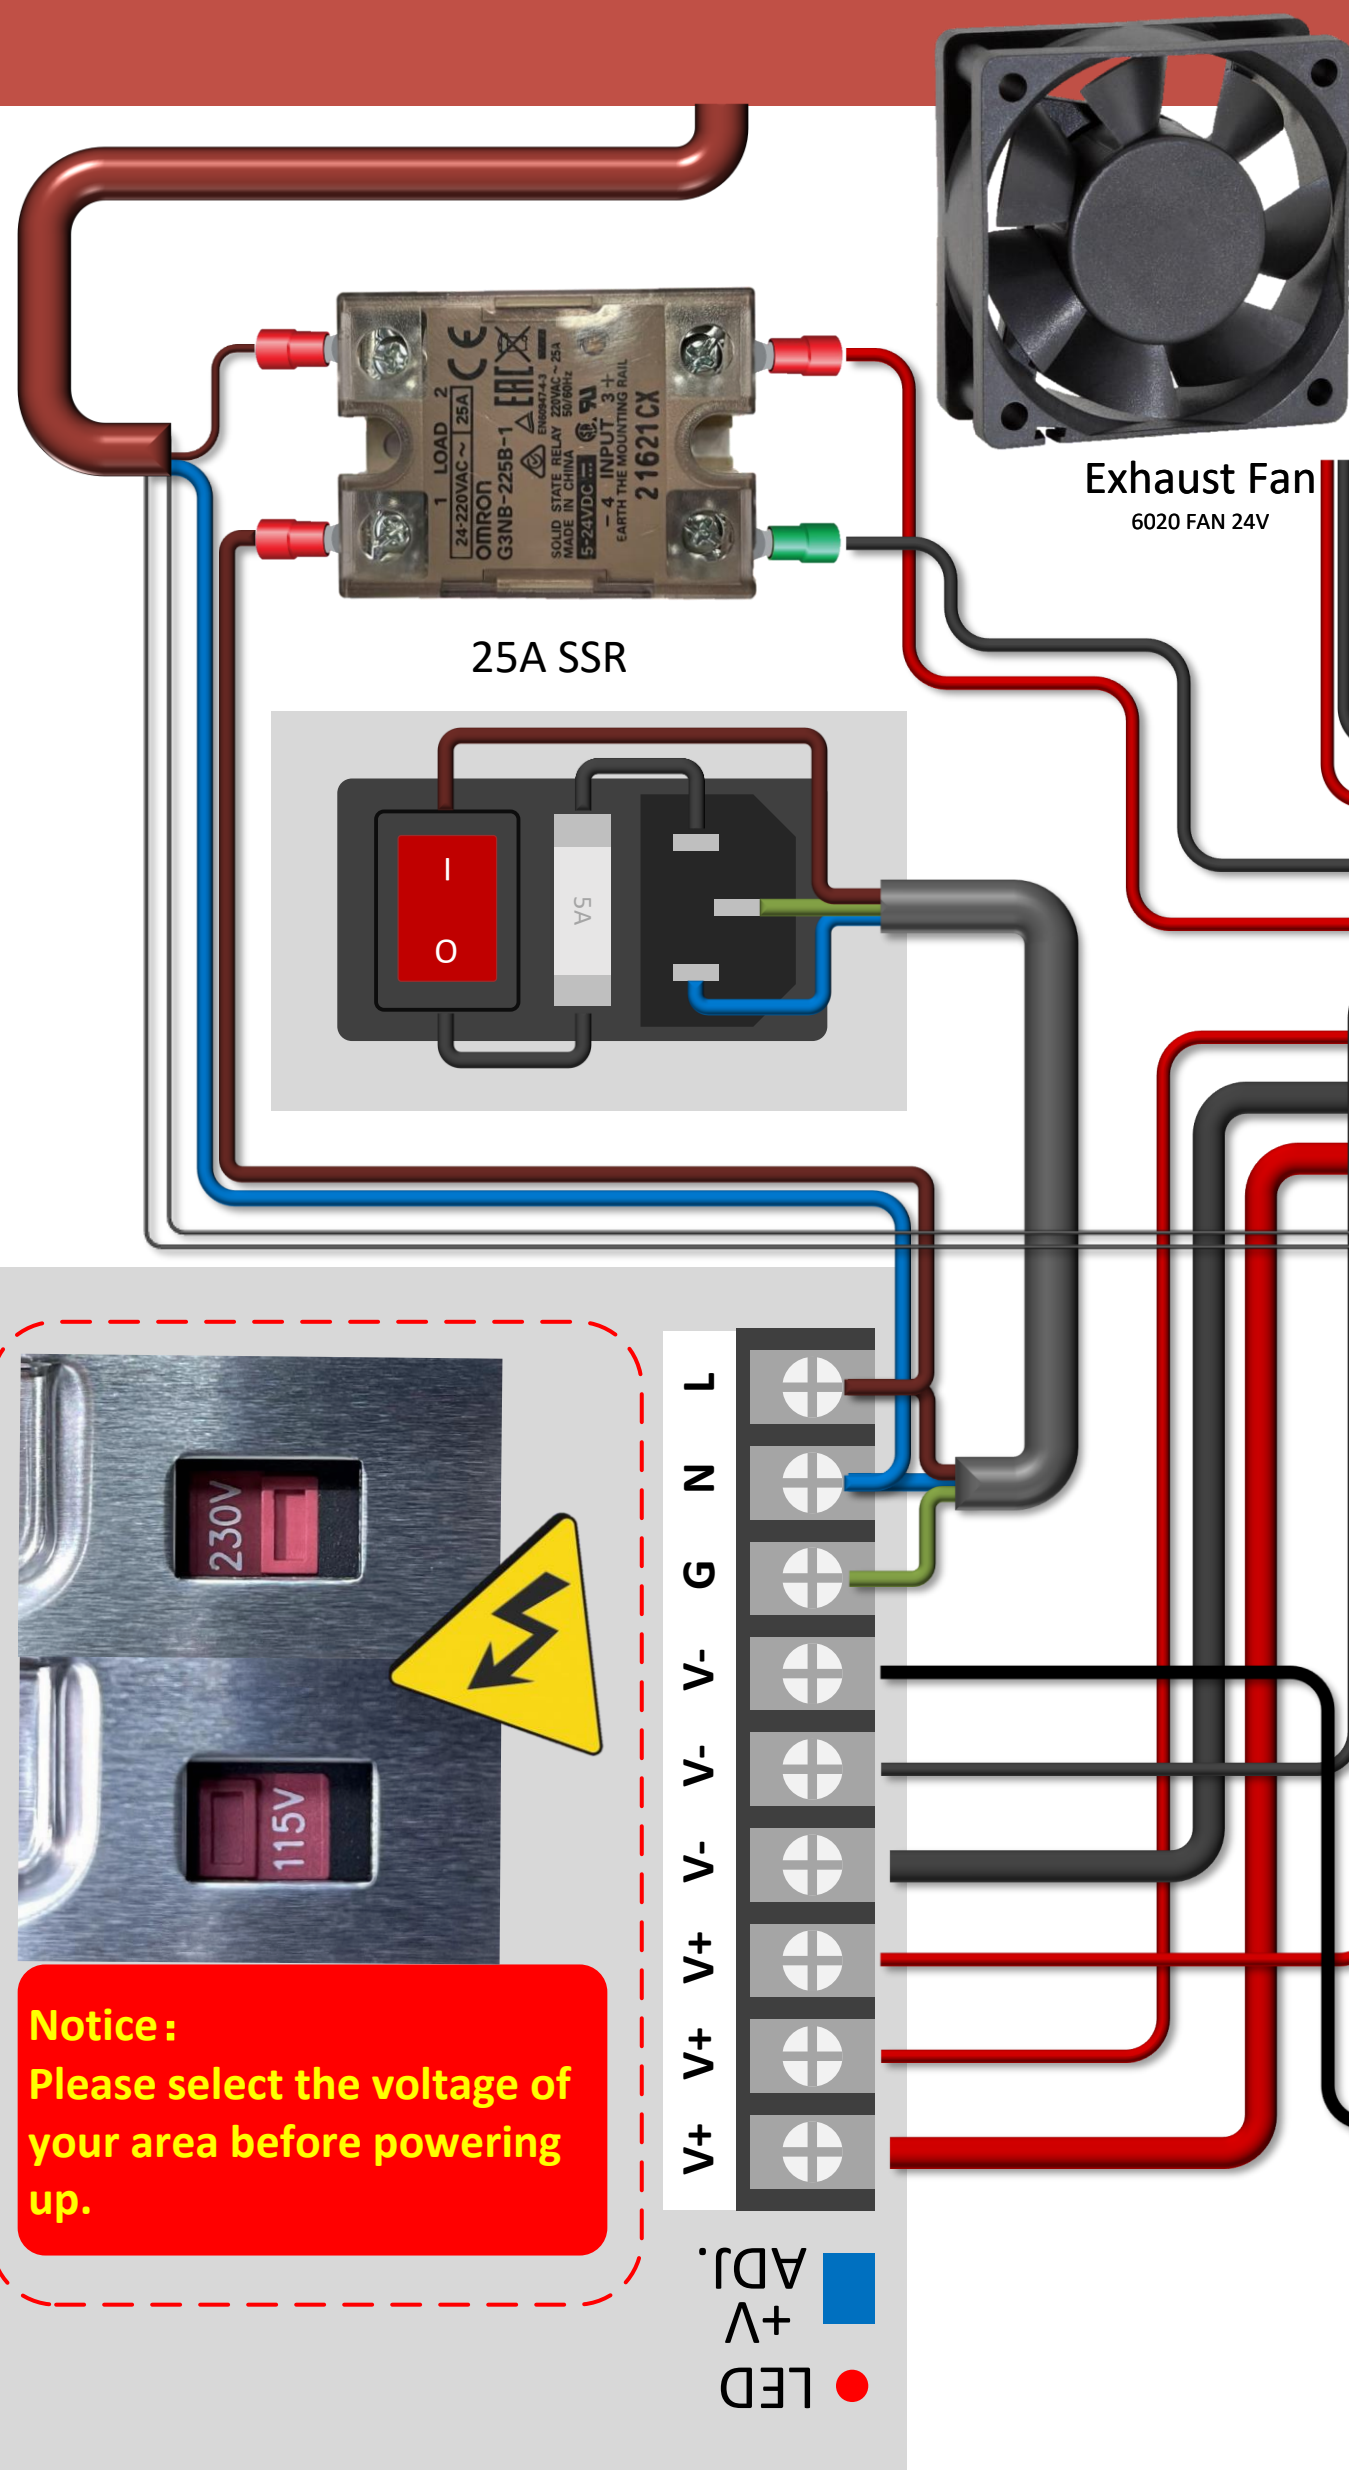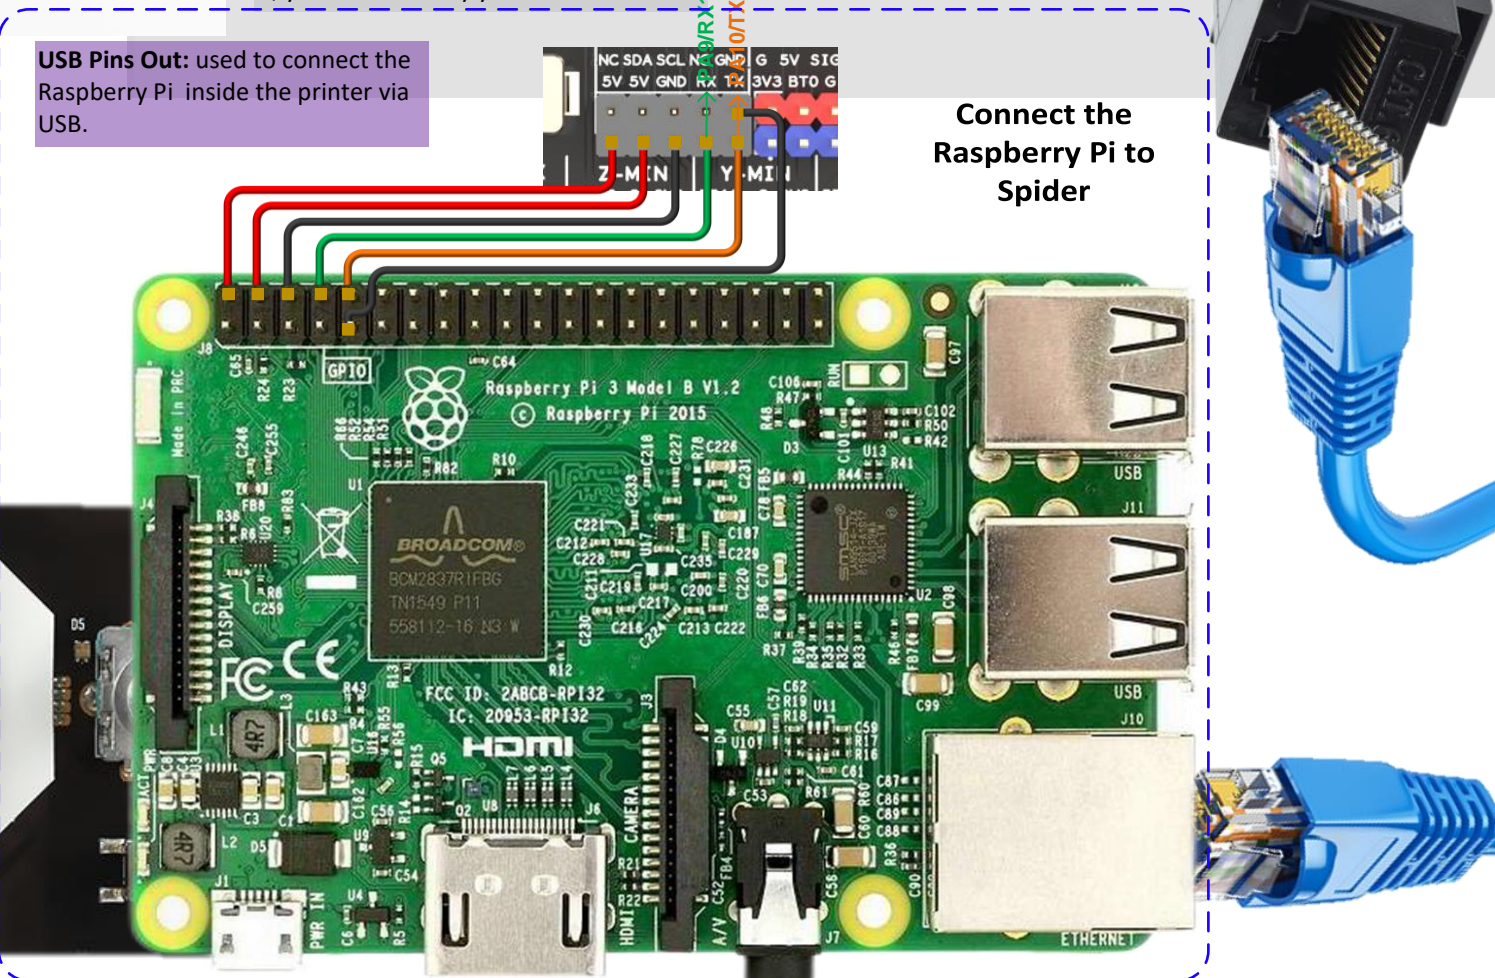

Notice:
Please select the voltage of your area before powering up.

LED
+V
ADJ.

Probe 调平	HE0 加热棒
24V共用	CT 箱体温度
PCF 打印冷却	HEF 热端散热
AGND 模拟地	S2B
TH0 测温	S2A
GND 共用地	S1A
XES 预留	S1B
5V	SERVO

To Spider E-MOTOR socket

AfterburnerToolhead PCB x SOCKET

Controller Fan x2
6020 FAN 24V