


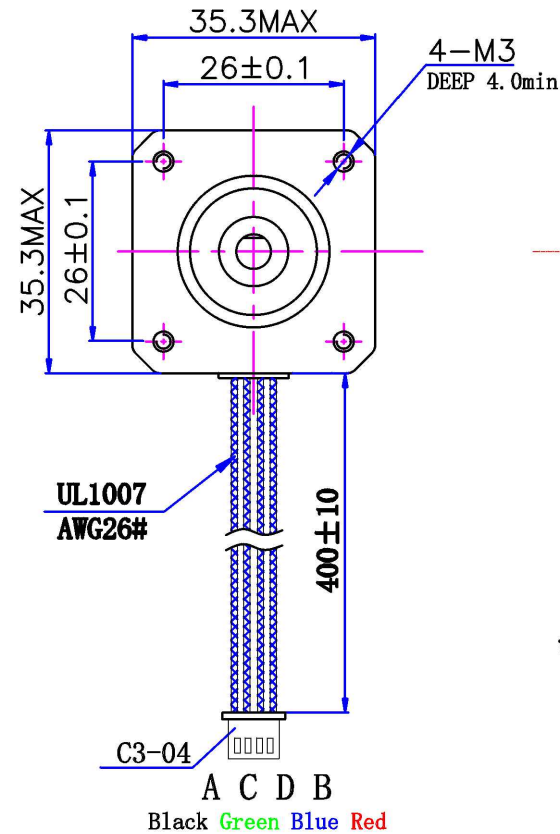


CONFORM TO RoHS DNSTROCTIONS

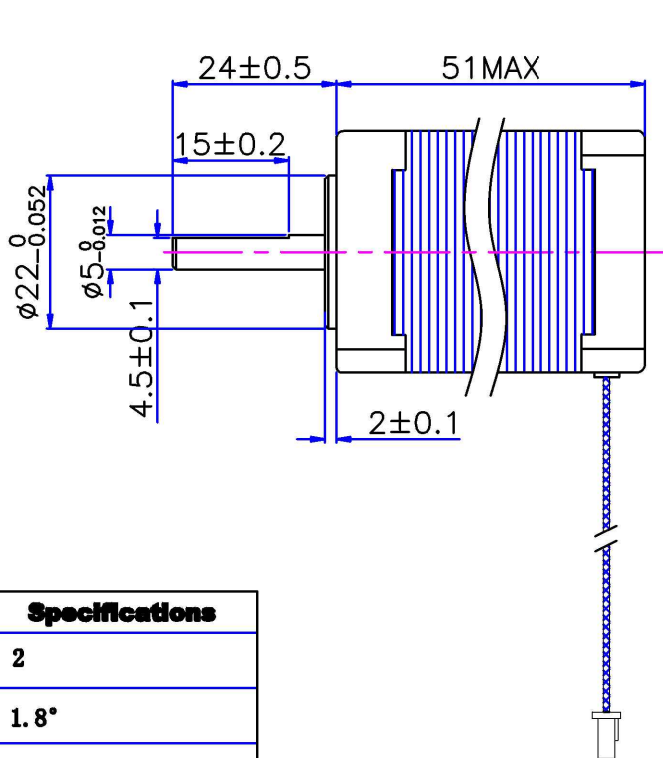


Character	Specifications
Number of phase	2
Step Angle	1.8°
Rated Voltage	DC 4.2V
Rated current	DC 1.5A
Holding Torque	≥ 420mN.m
Winding resistance	2.8±15% ohm (20℃)
Winding inductaoce	5.5±20% mH (1kHz)
Direction of rotation	A-AB-B-CW
Rotor Inertia	48 g.cm²
Weight	0.29Kg
Insulation class	B Class

### Winding drawing



View



Inverse proportion

1: 1

A0

Shenzhen Fuyuanheng  
Electronic Technology  
Co., Ltd..

REV

Description

Date

INSPECTED

CHECKED

APPROVED

Date

Version

Model

MSP-30010-R0055