

TrioCFD Reference Manual V1.8.3

Support team: trust@cea.fr

Link to: **[TRUST Generic Guide](#)**

June 26, 2021

Contents

1	Syntax to define a mathematical function	16
2	Existing & predefined fields names	17
3	interprete	19
3.1	Merge_MED	20
3.2	MultipleFiles	20
3.3	Op_Conv_EF_Stab_CoviMAC_Face	20
3.4	Op_Conv_EF_Stab_PolyMAC_Face	20
3.5	Raffiner_isotrope_parallele	21
3.6	read_med	21
3.7	lire_medfile	22
3.8	Solver_moving_mesh_ALE	22
3.9	bloc_lecture	23
3.10	analyse_angle	23
3.11	associate	23
3.12	associer_algo	24
3.13	associer_pbmng_pbfm	24
3.14	associer_pbmng_pbgglobal	24
3.15	axi	24
3.16	bidim_axi	25
3.17	calculer_moments	25
3.18	lecture_bloc_moment_base	25
3.18.1	calcul	25
3.18.2	centre_de_gravite	25
3.18.3	un_point	26
3.19	corriger_frontiere_periodique	26
3.20	create_domain_from_sous_zone	26
3.21	debog	27
3.22	{	27
3.23	decoupebord	27
3.24	decouper_bord_coincident	28
3.25	dilate	28
3.26	dimension	29
3.27	disable_TU	29
3.28	discretiser_domaine	29
3.29	discretize	29
3.30	distance_paro	30
3.31	ecrire_champ_med	30
3.32	ecrire_fichier_formatte	30
3.33	ecriturelecturespecial	31
3.34	execute_parallel	31
3.35	export	31
3.36	extract_2d_from_3d	31
3.37	extract_2daxi_from_3d	32
3.38	extraire_domaine	32
3.39	extraire_plan	33
3.40	extraire_surface	33
3.41	extrudebord	34
3.42	extrudeparoi	35
3.43	extruder	35
3.44	troisf	36

3.45	extruder_en20	36
3.46	extruder_en3	36
3.47	end	37
3.48	}	37
3.49	imposer_vit_bords_ale	37
3.50	imprimer_flux	38
3.51	imprimer_flux_sum	38
3.52	integrer_champ_med	38
3.53	interprete_geometrique_base	39
3.54	lata_to_med	39
3.55	format_lata_to_med	39
3.56	lata_to_other	39
3.57	lire_ideas	40
3.58	mailler	40
3.59	list_bloc_mailler	40
3.59.1	mailler_base	40
3.59.2	pave	41
3.59.3	bloc_pave	41
3.59.4	list_bord	42
3.59.5	bord_base	42
3.59.6	bord	42
3.59.7	defbord	43
3.59.8	defbord_2	43
3.59.9	defbord_3	43
3.59.10	raccord	44
3.59.11	internes	44
3.59.12	epsilon	44
3.59.13	domain	44
3.60	maillerparallel	45
3.61	modif_bord_to_raccord	46
3.62	moyenne_volumique	46
3.63	nettoiepasnoeuds	47
3.64	option_vdf	47
3.65	orientefacesbord	48
3.66	partition	48
3.67	bloc_decouper	48
3.68	pilote_icoco	49
3.69	polyedriser	50
3.70	porosites	50
3.71	bloc_lecture_poro	50
3.72	porosites_champ	51
3.73	postraiter_domaine	51
3.74	precisiongeom	52
3.75	raffiner_anisotrope	52
3.76	raffiner_isotrope	53
3.77	read	53
3.78	read_file	54
3.79	read_file_binary	54
3.80	lire_tgrid	54
3.81	read_unsupported_ascii_file_from_icem	55
3.82	orienter_simplexes	55
3.83	redresser_hexaedres_vdf	55
3.84	refine_mesh	55
3.85	regroupebord	56

3.86	remove_elem	56
3.87	remove_elem_bloc	56
3.88	remove_invalid_internal_boundaries	57
3.89	reorienter_tetraedres	57
3.90	reorienter_triangles	57
3.91	reordonner	58
3.92	rotation	58
3.93	scatter	58
3.94	scattermed	59
3.95	solve	59
3.96	supprime_bord	59
3.97	list_nom	59
3.98	system	60
3.99	test_solveur	60
3.100	testeur	60
3.101	testeur_medcoupling	61
3.102	tetraedriser	61
3.103	tetraedriser_homogene	62
3.104	tetraedriser_homogene_compact	62
3.105	tetraedriser_homogene_fin	63
3.106	tetraedriser_par_prisme	63
3.107	transformer	64
3.108	triangler	64
3.109	triangler_fin	65
3.110	triangler_h	65
3.111	verifier_qualite_raffinements	66
3.112	vect_nom	66
3.113	verifier_simplexes	66
3.114	verifiercoin	66
3.115	verifiercoin_bloc	67
3.116	ecrire	67
3.117	ecrire_fichier_bin	67
3.118	ecrire_med	68
3.119	ecrire_medfile	68
4	pb_gen_base	68
4.1	Pb_Conduction	68
4.2	corps_postraitemnt	69
4.2.1	definition_champs	70
4.2.2	definition_champ	70
4.2.3	sondes	70
4.2.4	sonde	71
4.2.5	sonde_base	71
4.2.6	points	71
4.2.7	listpoints	72
4.2.8	point	72
4.2.9	segmentpoints	72
4.2.10	numero_elem_sur_maitre	72
4.2.11	position_like	72
4.2.12	segment	73
4.2.13	plan	73
4.2.14	volume	73
4.2.15	circle	74
4.2.16	circle_3	74

4.2.17	segmentfacesx	74
4.2.18	segmentfacesy	74
4.2.19	segmentfacesz	75
4.2.20	champs_posts	75
4.2.21	champs_a_post	75
4.2.22	champ_a_post	75
4.2.23	stats_posts	76
4.2.24	list_stat_post	77
4.2.25	stat_post_deriv	77
4.2.26	t_deb	77
4.2.27	t_fin	77
4.2.28	moyenne	78
4.2.29	ecart_type	78
4.2.30	correlation	78
4.2.31	stats_serie_posts	78
4.3	post_processings	79
4.3.1	un_postraitement	79
4.4	liste_post_ok	80
4.4.1	nom_postraitement	80
4.4.2	postraitement_base	80
4.4.3	post_processing	80
4.4.4	postraitement_ft_lata	81
4.5	liste_post	81
4.5.1	un_postraitement_spec	81
4.5.2	type_un_post	82
4.5.3	type_postraitement_ft_lata	82
4.6	format_file	82
4.7	Pb_Hydraulique_Turbulent_ALE	82
4.8	Pb_Hydraulique_sensibility	83
4.9	Pb_Thermohydraulique_sensibility	84
4.10	Pb_base	85
4.11	probleme_couple	86
4.12	list_list_nom	87
4.13	modele_rayo_semi_transp	87
4.14	eq_rayo_semi_transp	88
4.14.1	condlims	88
4.14.2	condlimlu	88
4.15	pb_avec_passif	89
4.16	listeqn	90
4.17	pb_couple_rayo_semi_transp	90
4.18	pb_hydraulique	90
4.19	pb_hydraulique_ALE	91
4.20	pb_hydraulique_concentration	92
4.21	pb_hydraulique_concentration_scalaires_passifs	93
4.22	pb_hydraulique_concentration_turbulent	94
4.23	pb_hydraulique_concentration_turbulent_scalaires_passifs	96
4.24	pb_hydraulique_melange_binaire_qc	97
4.25	pb_hydraulique_melange_binaire_turbulent_qc	98
4.26	pb_hydraulique_turbulent	99
4.27	pb_mg	100
4.28	pb_phase_field	100
4.29	pb_post	101
4.30	pb_thermohydraulique	102
4.31	pb_thermohydraulique_concentration	103

4.32	pb_thermohydraulique_concentration_scalaires_passifs	104
4.33	pb_thermohydraulique_concentration_turbulent	105
4.34	pb_thermohydraulique_concentration_turbulent_scalaires_passifs	106
4.35	pb_thermohydraulique_qc	108
4.36	pb_thermohydraulique_qc_fraction_massique	109
4.37	pb_thermohydraulique_scalaires_passifs	110
4.38	pb_thermohydraulique_turbulent	111
4.39	pb_thermohydraulique_turbulent_qc	112
4.40	pb_thermohydraulique_turbulent_qc_fraction_massique	113
4.41	pb_thermohydraulique_turbulent_scalaires_passifs	114
4.42	pbc_med	115
4.43	list_info_med	116
4.43.1	info_med	116
4.44	problem_read_generic	116
4.45	pb_couple_rayonnement	117
4.46	probleme_ft_disc_gen	117
5	mor_eqn	118
5.1	Conduction	119
5.2	bloc_convection	120
5.2.1	convection_deriv	120
5.2.2	amont	120
5.2.3	amont_old	120
5.2.4	centre	120
5.2.5	centre4	121
5.2.6	centre_old	121
5.2.7	di_l2	121
5.2.8	ef	121
5.2.9	bloc_ef	122
5.2.10	muscl3	122
5.2.11	ef_stab	122
5.2.12	listsous_zone_valeur	123
5.2.13	sous_zone_valeur	123
5.2.14	generic	123
5.2.15	kquick	124
5.2.16	muscl	124
5.2.17	muscl_old	124
5.2.18	muscl_new	124
5.2.19	negligeable	124
5.2.20	quick	125
5.2.21	supg	125
5.2.22	btd	125
5.2.23	ale	125
5.2.24	sensibility	126
5.2.25	RT	126
5.3	bloc_diffusion	126
5.3.1	diffusion_deriv	126
5.3.2	negligeable	127
5.3.3	p1b	127
5.3.4	p1ncp1b	127
5.3.5	stab	127
5.3.6	standard	128
5.3.7	bloc_diffusion_standard	128
5.3.8	option	129

5.3.9	tenseur_Reynolds_externe	129
5.3.10	op_implicite	129
5.4	condinit	129
5.4.1	condinit	129
5.5	sources	130
5.6	ecrire_fichier_xyz_valeur_param	130
5.6.1	ecrire_fichier_xyz_valeur_item	130
5.6.2	bords_ecrire	130
5.7	parametre_equation_base	131
5.7.1	parametre_diffusion_implicite	131
5.7.2	parametre_implicite	131
5.8	Convection_Diffusion_Concentration_Turbulent_FT_Disc	132
5.9	Convection_Diffusion_Temperature_sensibility	134
5.10	pp	135
5.10.1	penalisation_l2_ftd_lec	135
5.11	Navier_Stokes_Turbulent_ALE	136
5.12	modele_turbulence_hyd_deriv	137
5.12.1	dt_impr_ustar_mean_only	138
5.12.2	mod_turb_hyd_ss_maille	138
5.12.3	form_a_nb_points	139
5.12.4	sous_maille_selectif_mod	139
5.12.5	deuxentiers	140
5.12.6	floatentier	141
5.12.7	sous_maille_selectif	141
5.12.8	sous_maille_1elt	142
5.12.9	sous_maille_1elt_selectif_mod	143
5.12.10	sous_maille_axi	144
5.12.11	sous_maille_smago_filtre	145
5.12.12	sous_maille_smago_dyn	146
5.12.13	sous_maille_wale	147
5.12.14	sous_maille_smago	148
5.12.15	combinaison	150
5.12.16	longueur_melange	151
5.12.17	sous_maille	152
5.12.18	NUL	153
5.12.19	mod_turb_hyd_rans	154
5.12.20	k_epsilon	155
5.12.21	modele_fonction_bas_reynolds_base	156
5.12.22	Lam_Bremhorst	156
5.12.23	standard_KEps	157
5.12.24	EASM_Baglietto	157
5.12.25	Jones_Launder	157
5.12.26	Launder_Sharma	157
5.12.27	K_Epsilon_Realisable	158
5.13	Navier_Stokes_standard_sensibility	159
5.14	deuxmots	161
5.15	floatfloat	161
5.16	traitement_particulier	161
5.16.1	traitement_particulier_base	162
5.16.2	temperature	162
5.16.3	canal	162
5.16.4	ec	163
5.16.5	thi	163
5.16.6	thi_thermo	164

5.16.7	chmoy_faceperio	165
5.16.8	profils_thermo	165
5.16.9	brech	165
5.16.10	ceg	166
5.16.11	ceg_areva	166
5.16.12	ceg_cea_jaea	166
5.17	Navier_Stokes_std_ALE	167
5.18	Transport_K_Eps_Realisable	168
5.19	convection_diffusion_chaleur_qc	169
5.20	convection_diffusion_chaleur_turbulent_qc	170
5.21	convection_diffusion_concentration	171
5.22	convection_diffusion_concentration_ft_disc	172
5.23	convection_diffusion_concentration_turbulent	174
5.24	convection_diffusion_fraction_massique_mb_qc	175
5.25	convection_diffusion_fraction_massique_mb_turbulent_qc	176
5.26	convection_diffusion_fraction_massique_qc	177
5.27	convection_diffusion_fraction_massique_turbulent_qc	178
5.28	convection_diffusion_phase_field	179
5.29	convection_diffusion_temperature	180
5.30	convection_diffusion_temperature_ft_disc	181
5.31	objet_lecture_maintien_temperature	183
5.32	convection_diffusion_temperature_turbulent	183
5.33	eqn_base	184
5.34	navier_stokes_ft_disc	185
5.35	penalisation_forage	188
5.36	navier_stokes_phase_field	189
5.37	approx_boussinesq	191
5.37.1	bloc_boussinesq	191
5.37.2	bloc_rho_fonc_c	192
5.38	visco_dyn_cons	192
5.38.1	bloc_visco2	192
5.38.2	bloc_mu_fonc_c	193
5.39	navier_stokes_qc	193
5.40	navier_stokes_standard	195
5.41	navier_stokes_turbulent	197
5.42	navier_stokes_turbulent_qc	199
5.43	transport_interfaces_ft_disc	201
5.44	methode_transport_deriv	205
5.44.1	loi_horaire	205
5.44.2	vitesse_imposee	205
5.44.3	vitesse_interpolee	206
5.45	bloc_lecture_remaillage	206
5.46	parcours_interface	207
5.47	interpolation_champ_face_deriv	208
5.47.1	base	208
5.47.2	lineaire	208
5.48	transport_k_epsilon	208
5.49	transport_marqueur_ft	209
5.50	injection_marqueur	211
6	algo_base	211
6.1	algo_couple_1	212

7	/*	212
7.1	/*	212
8	champ_generique_base	212
8.1	champ_post_de_champs_post	212
8.2	list_nom_virgule	213
8.3	listchamp_generique	213
8.4	champ_post_operateur_base	213
8.5	champ_post_operateur_eqn	214
8.6	champ_post_statistiques_base	214
8.7	correlation	215
8.8	champ_post_operateur_divergence	215
8.9	ecart_type	216
8.10	champ_post_extraction	217
8.11	champ_post_operateur_gradient	217
8.12	champ_post_interpolation	218
8.13	champ_post_morceau_equation	218
8.14	moyenne	219
8.15	predefini	220
8.16	champ_post_reduction_0d	220
8.17	champ_post_refchamp	221
8.18	champ_post_tparoi_vef	221
8.19	champ_post_transformation	222
9	chimie	223
9.1	reactions	223
9.1.1	reaction	223
10	class_generic	224
10.1	Modele_Fonc_Realisable	224
10.2	Modele_Fonc_Realisable_base	224
10.3	Modele_Shih_Zhu_Lumley_VDF	225
10.4	Shih_Zhu_Lumley	225
10.5	amgx	225
10.6	cholesky	225
10.7	dt_calc	226
10.8	dt_fixe	226
10.9	dt_min	226
10.10	dt_start	226
10.11	gcp_ns	227
10.12	gen	227
10.13	gmres	228
10.14	optimal	229
10.15	petsc	229
10.16	gcp	233
10.17	solveur_sys_base	234
11	#	234
11.1	#	234

12	condlim_base	234
12.1	Neumann_homogene	234
12.2	Neumann_paro_adiabatique	235
12.3	Paroi	235
12.4	contact_vdf_vef	235
12.5	contact_vef_vdf	235
12.6	dirichlet	235
12.7	echange_contact_rayo_transp_vdf	236
12.8	echange_contact_vdf_ft_disc	236
12.9	echange_contact_vdf_ft_disc_solid	236
12.10	entree_temperature_imposee_h	237
12.11	flux_radiatif	237
12.12	flux_radiatif_vdf	237
12.13	flux_radiatif_vef	238
12.14	frontiere_ouverte	238
12.15	frontiere_ouverte_concentration_imposee	238
12.16	frontiere_ouverte_fraction_massique_imposee	239
12.17	frontiere_ouverte_gradient_pression_impose	239
12.18	frontiere_ouverte_gradient_pression_impose_vefprep1b	239
12.19	frontiere_ouverte_gradient_pression_libre_vef	239
12.20	frontiere_ouverte_gradient_pression_libre_vefprep1b	240
12.21	frontiere_ouverte_k_eps_impose	240
12.22	frontiere_ouverte_pression_imposee	240
12.23	frontiere_ouverte_pression_imposee_orlansky	240
12.24	frontiere_ouverte_pression_moyenne_imposee	240
12.25	frontiere_ouverte_rayo_semi_transp	241
12.26	frontiere_ouverte_rayo_transp	241
12.27	frontiere_ouverte_rayo_transp_vdf	241
12.28	frontiere_ouverte_rayo_transp_vef	242
12.29	frontiere_ouverte_rho_u_impose	242
12.30	frontiere_ouverte_temperature_imposee	242
12.31	frontiere_ouverte_temperature_imposee_rayo_semi_transp	242
12.32	frontiere_ouverte_temperature_imposee_rayo_transp	243
12.33	frontiere_ouverte_vitesse_imposee	243
12.34	frontiere_ouverte_vitesse_imposee_sortie	243
12.35	neumann	243
12.36	paroi_adiabatique	244
12.37	paroi_contact	244
12.38	paroi_contact_fictif	244
12.39	paroi_decalee_robin	245
12.40	paroi_defilante	245
12.41	paroi_echange_contact_correlation_vdf	245
12.42	paroi_echange_contact_correlation_vef	246
12.43	paroi_echange_contact_odvm_vdf	247
12.44	paroi_echange_contact_rayo_semi_transp_vdf	248
12.45	paroi_echange_contact_vdf	248
12.46	paroi_echange_contact_vdf_ft	248
12.47	paroi_echange_contact_vdf_zoom_fin	249
12.48	paroi_echange_contact_vdf_zoom_grossier	249
12.49	paroi_echange_externe_impose	249
12.50	paroi_echange_externe_impose_h	250
12.51	paroi_echange_externe_impose_rayo_semi_transp	250
12.52	paroi_echange_externe_impose_rayo_transp	250
12.53	paroi_echange_global_impose	251

12.54	paroi_fixe	251
12.55	paroi_fixe_iso_Genepi2_sans_contribution_aux_vitesses_sommets	251
12.56	paroi_flux_impose	251
12.57	paroi_flux_impose_rayo_semi_transp_vdf	252
12.58	paroi_flux_impose_rayo_semi_transp_vef	252
12.59	paroi_flux_impose_rayo_transp	252
12.60	paroi_ft_disc	252
12.61	paroi_ft_disc_deriv	253
12.61.1	symetrie	253
12.61.2	constant	253
12.62	paroi_knudsen_non_negligeable	253
12.63	paroi_rugueuse	254
12.64	paroi_temperature_imposee	254
12.65	paroi_temperature_imposee_rayo_semi_transp	254
12.66	paroi_temperature_imposee_rayo_transp	254
12.67	periodique	255
12.68	scalaire_impose_paro	255
12.69	sortie_libre_rho_variable	255
12.70	sortie_libre_temperature_imposee_h	255
12.71	symetrie	256
12.72	temperature_imposee_paro	256
13	discretisation_base	256
13.1	covimac	256
13.2	ef	256
13.3	polymac	256
13.4	vdf	257
13.5	vef	257
13.6	vefprep1b	257
14	domaine	258
14.1	domaine_ale	258
15	espece	258
16	champ_base	258
16.1	champ_base	258
16.2	Champ_Fonc_MED_Tabule	259
16.3	decoup	259
16.4	Champ_Fonc_MEDfile	259
16.5	Champ_Tabule_Morceaux	260
16.6	champ_don_base	260
16.7	champ_don_lu	260
16.8	champ_fonc_fonction	260
16.9	champ_fonc_fonction_txyz	261
16.10	champ_fonc_fonction_txyz_morceaux	261
16.11	champ_fonc_med	261
16.12	champ_fonc_reprise	262
16.13	fonction_champ_reprise	262
16.14	champ_fonc_t	263
16.15	champ_fonc_tabule	263
16.16	champ_init_canal_sinal	263
16.17	bloc_lec_champ_init_canal_sinal	263
16.18	champ_input_base	264

16.19	champ_input_p0	265
16.20	champ_ostwald	265
16.21	champ_som_lu_vdf	265
16.22	champ_som_lu_vef	266
16.23	champ_tabule_temps	266
16.24	champ_uniforme_morceaux	266
16.25	champ_uniforme_morceaux_tabule_temps	267
16.26	champ_fonc_txyz	267
16.27	champ_fonc_xyz	267
16.28	field_uniform_keps_from_ud	268
16.29	init_par_partie	268
16.30	tayl_green	268
16.31	uniform_field	268
16.32	valeur_totale_sur_volume	269
17	champ_front_base	269
17.1	champ_front_base	269
17.2	Boundary_field_keps_from_ud	269
17.3	Ch_front_input_ALE	270
17.4	Champ_front_ale	270
17.5	Champ_front_debit_QC_VDF	270
17.6	Champ_front_debit_QC_VDF_fonc_t	271
17.7	Champ_front_synt	271
17.8	bloc_lecture_turb_synt	271
17.9	boundary_field_inward	272
17.10	boundary_field_uniform_keps_from_ud	272
17.11	ch_front_input	272
17.12	ch_front_input_uniforme	273
17.13	champ_front_MED	273
17.14	champ_front_bruite	274
17.15	champ_front_calc	274
17.16	champ_front_contact_rayo_semi_transp_vef	274
17.17	champ_front_contact_rayo_transp_vef	275
17.18	champ_front_contact_vef	275
17.19	champ_front_debit	275
17.20	champ_front_debit_massique	276
17.21	champ_front_fonc_pois_ipsn	276
17.22	champ_front_fonc_pois_tube	276
17.23	champ_front_fonc_t	276
17.24	champ_front_fonc_txyz	277
17.25	champ_front_fonc_xyz	277
17.26	champ_front_fonction	277
17.27	champ_front_lu	277
17.28	champ_front_normal_vef	278
17.29	champ_front_pression_from_u	278
17.30	champ_front_recyclage	278
17.31	champ_front_tabule	280
17.32	champ_front_tangentiel_vef	280
17.33	champ_front_uniforme	281
17.34	champ_front_vortex	281
17.35	champ_front_xyz_debit	281
17.36	champ_front_zoom	282

18 interpolation_ibm_base	282
18.1 ibm_aucune	282
18.2 ibm_element_fluide	282
18.3 ibm_hybride	283
18.4 ibm_gradient_moyen	283
19 loi_etat_base	284
19.1 gaz_reel_rhot	284
19.2 melange_binaire	284
19.3 melange_gaz_parfait	285
19.4 gaz_parfait	285
19.5 rho_T	286
20 loi_fermeture_base	286
20.1 loi_fermeture_test	286
21 loi_horaire	287
22 milieu_base	287
22.1 Solide	287
22.2 constituant	288
22.3 fluide_diphasique	288
22.4 fluide_incompressible	289
22.5 fluide_ostwald	289
22.6 fluide_quasi_compressible	290
22.7 bloc_sutherland	291
23 milieu_v2_base	291
24 modele_rayonnement_base	292
24.1 modele_rayonnement_milieu_transparent	292
25 modele_turbulence_scal_base	293
25.1 prandtl	294
25.2 schmidt	294
25.3 sous_maille_dyn	295
26 nom	296
26.1 nom_anonyme	296
27 partitionneur_deriv	296
27.1 fichier_decoupage	296
27.2 metis	297
27.3 partition	298
27.4 sous_domaine	298
27.5 sous_zones	298
27.6 tranche	299
27.7 union	299
28 precondition_base	300
28.1 ilu	300
28.2 precondition_solv	300
28.3 ssor	300
28.4 ssor_bloc	301

29	schema_temps_base	301
29.1	implicit_euler_steady_scheme	303
29.2	Sch_CN_EX_iteratif	305
29.3	Sch_CN_iteratif	307
29.4	scheme_euler_explicit	310
29.5	leap_frog	311
29.6	rk3_ft	313
29.7	runge_kutta_ordre_3	315
29.8	runge_kutta_ordre_4_d3p	317
29.9	runge_kutta_rationnel_ordre_2	318
29.10	schema_adams_bashforth_order_2	320
29.11	schema_adams_bashforth_order_3	322
29.12	schema_adams_moulton_order_2	324
29.13	schema_adams_moulton_order_3	326
29.14	schema_backward_differentiation_order_2	328
29.15	schema_backward_differentiation_order_3	331
29.16	scheme_euler_implicit	333
29.17	schema_implicite_base	336
29.18	schema_phase_field	338
29.19	schema_predictor_corrector	339
29.20	schema_euler_explicite_ALE	341
30	solveur_implicite_base	343
30.1	implicit_steady	343
30.2	implicite	344
30.3	implicite_ALE	345
30.4	piso	346
30.5	simple	347
30.6	simpler	348
30.7	solveur_lineaire_std	348
30.8	solveur_u_p	349
31	source_base	350
31.1	DP_Impose	350
31.2	Source_Constituant_Vortex	350
31.3	Source_Transport_K_Eps_anisotherme	351
31.4	acceleration	351
31.5	boussinesq_concentration	352
31.6	boussinesq_temperature	352
31.7	canal_perio	353
31.8	coriolis	353
31.9	darcy	354
31.10	dirac	354
31.11	forchheimer	354
31.12	perte_charge_anisotrope	354
31.13	perte_charge_circulaire	355
31.14	perte_charge_directionnelle	355
31.15	perte_charge_isotrope	356
31.16	perte_charge_reguliere	356
31.17	spec_pdc_base	356
31.17.1	longitudinale	357
31.17.2	transversale	357
31.18	perte_charge_singuliere	357
31.19	puissance_thermique	358

31.20	radioactive_decay	358
31.21	source_con_phase_field	359
31.22	bloc_kappa_variable	360
31.23	bloc_potentiel_chim	360
31.24	source_constituant	360
31.25	flottabilite	360
31.26	source_generique	361
31.27	masse_ajoutee	361
31.28	source_pdf	361
31.29	bloc_pdf_model	361
31.29.1	troismots	362
31.30	source_pdf_base	362
31.31	source_qdm	363
31.32	source_qdm_lambdaup	363
31.33	source_qdm_phase_field	363
31.34	source_rayo_semi_transp	364
31.35	source_robin	364
31.36	source_robin_scalaire	364
31.37	listdeuxmots_sacc	364
31.38	source_th_tdivu	365
31.39	trainee	365
31.40	source_transport_k_eps	365
31.41	source_transport_k_eps_aniso_concen	365
31.42	source_transport_k_eps_aniso_therm_concen	366
31.43	tenseur_Reynolds_externes	366
31.44	terme_puissance_thermique_echange_impose	366
32	sous_zone	367
32.1	bloc_origine_cotes	368
32.2	bloc_couronne	368
32.3	bloc_tube	368
33	turbulence_paro_base	369
33.1	loi_ciofalo_hydr	369
33.2	loi_expert_hydr	369
33.3	loi_puissance_hydr	369
33.4	loi_standard_hydr	370
33.5	loi_standard_hydr_old	370
33.6	loi_ww_hydr	370
33.7	negligeable	370
33.8	paroi_tble	370
33.9	twofloat	371
33.10	liste_sonde_tble	371
33.10.1	sonde_tble	372
33.11	entierfloat	372
33.12	utau_imp	372
34	turbulence_paro_scalaire_base	373
34.1	loi_WW_scalaire	373
34.2	loi_analytique_scalaire	373
34.3	loi_expert_scalaire	373
34.4	loi_odvm	373
34.5	loi_paro_nu_impose	374
34.6	loi_standard_hydr_scalaire	374

34.7	negligeable_scalaire	375
34.8	paroi_tble_scal	375
34.9	fourfloat	375
35	listobj_impl	376
35.1	list_un_pb	376
35.2	un_pb	376
35.3	listobj	376
36	objet_lecture	376
37	index	377

1 Syntax to define a mathematical function

In a mathematical function, used for example in field definition, it's possible to use the predefined function (an object parser is used to evaluate the functions) :

ABS : absolute value function
 COS : cosine function
 SIN : sine function
 TAN : tangent function
 ATAN : arctangent function
 EXP : exponential function
 LN : natural logarithm function
 SQRT : square root function
 INT : integer function
 ERF : error function
 RND(x) : random function (values between 0 and x)
 COSH : hyperbolic cosine function
 SINH : hyperbolic sine function
 TANH : hyperbolic tangent function
 ACOS : inverse cosine function
 ASIN : inverse sine function
 ATANH : inverse hyperbolic tangent function
 NOT(x) : NOT x (returns 1 if x is false, 0 otherwise)
 SGN(x) : SGN x (returns 1 if x is positive, -1 if negative, 0 if zero)
 x_AND_y : boolean logical operation AND (returns 1 if both x and y are true, else 0)
 x_OR_y : boolean logical operation OR (returns 1 if x or y is true, else 0)
 x_GT_y : greater than (returns 1 if x>y, else 0)
 x_GE_y : greater than or equal to (returns 1 if x>=y, else 0)
 x_LT_y : less than (returns 1 if x<y, else 0)
 x_LE_y : less than or equal to (returns 1 if x<=y, else 0)
 x_MIN_y : returns the smallest of x and y
 x_MAX_y : returns the largest of x and y
 x_MOD_y : modular division of x per y
 x_EQ_y : equal to (returns 1 if x==y, else 0)
 x_NEQ_y : not equal to (returns 1 if x!=y, else 0)

You can also use the following operations:

+ : addition
 - : subtraction
 / : division
 * : multiplication

% : modulo
\$: max
^ : power
< : less than
> : greater than
[: less than or equal to
] : greater than or equal to

You can also use the following constants:

Pi : pi value (3,1415...)

The variables which can be used are:

x,y,z : coordinates

t : time

Examples:

Champ_front_fonc_txyz 2 cos(y+x^2) t+ln(y)

Champ_fonc_xyz dom 2 tanh(4*y)*(0.95+0.1*rnd(1)) 0.

Possible errors:

Error 1:

Champ_fonc_txyz 1 cos(10*t)*(1<x<2)*(1<y<2)

Previous line is wrong. It should be written as:

Champ_fonc_txyz 1 cos(10*t)*(1<x)*(x<2)*(1<y)*(y<2)

Error 2:

Champ_front_fonc_xyz 1 20*(x<-2)+10*(y]-5)+3*(z>0)

Previous line is wrong because negative values are not written between parentheses. It should be written as:

Champ_front_fonc_xyz 1 20*(x<(-2))+10*(y](-5))+3*(z>0)

2 Existing & predefined fields names

Here is a list of post-processable fields, but it is not the only ones.

Physical values	Keyword for field_name	Unit
Velocity	Vitesse or Velocity	$m.s^{-1}$
Velocity residual	Vitesse_residu	$m.s^{-2}$
Kinetic energy per elements ($0.5\rho u_i ^2$)	Energie_cinetique_elem	$kg.m^{-1}.s^{-2}$
Total kinetic energy ($\frac{\sum_{i=1}^{nb_elem} 0.5\rho u_i ^2 vol_i}{\sum_{i=1}^{nb_elem} vol_i}$)	Energie_cinetique_totale	$kg.m^{-1}.s^{-2}$
Vorticity	Vorticite	s^{-1}
Pressure in incompressible flow ($P/\rho + gz$) For Front Tracking probleme ($P + \rho gz$)	Pression ¹	$Pa.m^3.kg^{-1}$ or Pa
... continued on next page ...		

¹The post-processed pressure is the pressure divided by the fluid's density ($P/\rho + gz$) on incompressible laminar calculation. For turbulent, pressure is $P/\rho + gz + 2/3 * k$ cause the turbulent kinetic energy is in the pressure gradient.

Physical values	Keyword for field_name	Unit
Pressure in incompressible flow ($P + \rho g z$)	Pression_pa or Pressure	Pa
Pressure in compressible flow	Pression	Pa
Hydrostatic pressure ($\rho g z$)	Pression_hydrostatique	Pa
Totale pressure (when quasi compressible model is used)= $P_{th} + P$	Pression_tot	Pa
Pressure gradient ($\nabla(P/\rho + g z)$)	Gradient_pression	$m.s^{-2}$
Velocity gradient	gradient_vitesse	s^{-1}
Temperature	Temperature	$^{\circ}C$ or K
Temperature residual	Temperature_residu	$^{\circ}C.s^{-1}$ or $K.s^{-1}$
Phase temperature of a two phases flow	Temperature_EquationName	$^{\circ}C$ or K
Mass transfer rate between two phases	Temperature_mpoint	$kg.m^{-2}.s^{-1}$
Temperature variance	Variance_Temperature	K^2
Temperature dissipation rate	Taux_Dissipation_Temperature	$K^2.s^{-1}$
Temperature gradient	Gradient_temperature	$K.m^{-1}$
Heat exchange coefficient	H_echange_Tref²	$W.m^{-2}.K^{-1}$
Turbulent heat flux	Flux_Chaleur_Turbulente	$m.K.s^{-1}$
Turbulent viscosity	Viscosite_turbulente	$m^2.s^{-1}$
Turbulent dynamic viscosity (when quasi compressible model is used)	Viscosite_dynamique_turbulente	$kg.m.s^{-1}$
Turbulent kinetic energy	K	$m^2.s^{-2}$
Turbulent dissipation rate	Eps	$m^3.s^{-1}$
Turbulent quantities K and Epsilon	K_Eps	$(m^2.s^{-2}, m^3.s^{-1})$
Residuals of turbulent quantities K and Epsilon residuals	K_Eps_residu	$(m^2.s^{-3}, m^3.s^{-2})$
Constituent concentration	Concentration	
Constituent concentration residual	Concentration_residu	
Component velocity along X	VitesseX	$m.s^{-1}$
Component velocity along Y	VitesseY	$m.s^{-1}$
Component velocity along Z	VitesseZ	$m.s^{-1}$
Mass balance on each cell	Divergence_U	$m^3.s^{-1}$
Irradiancy	Irradiance	$W.m^{-2}$
Q-criteria	Critere_Q	s^{-1}
Distance to the wall $Y^+ = yU/\nu$ (only computed on boundaries of wall type)	Y_plus	dimensionless
Friction velocity	U_star	$m.s^{-1}$
Cell volumes	Volume_maille	m^3
Chemical potential	Potentiel_Chimique_Generalise	
Source term in non Galilean referential	Acceleration_terme_source	$m.s^{-2}$
Stability time steps	Pas_de_temps	S
... continued on next page ...		

²Tref indicates the value of a reference temperature and must be specified by the user. For example, H_echange_293 is the keyword to use for Tref=293K.

Physical values	Keyword for field_name	Unit
Listing of boundary fluxes	Flux_bords	cf each *.out file
Volumetric porosity	Porosite_volumique	dimensionless
Distance to the wall	Distance_Paroi ³	<i>m</i>
Volumic thermal power	Puissance_volumique	<i>W.m</i> ⁻³
Local shear strain rate defined as $\sqrt{(2S_{ij}S_{ij})}$	Taux_cisaillement	<i>s</i> ⁻¹
Cell Courant number (VDF only)	Courant_maille	dimensionless
Cell Reynolds number (VDF only)	Reynolds_maille	dimensionless
Viscous force	viscous_force	<i>kg.m</i> ² . <i>s</i> ⁻¹
Pressure force	pressure_force	<i>kg.m</i> ² . <i>s</i> ⁻¹
Total force	total_force	<i>kg.m</i> ² . <i>s</i> ⁻¹
Viscous force along X	viscous_force_x	<i>kg.m</i> ² . <i>s</i> ⁻¹
Viscous force along Y	viscous_force_y	<i>kg.m</i> ² . <i>s</i> ⁻¹
Viscous force along Z	viscous_force_z	<i>kg.m</i> ² . <i>s</i> ⁻¹
Pressure force along X	pressure_force_x	<i>kg.m</i> ² . <i>s</i> ⁻¹
Pressure force along Y	pressure_force_y	<i>kg.m</i> ² . <i>s</i> ⁻¹
Pressure force along Z	pressure_force_z	<i>kg.m</i> ² . <i>s</i> ⁻¹
Total force along X	total_force_x	<i>kg.m</i> ² . <i>s</i> ⁻¹
Total force along Y	total_force_y	<i>kg.m</i> ² . <i>s</i> ⁻¹
Total force along Z	total_force_z	<i>kg.m</i> ² . <i>s</i> ⁻¹

3 interprete

Description: Basic class for interpreting a data file. Interpreters allow some operations to be carried out on objects.

See also: objet_u (3.7) read (3.77) associate (3.11) discretize (3.29) mailler (3.58) maillerparallel (3.60) ecrire_fichier_bin (3.117) ecrire (3.116) read_file (3.78) lire_tgrid (3.80) solve (3.95) execute_parallel (3.34) end (3.47) dimension (3.26) bidim_axi (3.16) axi (3.15) transformer (3.107) rotation (3.92) dilate (3.25) testeur (3.100) test_solveur (3.99) postraiter_domaine (3.73) modif_bord_to_raccord (3.61) remove_elem (3.86) regroupebord (3.85) supprimer_bord (3.96) calculer_moments (3.17) imprimer_flux (3.50) decouper_bord_coincident (3.24) raffiner_anisotrope (3.75) raffiner_isotrope (3.76) trianguler (3.108) tetraedriser (3.102) orientefacesbord (3.65) reorienter_tetraedres (3.89) reorienter_triangles (3.90) verifiercoin (3.114) porosites (3.70) porosites_champ (3.72) discretiser_domaine (3.28) { (3.22) } (3.48) export (3.35) debog (3.21) pilote_icoco (3.68) moyenne_volumique (3.62) lire_ideas (3.57) system (3.98) redresser_hexaedres_vdf (3.83) analyse_angle (3.10) remove_invalid_internal_boundaries (3.88) reordonner (3.91) precision-geom (3.74) nettoiepasnoeuds (3.63) scatter (3.93) distance_parois (3.30) extruder (3.43) extract_2d_from_3d (3.36) extruder_en20 (3.45) extrudeparois (3.42) decoupebord (3.23) extraire_plan (3.39) extraire-domaine (3.38) extraire_surface (3.40) integrer_champ_med (3.52) orienter_simplexes (3.82) verifier-simplexes (3.113) verifier_qualite_raffinements (3.111) testeur_medcoupling (3.101) option_vdf (3.64) Op_Conv_EF_Stab_CoviMAC_Face (3.3) interprete_geometrique_base (3.53) extrudebord (3.41) corriger-frontiere_periodique (3.19) polyedriser (3.69) Raffiner_isotrope_parallele (3.5) refine_mesh (3.84) partition (3.66) disable_TU (3.27) MultipleFiles (3.2) ecriturelecturespecial (3.33) read_med (3.6) Merge_MED (3.1) ecrire_med (3.118) lata_to_other (3.56) lata_to_med (3.54) ecrire_champ_med (3.31) Op_Conv_EF_Stab_PolyMAC_Face (3.4) Solver_moving_mesh_ALE (3.8) imposer_vit_bords_ale (3.49)

Usage:

interprete

³distance_parois is a field which can be used only if the mixing length model (see 2.15.1.2) is used in the data file.

3.1 Merge_MED

Description: This keyword allows to merge multiple MED files produced during a parallel computation into a single MED file.

See also: [interpret \(3\)](#)

Usage:

Merge_MED *med_files_base_name* *time_iterations*

where

- **med_files_base_name** *str*: Base name of multiple med files that should appear as *base_name-xxxxx.med*, where *xxxxx* denotes the MPI rank number. If you specify *NOM_DU_CAS*, it will automatically take the basename from your datafile's name.
- **time_iterations** *str* into [*all_times*, *last_time*]: Identifies whether to merge all time iterations present in the MED files or only the last one.

3.2 MultipleFiles

Description: Change MPI rank limit for multiple files during I/O

See also: [interpret \(3\)](#)

Usage:

MultipleFiles *type*

where

- **type** *int*: New MPI rank limit

3.3 Op_Conv_EF_Stab_CoviMAC_Face

Description: Class *Op_Conv_EF_Stab_CoviMAC_Face_CoviMAC*

See also: [interpret \(3\)](#)

Usage:

Op_Conv_EF_Stab_CoviMAC_Face {

 [**alpha** *float*]

}

where

- **alpha** *float*: parametre ajustant la stabilisation de 0 (schema centre) a 1 (schema montant)

3.4 Op_Conv_EF_Stab_PolyMAC_Face

Description: Class *Op_Conv_EF_Stab_PolyMAC_Face_PolyMAC*

See also: [interpret \(3\)](#)

Usage:

Op_Conv_EF_Stab_PolyMAC_Face {

```

    [ alpha float ]
}
where

```

- **alpha** *float*: parametre ajustant la stabilisation de 0 (schema centre) a 1 (schema amont)

3.5 Raffiner_isotrope_parallele

Description: Refine parallel mesh in parallel

See also: [interpret \(3\)](#)

Usage:

```
Raffiner_isotrope_parallele {
```

```

    name_of_initial_zones str
    name_of_new_zones str
    [ ascii ]
    [ single_hdf ]

```

```

}
where

```

- **name_of_initial_zones** *str*: name of initial Zones
- **name_of_new_zones** *str*: name of new Zones
- **ascii** : writing Zones in ascii format
- **single_hdf** : writing Zones in hdf format

3.6 read_med

Synonymous: **lire_med**

Description: Keyword to read MED mesh files where domain_name corresponds to the domain name, filename.med corresponds to the file (written in format MED) containing the mesh named mesh_name.

Note about naming boundaries: When reading filename.med, TRUST will detect boundaries between domain (Raccord) when the name of the boundary begins by type_raccord_. For example, a boundary named type_raccord_wall in filename.med will be considered by TRUST as a boundary named wall between two domains.

NB: To read several domains from a mesh issued from a MED file, use Read_Med to read the mesh then use Create_domain_from_sous_zone keyword.

NB: If the MED file contains one or several subzone defined as a group of volumes, then Read_MED will read it and will create two files domain_name_ssz.geo and domain_name_ssz_par.geo defining the sub-zones for sequential and/or parallel calculations. These subzones will be read in sequential in the datafile by including (after Read_Med keyword) something like:

```
Read_Med ....
```

```
Read_file domain_name_ssz.geo ;
```

During the parallel calculation, you will include something:

```
Scatter { ... }
```

```
Read_file domain_name_ssz_par.geo ;
```

See also: [interpret \(3\)](#) [lire_medfile \(3.7\)](#)

Usage:

read_med [**vef**] [**convertAllToPoly**] [**family_names_from_group_names**] [**short_family_names**]
nom_dom nom_dom_med file

where

- **vef** *str* into [*'vef'*]: Option vef is obsolete and is kept for backward compatibility.
- **convertAllToPoly** *str* into [*'convertAllToPoly'*]: Option to convert mesh with mixed cells into polyhedras/polygons cells
- **family_names_from_group_names** *str* into [*'family_names_from_group_names'*]: The option family_names_from_group_names uses the group names instead of the family names to detect the boundaries into a MED mesh (useful when trying to read a MED mesh file from Gmsh tool which can now read and write MED meshes).
- **short_family_names** *str* into [*'short_family_names'*]: The option short_family_names is useful to suppress FAM_-*_ from the boundary names of the MED meshes.
- **nom_dom** *str*: corresponds to the domain name
- **nom_dom_med** *str*: name of the mesh in med file
- **file** *str*: corresponds to the file (written in format MED) containing the mesh

3.7 lire_medfile

Description: Obsolete keyword to read a mesh with MED file API

See also: read_med (3.6)

Usage:

lire_medfile [**vef**] [**convertAllToPoly**] [**family_names_from_group_names**] [**short_family_names**]
nom_dom nom_dom_med file

where

- **vef** *str* into [*'vef'*]: Option vef is obsolete and is kept for backward compatibility.
- **convertAllToPoly** *str* into [*'convertAllToPoly'*]: Option to convert mesh with mixed cells into polyhedras/polygons cells
- **family_names_from_group_names** *str* into [*'family_names_from_group_names'*]: The option family_names_from_group_names uses the group names instead of the family names to detect the boundaries into a MED mesh (useful when trying to read a MED mesh file from Gmsh tool which can now read and write MED meshes).
- **short_family_names** *str* into [*'short_family_names'*]: The option short_family_names is useful to suppress FAM_-*_ from the boundary names of the MED meshes.
- **nom_dom** *str*: corresponds to the domain name
- **nom_dom_med** *str*: name of the mesh in med file
- **file** *str*: corresponds to the file (written in format MED) containing the mesh

3.8 Solver_moving_mesh_ALE

Description: Solver used to solve the system giving the mesh velocity for the ALE (Arbitrary Lagrangian-Eulerian) framework.

See also: interpret (3)

Usage:

Solver_moving_mesh_ALE dom bloc

where

- **dom** *str*: Name of domain.
- **bloc** *bloc_lecture* (3.9): Example: { PETSC GCP { precondition ssor { omega 1.5 } seuil 1e-7 impr } }

3.9 bloc_lecture

Description: to read between two braces

See also: [objet_lecture \(36\)](#)

Usage:

bloc_lecture

where

- **bloc_lecture** *str*

3.10 analyse_angle

Description: Keyword Analyse_angle prints the histogram of the largest angle of each mesh elements of the domain named name_domain. nb_histo is the histogram number of bins. It is called by default during the domain discretization with nb_histo set to 18. Useful to check the number of elements with angles above 90 degrees.

See also: [interpret \(3\)](#)

Usage:

analyse_angle domain_name nb_histo

where

- **domain_name** *str*: Name of domain to resequence.
- **nb_histo** *int*

3.11 associate

Synonymous: **associer**

Description: This interpreter allows one object to be associated with another. The order of the two objects in this instruction is not important. The object objet_2 is associated to objet_1 if this makes sense; if not either objet_1 is associated to objet_2 or the program exits with error because it cannot execute the Associate (Associer) instruction. For example, to calculate water flow in a pipe, a Pb_Hydraulique type object needs to be defined. But also a Domaine type object to represent the pipe, a Scheme_euler_explicit type object for time discretization, a discretization type object (VDF or VEF) and a Fluide_Incompressible type object which will contain the water properties. These objects must then all be associated with the problem.

See also: [interpret \(3\)](#) [associer_pbmng_pbgglobal \(3.14\)](#) [associer_pbmng_pbfin \(3.13\)](#) [associer_algo \(3.12\)](#)

Usage:

associate objet_1 objet_2

where

- **objet_1** *str*: Objet_1
- **objet_2** *str*: Objet_2

3.12 associer_algo

Description: This interpreter allows an algorithm to be associated with multi-grid problem.

See also: [associate \(3.11\)](#)

Usage:

associer_algo objet_1 objet_2

where

- **objet_1** *str*: Objet_1
- **objet_2** *str*: Objet_2

3.13 associer_pbmng_pbfin

Description: This interpreter allows a local problem to be associated with multi-grid problem.

See also: [associate \(3.11\)](#)

Usage:

associer_pbmng_pbfin objet_1 objet_2

where

- **objet_1** *str*: Objet_1
- **objet_2** *str*: Objet_2

3.14 associer_pbmng_pbgglobal

Description: This interpreter allows a global problem to be associated with multi-grid problem.

See also: [associate \(3.11\)](#)

Usage:

associer_pbmng_pbgglobal objet_1 objet_2

where

- **objet_1** *str*: Objet_1
- **objet_2** *str*: Objet_2

3.15 axi

Description: This keyword allows a 3D calculation to be executed using cylindrical coordinates (R, θ, Z). If this instruction is not included, calculations are carried out using Cartesian coordinates.

See also: [interprete \(3\)](#)

Usage:

axi

3.16 **bidim_axi**

Description: Keyword allowing a 2D calculation to be executed using axisymmetric coordinates (R, Z). If this instruction is not included, calculations are carried out using Cartesian coordinates.

See also: [interpret \(3\)](#)

Usage:

bidim_axi

3.17 **calculer_moments**

Description: Calculates and prints the torque (moment of force) exerted by the fluid on each boundary in output files (.out) of the domain `nom_dom`.

See also: [interpret \(3\)](#)

Usage:

calculer_moments nom_dom mot

where

- **nom_dom** *str*: Name of domain.
- **mot** *lecture_bloc_moment_base* ([3.18](#)): Keyword.

3.18 **lecture_bloc_moment_base**

Description: Auxiliary class to compute and print the moments.

See also: [objet_lecture \(36\)](#) [calcul \(3.18.1\)](#) [centre_de_gravite \(3.18.2\)](#)

Usage:

3.18.1 **calcul**

Description: The centre of gravity will be calculated.

See also: ([3.18](#))

Usage:

calcul

3.18.2 **centre_de_gravite**

Description: To specify the centre of gravity.

See also: ([3.18](#))

Usage:

centre_de_gravite point

where

- **point** *un_point* ([3.18.3](#)): A centre of gravity.

3.18.3 un_point

Description: A point.

See also: `objet_lecture` (36)

Usage:

pos

where

- **pos** *x1 x2 (x3)*: Point coordinates.

3.19 corriger_frontiere_periodique

Description: The `Corriger_frontiere_periodique` keyword is mandatory to first define the periodic boundaries, to reorder the faces and eventually fix unaligned nodes of these boundaries. Faces on one side of the periodic domain are put first, then the faces on the opposite side, in the same order. It must be run in sequential before mesh splitting.

See also: `interpret` (3)

Usage:

corriger_frontiere_periodique {

domaine *str*

bord *str*

 [**direction** *n x1 x2 ... xn*]

 [**fichier_post** *str*]

}

where

- **domaine** *str*: Name of domain.
- **bord** *str*: the name of the boundary (which must contain two opposite sides of the domain)
- **direction** *n x1 x2 ... xn*: defines the periodicity direction vector (a vector that points from one node on one side to the opposite node on the other side). This vector must be given if the automatic algorithm fails, that is:
 - when the node coordinates are not perfectly periodic
 - when the periodic direction is not aligned with the normal vector of the boundary faces
- **fichier_post** *str*: .

3.20 create_domain_from_sous_zone

Description: This keyword fills the domain `domaine_final` with the subzone `par_sous_zone` from the domain `domaine_init`. It is very useful when meshing several mediums with Gmsh. Each medium will be defined as a subzone into Gmsh. A MED mesh file will be saved from Gmsh and read with `Lire_Med` keyword by the TRUST data file. And with this keyword, a domain will be created for each medium in the TRUST data file.

See also: `interpret_geometrique_base` (3.53)

Usage:

create_domain_from_sous_zone {

domaine_final *str*

```

    par_sous_zone  str
    domaine_init  str
}

```

where

- **domaine_final** *str*: new domain in which faces are stored
- **par_sous_zone** *str*: a sub-area allowing to choose the elements
- **domaine_init** *str*: initial domain

3.21 debog

Description: Class to debug some differences between two TRUST versions on a same data file.

If you want to compare the results of the same code in sequential and parallel calculation, first run (mode=0) in sequential mode (the files fichier1 and fichier2 will be written first) then the second run in parallel calculation (mode=1).

During the first run (mode=0), it prints into the file DEBOG, values at different points of the code thanks to the C++ instruction call. see for example in Noyau/Resoudre.cpp file the instruction: `Debog::verifier(msg,value);` Where msg is a string and value may be a double, an integer or an array.

During the second run (mode=1), it prints into a file Err_Debog.dbg the same messages than in the DEBOG file and checks if the differences between results from both codes are less than a given value (error). If not, it prints Ok else show the differences and the lines where it occurred.

See also: [interprete \(3\)](#)

Usage:

```

debog pb fichier1 fichier2 seuil mode
where

```

- **pb** *str*: Name of the problem to debug.
- **fichier1** *str*: Name of the file where domain will be written in sequential calculation.
- **fichier2** *str*: Name of the file where faces will be written in sequential calculation.
- **seuil** *float*: Minimal value (by default 1.e-20) for the differences between the two codes.
- **mode** *int*: By default -1 (nothing is written in the different files), you will set 0 for the sequential run, and 1 for the parallel run.

3.22 {

Description: Block's beginning.

See also: [interprete \(3\)](#)

Usage:

```

{

```

3.23 decoupebord

Synonymous: **decoupebord_pour_rayonnement**

Description: To subdivide the external boundary of a domain into several parts (may be useful for better accuracy when using radiation model in transparent medium). To specify the boundaries of the fine_domain_name domain to be splitted. These boundaries will be cut according the coarse mesh defined by either the keyword domaine_grossier (each boundary face of the coarse mesh coarse_domain_name will

be used to group boundary faces of the fine mesh to define a new boundary), either by the keyword `nb_parts_naif` (each boundary of the fine mesh is splitted into a partition with $n_x * n_y * n_z$ elements), either by a geometric condition given by a formulae with the keyword `condition_geometrique`. If used, the coarse_domain_name domain should have the same boundaries name of the fine_domain_name domain. A mesh file (ASCII format, except if binaire option is specified) named by default `newgeom` (or specified by the `nom_fichier_sortie` keyword) will be created and will contain the fine_domain_name domain with the splitted boundaries named `boundary_name`

See also: [interprete \(3\)](#)

Usage:

```
decoupebord {
    domaine str
    [ domaine_grossier str]
    [ nb_parts_naif n n1 n2 ... nn]
    [ nb_parts_geom n n1 n2 ... nn]
    bords_a_decouper n word1 word2 ... wordn
    [ nom_fichier_sortie str]
    [ condition_geometrique n word1 word2 ... wordn]
    [ binaire int]
}
```

where

- **domaine** *str*
- **domaine_grossier** *str*
- **nb_parts_naif** *n n1 n2 ... nn*
- **nb_parts_geom** *n n1 n2 ... nn*
- **bords_a_decouper** *n word1 word2 ... wordn*
- **nom_fichier_sortie** *str*
- **condition_geometrique** *n word1 word2 ... wordn*
- **binaire** *int*

3.24 decouper_bord_coincident

Description: In case of non-coincident meshes and a `paroi_contact` condition, run is stopped and two external files are automatically generated in VEF (`connectivity_failed_boundary_name` and `connectivity_failed_pb_name.med`). In 2D, the keyword `Decouper_bord_coincident` associated to the `connectivity_failed_boundary_name` file allows to generate a new coincident mesh.

See also: [interprete \(3\)](#)

Usage:

```
decouper_bord_coincident domain_name bord
```

where

- **domain_name** *str*: Name of domain.
- **bord** *str*: `connectivity_failed_boundary_name`

3.25 dilate

Description: Keyword to multiply the whole coordinates of the geometry.

See also: [interpret](#) (3)

Usage:

dilate **domain_name** **alpha**

where

- **domain_name** *str*: Name of domain.
- **alpha** *float*: Value of dilatation coefficient.

3.26 dimension

Description: Keyword allowing calculation dimensions to be set (2D or 3D), where dim is an integer set to 2 or 3. This instruction is mandatory.

See also: [interpret](#) (3)

Usage:

dimension **dim**

where

- **dim** *int into [2, 3]*: Number of dimensions.

3.27 disable_TU

Description: Flag to disable the writing of the .TU files

See also: [interpret](#) (3)

Usage:

disable_TU

3.28 discretiser_domaine

Description: Useful to discretize the domain **domain_name** (faces will be created) without defining a problem.

See also: [interpret](#) (3)

Usage:

discretiser_domaine **domain_name**

where

- **domain_name** *str*: Name of the domain.

3.29 discretize

Synonymous: **discretiser**

Description: Keyword to discretise a problem **problem_name** according to the discretization **dis**.

IMPORTANT: A number of objects must be already associated (a domain, time scheme, central object) prior to invoking the Discretize (Discretiser) keyword. The physical properties of this central object must also have been read.

See also: [interpret \(3\)](#)

Usage:

discretize problem_name dis

where

- **problem_name** *str*: Name of problem.
- **dis** *str*: Name of the discretization object.

3.30 distance_pari

Description: Class to generate external file Wall_length.xyz devoted for instance, for mixing length modelling. In this file, are saved the coordinates of each element (center of gravity) of dom domain and minimum distance between this point and boundaries (specified bords) that user specifies in data file (typically, those associated to walls). A field Distance_pari is available to post process the distance to the wall.

See also: [interpret \(3\)](#)

Usage:

distance_pari dom bords format

where

- **dom** *str*: Name of domain.
- **bords** *n word1 word2 ... wordn*: Boundaries.
- **format** *str* into [*'binaire'*, *'formatte'*]: Value for format may be binaire (a binary file Wall_length.xyz is written) or formatte (moreover, a formatted file Wall_length_formatted.xyz is written).

3.31 ecrire_champ_med

Description: Keyword to write a field to MED format into a file. Useful with Homard.

See also: [interpret \(3\)](#)

Usage:

ecrire_champ_med nom_dom nom_chp file

where

- **nom_dom** *str*: domain name
- **nom_chp** *str*: field name
- **file** *str*: file name

3.32 ecrire_fichier_formatte

Description: Keyword to write the object of name name_obj to a file filename in ASCII format.

See also: [ecrire_fichier_bin \(3.117\)](#)

Usage:

ecrire_fichier_formatte name_obj filename

where

- **name_obj** *str*: Name of the object to be written.
- **filename** *str*: Name of the file.

3.33 **ecriturelecturespecial**

Description: Class to write or not to write a .xyz file on the disk at the end of the calculation.

See also: [interpret \(3\)](#)

Usage:

ecriturelecturespecial **type**

where

- **type** *str*: If set to 0, no xyz file is created. If set to EFichierBin, it uses prior 1.7.0 way of reading xyz files (now LecFicDiffuseBin). If set to EcrFicPartageBin, it uses prior 1.7.0 way of writing xyz files (now EcrFicPartageMPIIO).

3.34 **execute_parallel**

Description: This keyword allows to run several computations in parallel on processors allocated to TRUST. The set of processors is split in N subsets and each subset will read and execute a different data file. Error messages usually written to stderr and stdout are redirected to .log files (journaling must be activated).

See also: [interpret \(3\)](#)

Usage:

execute_parallel {

liste_cas *n word1 word2 ... wordn*
[**nb_procs** *n n1 n2 ... nn*]

}

where

- **liste_cas** *n word1 word2 ... wordn*: N datafile1 ... datafileN. datafileX the name of a TRUST data file without the .data extension.
- **nb_procs** *n n1 n2 ... nn*: nb_procs is the number of processors needed to run each data file. If not given, TRUST assumes that computations are sequential.

3.35 **export**

Description: Class to make the object have a global range, if not its range will apply to the block only (the associated object will be destroyed on exiting the block).

See also: [interpret \(3\)](#)

Usage:

export

3.36 **extract_2d_from_3d**

Description: Keyword to extract a 2D mesh by selecting a boundary of the 3D mesh. To generate a 2D axisymmetric mesh prefer Extract_2Daxi_from_3D keyword.

See also: [interpret \(3\)](#) [extract_2daxi_from_3d \(3.37\)](#)

Usage:

extract_2d_from_3d dom3D bord dom2D

where

- **dom3D** *str*: Domain name of the 3D mesh
- **bord** *str*: Boundary name. This boundary becomes the new 2D mesh and all the boundaries, in 3D, attached to the selected boundary, give their name to the new boundaries, in 2D.
- **dom2D** *str*: Domain name of the new 2D mesh

3.37 extract_2daxi_from_3d

Description: Keyword to extract a 2D axisymetric mesh by selecting a boundary of the 3D mesh.

See also: `extract_2d_from_3d` ([3.36](#))

Usage:

extract_2daxi_from_3d dom3D bord dom2D

where

- **dom3D** *str*: Domain name of the 3D mesh
- **bord** *str*: Boundary name. This boundary becomes the new 2D mesh and all the boundaries, in 3D, attached to the selected boundary, give their name to the new boundaries, in 2D.
- **dom2D** *str*: Domain name of the new 2D mesh

3.38 extraire_domaine

Description: Keyword to create a new domain built with the domain elements of the pb_name problem verifying the two conditions given by Condition_elements. The problem pb_name should have been discretized.

Keyword Discretize should have already been used to read the object.

See also: `interprete` ([3](#))

Usage:

extraire_domaine {

domaine *str*
probleme *str*
[**condition_elements** *str*]
[**sous_zone** *str*]

}

where

- **domaine** *str*: Domain in which faces are saved
- **probleme** *str*: Problem from which faces should be extracted
- **condition_elements** *str*
- **sous_zone** *str*

3.39 extraire_plan

Description: This keyword extracts a plane mesh named `domain_name` (this domain should have been declared before) from the mesh of the `pb_name` problem. The plane can be either a triangle (defined by the keywords `Origine`, `Point1`, `Point2` and `Triangle`), either a regular quadrangle (with keywords `Origine`, `Point1` and `Point2`), or either a generalized quadrangle (with keywords `Origine`, `Point1`, `Point2`, `Point3`). The keyword `Epaisseur` specifies the thickness of volume around the plane which contains the faces of the extracted mesh. The keyword `via_extraire_surface` will create a plan and use `Extraire_surface` algorithm. `Inverse_condition_element` keyword then will be used in the case where the plane is a boundary not well oriented, and `avec_certains_bords_pour_extraire_surface` is the option related to the `Extraire_surface` option named `avec_certains_bords`.

Keyword `Discretize` should have already been used to read the object.

See also: [interprete \(3\)](#)

Usage:

```
extraire_plan {  
    domaine str  
    probleme str  
    epaisseur float  
    origine n x1 x2 ... xn  
    point1 n x1 x2 ... xn  
    point2 n x1 x2 ... xn  
    [ point3 n x1 x2 ... xn]  
    [ triangle ]  
    [ via_extraire_surface ]  
    [ inverse_condition_element ]  
    [ avec_certains_bords_pour_extraire_surface n word1 word2 ... wordn ]  
}
```

where

- **domaine** *str*: `domain_name`
- **probleme** *str*: `pb_name`
- **epaisseur** *float*
- **origine** *n x1 x2 ... xn*
- **point1** *n x1 x2 ... xn*
- **point2** *n x1 x2 ... xn*
- **point3** *n x1 x2 ... xn*
- **triangle**
- **via_extraire_surface**
- **inverse_condition_element**
- **avec_certains_bords_pour_extraire_surface** *n word1 word2 ... wordn*

3.40 extraire_surface

Description: This keyword extracts a surface mesh named `domain_name` (this domain should have been declared before) from the mesh of the `pb_name` problem. The surface mesh is defined by one or two conditions. The first condition is about elements with `Condition_elements`. For example: `Condition_elements x*x+y*y+z*z<1`

Will define a surface mesh with external faces of the mesh elements inside the sphere of radius 1 located at (0,0,0). The second condition `Condition_faces` is useful to give a restriction.

By default, the faces from the boundaries are not added to the surface mesh excepted if option `avec_les_bords` is given (all the boundaries are added), or if the option `avec_certains_bords` is used to add only

some boundaries.

Keyword Discretize should have already been used to read the object.

See also: [interpret](#) (3)

Usage:

```
extraire_surface {  
    domaine str  
    probleme str  
    [ condition_elements str ]  
    [ condition_faces str ]  
    [ avec_les_bords ]  
    [ avec_certains_bords n word1 word2 ... wordn ]  
}
```

where

- **domaine** *str*: Domain in which faces are saved
- **probleme** *str*: Problem from which faces should be extracted
- **condition_elements** *str*
- **condition_faces** *str*
- **avec_les_bords**
- **avec_certains_bords** *n word1 word2 ... wordn*

3.41 extrudebord

Description: Class to generate an extruded mesh from a boundary of a tetrahedral or an hexahedral mesh.

Warning: If the initial domain is a tetrahedral mesh, the boundary will be moved in the XY plane then extrusion will be applied (you should maybe use the Transformer keyword on the final domain to have the domain you really want). You can use the keyword `Ecrire_Fichier_Meshtv` to generate a meshtv file to visualize your initial and final meshes.

This keyword can be used for example to create a periodic box extracted from a boundary of a tetrahedral or a hexahedral mesh. This periodic box may be used then to engender turbulent inlet flow condition for the main domain.

Note that `ExtrudeBord` in VEF generates 3 or 14 tetrahedra from extruded prisms.

See also: [interpret](#) (3)

Usage:

```
extrudebord {  
    domaine_init str  
    direction x1 x2 (x3)  
    nb_tranches int  
    domaine_final str  
    nom_bord str  
    [ hexa_old ]  
    [ trois_tetra ]  
    [ vingt_tetra ]  
    [ sans_passer_par_le2d int ]  
}
```

where

- **domaine_init** *str*: Initial domain with hexaedras or tetrahedras.
- **direction** *x1 x2 (x3)*: Directions for the extrusion.
- **nb_tranches** *int*: Number of elements in the extrusion direction.
- **domaine_final** *str*: Extruded domain.
- **nom_bord** *str*: Name of the boundary of the initial domain where extrusion will be applied.
- **hexa_old** : Old algorithm for boundary extrusion from a hexahedral mesh.
- **trois_tetra** : To extrude in 3 tetrahedras instead of 14 tetrahedras.
- **vingt_tetra** : To extrude in 20 tetrahedras instead of 14 tetrahedras.
- **sans_passer_par_le2d** *int*: Only for non-regression

3.42 extrudeparoi

Description: Keyword dedicated in 3D (VEF) to create prismatic layer at wall. Each prism is cut into 3 tetraedra.

See also: [interpret \(3\)](#)

Usage:

```
extrudeparoi {
    domaine str
    nom_bord str
    [ epaisseur n x1 x2 ... xn ]
    [ critere_absolu int ]
    [ projection_normale_bord ]
}
```

where

- **domaine** *str*: Name of the domain.
- **nom_bord** *str*: Name of the (no-slip) boundary for creation of prismatic layers.
- **epaisseur** *n x1 x2 ... xn*: *n* r1 r2 rn : (relative or absolute) width for each layer.
- **critere_absolu** *int*: relative (0, the default) or absolute (1) width for each layer.
- **projection_normale_bord** : keyword to project layers on the same plane that contiguous boundaries. default values are : epaisseur_relative 1 0.5 projection_normale_bord 1

3.43 extruder

Description: Class to create a 3D tetrahedral/hexahedral mesh (a prism is cut in 14) from a 2D triangular/quadrangular mesh.

See also: [interpret \(3\)](#) [extruder_en3 \(3.46\)](#)

Usage:

```
extruder {
    domaine str
    direction troisf
    nb_tranches int
}
```

where

- **domaine** *str*: Name of the domain.
- **direction** *troisf* [\(3.44\)](#): Direction of the extrude operation.
- **nb_tranches** *int*: Number of elements in the extrusion direction.

3.44 troisf

Description: Auxiliary class to extrude.

See also: `objet_lecture` (36)

Usage:

lx ly lz

where

- **lx** *float*: X direction of the extrude operation.
- **ly** *float*: Y direction of the extrude operation.
- **lz** *float*: Z direction of the extrude operation.

3.45 extruder_en20

Description: It does the same task as Extruder except that a prism is cut into 20 tetraedra instead of 3. The name of the boundaries will be *devant* (front) and *derriere* (back). But you can change these names with the keyword `RegroupeBord`.

See also: `interprete` (3)

Usage:

```
extruder_en20 {  
    domaine str  
    [ direction troisf]  
    nb_tranches int
```

```
}
```

where

- **domaine** *str*: Name of the domain.
- **direction** *troisf* (3.44): 0 Direction of the extrude operation.
- **nb_tranches** *int*: Number of elements in the extrusion direction.

3.46 extruder_en3

Description: Class to create a 3D tetrahedral/hexahedral mesh (a prism is cut in 3) from a 2D triangular/quadrangular mesh. The names of the boundaries (by default, *devant* (front) and *derriere* (back)) may be edited by the keyword `nom_cl_devant` and `nom_cl_derriere`. If `NULL` is written for `nom_cl`, then no boundary condition is generated at this place.

Recommendation : to ensure conformity between meshes (in case of fluid/solid coupling) it is recommended to extrude all the domains at the same time.

See also: `extruder` (3.43)

Usage:

```
extruder_en3 {  
    domaine n word1 word2 ... wordn  
    [ nom_cl_devant str]  
    [ nom_cl_derriere str]  
    direction troisf
```

```

    nb_tranches int
}
where

```

- **domaine** *n word1 word2 ... wordn*: List of the domains
- **nom_cl_devant** *str*: New name of the first boundary.
- **nom_cl_derriere** *str*: New name of the second boundary.
- **direction** *troisf* (3.44) for inheritance: Direction of the extrude operation.
- **nb_tranches** *int* for inheritance: Number of elements in the extrusion direction.

3.47 end

Synonymous: **fin**

Description: Keyword which must complete the data file. The execution of the data file stops when reaching this keyword.

See also: [interpret](#) (3)

Usage:
end

3.48 }

Description: Block's end.

See also: [interpret](#) (3)

Usage:
}

3.49 imposer_vit_bords_ale

Description: For the Arbitrary Lagrangian-Eulerian framework: block to indicate the number of mobile boundaries of the domain and specify the speed that must be imposed on them.

See also: [interpret](#) (3)

Usage:
imposer_vit_bords_ale dom bloc
 where

- **dom** *str*: Name of domain.
- **bloc** *bloc_lecture* (3.9): between the braces, you must specify the numbers of the mobile borders of the domain then list these mobile borders and indicate the speed which must be imposed on them
 Example: `Imposer_vit_bords_ALE dom_name { 1 boundary_name Champ_front_ALE 2 -(y-0.1)*0.01 (x-0.1)*0.01 }`

3.50 imprimer_flux

Description: This keyword prints the flux per face at the specified domain boundaries in the data set. The fluxes are written to the .face files at a frequency defined by dt_impr, the evaluation printing frequency (refer to time scheme keywords). By default, fluxes are incorporated onto the edges before being displayed.

See also: [interprete \(3\)](#) [imprimer_flux_sum \(3.51\)](#)

Usage:

imprimer_flux **domain_name** **noms_bord**

where

- **domain_name** *str*: Name of the domain.
- **noms_bord** *bloc_lecture (3.9)*: List of boundaries, for ex: { Bord1 Bord2 }

3.51 imprimer_flux_sum

Description: This keyword prints the sum of the flux per face at the domain boundaries defined by the user in the data set. The fluxes are written into the .out files at a frequency defined by dt_impr, the evaluation printing frequency (refer to time scheme keywords).

See also: [imprimer_flux \(3.50\)](#)

Usage:

imprimer_flux_sum **domain_name** **noms_bord**

where

- **domain_name** *str*: Name of the domain.
- **noms_bord** *bloc_lecture (3.9)*: List of boundaries, for ex: { Bord1 Bord2 }

3.52 integrer_champ_med

Description: This keyword is used to calculate a flow rate from a velocity MED field read before. The method is either debit_total to calculate the flow rate on the whole surface, either integrale_en_z to calculate flow rates between $z=z_{min}$ and $z=z_{max}$ on nb_tranche surfaces. The output file indicates first the flow rate for the whole surface and then lists for each tranche : the height z, the surface average value, the surface area and the flow rate. For the debit_total method, only one tranche is considered.

file :z Sum(u.dS)/Sum(dS) Sum(dS) Sum(u.dS)

See also: [interprete \(3\)](#)

Usage:

integrer_champ_med {

champ_med *str*
methode *str* into ['integrale_en_z', 'debit_total']
[**zmin** *float*]
[**zmax** *float*]
[**nb_tranche** *int*]
[**fichier_sortie** *str*]

}

where

- **champ_med** *str*
- **methode** *str* into ['integrale_en_z', 'debit_total']: to choose between the integral following z or over the entire height (debit_total corresponds to zmin=-DMAXFLOAT, ZMax=DMAXFLOAT, nb_tranche=1)
- **zmin** *float*
- **zmax** *float*
- **nb_tranche** *int*
- **fichier_sortie** *str*: name of the output file, by default: integrale.

3.53 interprete_geometrique_base

Description: Class for interpreting a data file

See also: [interprete \(3\)](#) [create_domain_from_sous_zone \(3.20\)](#)

Usage:

interprete_geometrique_base

3.54 lata_to_med

Description: To convert results file written with LATA format to MED file. Warning: Fields located on faces are not supported yet.

See also: [interprete \(3\)](#)

Usage:

lata_to_med [format] file file_med

where

- **format** *format_lata_to_med (3.55)*: generated file post_med.data use format (MED or LATA or LML keyword).
- **file** *str*: LATA file to convert to the new format.
- **file_med** *str*: Name of the MED file.

3.55 format_lata_to_med

Description: not_set

See also: [objet_lecture \(36\)](#)

Usage:

mot [format]

where

- **mot** *str* into ['format_post_sup']
- **format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med']: generated file post_med.data use format (MED or LATA or LML keyword).

3.56 lata_to_other

Description: To convert results file written with LATA format to MED or LML format. Warning: Fields located at faces are not supported yet.

See also: [interpret \(3\)](#)

Usage:

lata_to_other [**format**] **file** **file_post**

where

- **format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med']: Results format (MED or LATA or LML keyword).
- **file** *str*: LATA file to convert to the new format.
- **file_post** *str*: Name of file post.

3.57 lire_ideas

Description: Read a geom in a unv file. 3D tetra mesh elements only may be read by TRUST.

See also: [interpret \(3\)](#)

Usage:

lire_ideas **nom_dom** **file**

where

- **nom_dom** *str*: Name of domain.
- **file** *str*: Name of file.

3.58 mailer

Description: The Mailler (Mesh) interpreter allows a Domain type object domaine to be meshed with objects objet_1, objet_2, etc...

See also: [interpret \(3\)](#)

Usage:

mailler **domaine** **bloc**

where

- **domaine** *str*: Name of domain.
- **bloc** *list_bloc_mailler* ([3.59](#)): Instructions to mesh.

3.59 list_bloc_mailler

Description: List of block mesh.

See also: [listobj \(35.3\)](#)

Usage:

{ object1 , object2 }

list of *mailler_base* ([3.59.1](#)) separated with ,

3.59.1 mailler_base

Description: Basic class to mesh.

See also: [objet_lecture \(36\)](#) [pave \(3.59.2\)](#) [epsilon \(3.59.12\)](#) [domain \(3.59.13\)](#)

Usage:

3.59.2 pave

Description: Class to create a pave (block) with boundaries.

See also: `mailler_base` (3.59.1)

Usage:

pave name bloc list_bord

where

- **name** *str*: Name of the pave (block).
- **bloc** *bloc_pave* (3.59.3): Definition of the pave (block).
- **list_bord** *list_bord* (3.59.4): Domain boundaries definition.

3.59.3 bloc_pave

Description: Class to create a pave.

See also: `objet_lecture` (36)

Usage:

```
{  
    [ Origine x1 x2 (x3)]  
    [ longueurs x1 x2 (x3)]  
    [ nombre_de_noeuds n1 n2 (n3)]  
    [ facteurs x1 x2 (x3)]  
    [ symx ]  
    [ symy ]  
    [ symz ]  
    [ xtanh float]  
    [ xtanh_dilatation int into [-1, 0, 1]]  
    [ xtanh_taille_premiere_maille float]  
    [ ytanh float]  
    [ ytanh_dilatation int into [-1, 0, 1]]  
    [ ytanh_taille_premiere_maille float]  
    [ ztanh float]  
    [ ztanh_dilatation int into [-1, 0, 1]]  
    [ ztanh_taille_premiere_maille float]  
}
```

where

- **Origine** *x1 x2 (x3)*: Keyword to define the pave (block) origin, that is to say one of the 8 block points (or 4 in a 2D coordinate system).
- **longueurs** *x1 x2 (x3)*: Keyword to define the block dimensions, that is to say knowing the origin, length along the axes.
- **nombre_de_noeuds** *n1 n2 (n3)*: Keyword to define the discretization (nodenumber) in each direction.
- **facteurs** *x1 x2 (x3)*: Keyword to define stretching factors for mesh discretization in each direction. This is a real number which must be positive (by default 1.0). A stretching factor other than 1 allows refinement on one edge in one direction.
- **symx**: Keyword to define a block mesh that is symmetrical with respect to the YZ plane (respectively Y-axis in 2D) passing through the block centre.
- **symy**: Keyword to define a block mesh that is symmetrical with respect to the XZ plane (respectively X-axis in 2D) passing through the block centre.

- **symz** : Keyword defining a block mesh that is symmetrical with respect to the XY plane passing through the block centre.
- **xtanh** *float*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the X-direction.
- **xtanh_dilatation** *int into [-1, 0, 1]*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the X-direction. **xtanh_dilatation**: The value may be -1,0,1 (0 by default): 0: coarse mesh at the middle of the channel and smaller near the walls -1: coarse mesh at the left side of the channel and smaller at the right side 1: coarse mesh at the right side of the channel and smaller near the left side of the channel.
- **xtanh_taille_premiere_maille** *float*: Size of the first cell of the mesh with tanh (hyperbolic tangent) variation in the X-direction.
- **ytanh** *float*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the Y-direction.
- **ytanh_dilatation** *int into [-1, 0, 1]*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the Y-direction. **ytanh_dilatation**: The value may be -1,0,1 (0 by default): 0: coarse mesh at the middle of the channel and smaller near the walls -1: coarse mesh at the bottom of the channel and smaller near the top 1: coarse mesh at the top of the channel and smaller near the bottom.
- **ytanh_taille_premiere_maille** *float*: Size of the first cell of the mesh with tanh (hyperbolic tangent) variation in the Y-direction.
- **ztanh** *float*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the Z-direction.
- **ztanh_dilatation** *int into [-1, 0, 1]*: Keyword to generate mesh with tanh (hyperbolic tangent) variation in the Z-direction. **ztanh_dilatation**: The value may be -1,0,1 (0 by default): 0: coarse mesh at the middle of the channel and smaller near the walls -1: coarse mesh at the back of the channel and smaller near the front 1: coarse mesh at the front of the channel and smaller near the back.
- **ztanh_taille_premiere_maille** *float*: Size of the first cell of the mesh with tanh (hyperbolic tangent) variation in the Z-direction.

3.59.4 list_bord

Description: The block sides.

See also: listobj ([35.3](#))

Usage:

{ object1 object2 }

list of *bord_base* ([3.59.5](#))

3.59.5 bord_base

Description: Basic class for block sides. Block sides that are neither edges nor connectors are not specified. The duplicate nodes of two blocks in contact are automatically recognized and deleted.

See also: objet_lecture ([36](#)) bord ([3.59.6](#)) raccord ([3.59.10](#)) internes ([3.59.11](#))

Usage:

3.59.6 bord

Description: The block side is not in contact with another block and boundary conditions are applied to it.

See also: bord_base ([3.59.5](#))

Usage:

bord nom defbord

where

- **nom** *str*: Name of block side.
- **defbord** *defbord* (3.59.7): Definition of block side.

3.59.7 defbord

Description: Class to define an edge.

See also: [objet_lecture \(36\)](#) [defbord_2 \(3.59.8\)](#) [defbord_3 \(3.59.9\)](#)

Usage:

3.59.8 defbord_2

Description: 1-D edge (straight line) in the 2-D space.

See also: (3.59.7)

Usage:

dir eq pos pos2_min inf1 dir2 inf2 pos2_max
where

- **dir** *str into* ['X', 'Y']: Edge is perpendicular to this direction.
- **eq** *str into* ['=']: Equality sign.
- **pos** *float*: Position value.
- **pos2_min** *float*: Minimal value.
- **inf1** *str into* ['<=']: Less than or equal to sign.
- **dir2** *str into* ['X', 'Y']: Edge is parallel to this direction.
- **inf2** *str into* ['<=']: Less than or equal to sign.
- **pos2_max** *float*: Maximal value.

3.59.9 defbord_3

Description: 2-D edge (plane) in the 3-D space.

See also: (3.59.7)

Usage:

dir eq pos pos2_min inf1 dir2 inf2 pos2_max pos3_min inf3 dir3 inf4 pos3_max
where

- **dir** *str into* ['X', 'Y', 'Z']: Edge is perpendicular to this direction.
- **eq** *str into* ['=']: Equality sign.
- **pos** *float*: Position value.
- **pos2_min** *float*: Minimal value.
- **inf1** *str into* ['<=']: Less than or equal to sign.
- **dir2** *str into* ['X', 'Y']: Edge is parallel to this direction.
- **inf2** *str into* ['<=']: Less than or equal to sign.
- **pos2_max** *float*: Maximal value.
- **pos3_min** *float*: Minimal value.
- **inf3** *str into* ['<=']: Less than or equal to sign.
- **dir3** *str into* ['Y', 'Z']: Edge is parallel to this direction.
- **inf4** *str into* ['<=']: Less than or equal to sign.
- **pos3_max** *float*: Maximal value.

3.59.10 raccord

Description: The block side is in contact with the block of another domain (case of two coupled problems).

See also: `bord_base` ([3.59.5](#))

Usage:

raccord **type1** **type2** **nom** **defbord**

where

- **type1** *str* into ['local', 'distant']: Contact type.
- **type2** *str* into ['homogene']: Contact type.
- **nom** *str*: Name of block side.
- **defbord** *defbord* ([3.59.7](#)): Definition of block side.

3.59.11 internes

Description: To indicate that the block has a set of internal faces (these faces will be duplicated automatically by the program and will be processed in a manner similar to edge faces).

Two boundaries with the same boundary conditions may have the same name (whether or not they belong to the same block).

The keyword Internes (Internal) must be used to execute a calculation with plates, followed by the equation of the surface area covered by the plates.

See also: `bord_base` ([3.59.5](#))

Usage:

internes **nom** **defbord**

where

- **nom** *str*: Name of block side.
- **defbord** *defbord* ([3.59.7](#)): Definition of block side.

3.59.12 epsilon

Description: Two points will be confused if the distance between them is less than `eps`. By default, `eps` is set to 1e-12. The keyword Epsilon allows an alternative value to be assigned to `eps`.

See also: `mailler_base` ([3.59.1](#))

Usage:

epsilon **eps**

where

- **eps** *float*: New value of precision.

3.59.13 domain

Description: Class to reuse a domain.

See also: `mailler_base` ([3.59.1](#))

Usage:

domain **domain_name**

where

- **domain_name** *str*: Name of domain.

3.60 maillerparallel

Description: creates a parallel distributed hexaedral mesh of a parallelepipedic box. It is equivalent to creating a mesh with a single Pave, splitting it with Decouper and reloading it in parallel with Scatter. It only works in 3D at this time. It can also be used for a sequential computation (with all NPARTS=1)}

See also: [interpret \(3\)](#)

Usage:

```
maillerparallel {
    domain str
    nb_nodes n n1 n2 ... nn
    splitting n n1 n2 ... nn
    ghost_thickness int
    [ perio_x ]
    [ perio_y ]
    [ perio_z ]
    [ function_coord_x str ]
    [ function_coord_y str ]
    [ function_coord_z str ]
    [ file_coord_x str ]
    [ file_coord_y str ]
    [ file_coord_z str ]
    [ boundary_xmin str ]
    [ boundary_xmax str ]
    [ boundary_ymin str ]
    [ boundary_ymax str ]
    [ boundary_zmin str ]
    [ boundary_zmax str ]
}
```

where

- **domain** *str*: the name of the domain to mesh (it must be an empty domain object).
- **nb_nodes** *n n1 n2 ... nn*: dimension defines the spatial dimension (currently only dimension=3 is supported), and nX, nY and nZ defines the total number of nodes in the mesh in each direction.
- **splitting** *n n1 n2 ... nn*: dimension is the spatial dimension and npartsX, npartsY and npartsZ are the number of parts created. The product of the number of parts must be equal to the number of processors used for the computation.
- **ghost_thickness** *int*: the number of ghost cells (equivalent to the `epaisseur_joint` parameter of Decouper).
- **perio_x** : change the splitting method to provide a valid mesh for periodic boundary conditions.
- **perio_y** : change the splitting method to provide a valid mesh for periodic boundary conditions.
- **perio_z** : change the splitting method to provide a valid mesh for periodic boundary conditions.
- **function_coord_x** *str*: By default, the meshing algorithm creates nX nY nZ coordinates ranging between 0 and 1 (eg a unity size box). If `function_coord_x` is specified, it is used to transform the [0,1] segment to the coordinates of the nodes. `funcX` must be a function of the x variable only.
- **function_coord_y** *str*: like `function_coord_x` for y
- **function_coord_z** *str*: like `function_coord_x` for z
- **file_coord_x** *str*: Keyword to read the Nx floating point values used as nodes coordinates in the file.

- **file_coord_y** *str*: idem file_coord_x for y
- **file_coord_z** *str*: idem file_coord_x for z
- **boundary_xmin** *str*: the name of the boundary at the minimum X direction. If it not provided, the default boundary names are xmin, xmax, ymin, ymax, zmin and zmax. If the mesh is periodic in a given direction, only the MIN boundary name is used, for both sides of the box.
- **boundary_xmax** *str*
- **boundary_ymin** *str*
- **boundary_ymax** *str*
- **boundary_zmin** *str*
- **boundary_zmax** *str*

3.61 **modif_bord_to_raccord**

Description: Keyword to convert a boundary of domain_name domain of kind Bord to a boundary of kind Raccord (named boundary_name). It is useful when using meshes with boundaries of kind Bord defined and to run a coupled calculation.

See also: [interprete \(3\)](#)

Usage:

modif_bord_to_raccord **domaine** **nom_bord**

where

- **domaine** *str*: Name of domain
- **nom_bord** *str*: Name of the boundary to transform.

3.62 **moyenne_volumique**

Description: This keyword should be used after Resoudre keyword. It computes the convolution product of one or more fields with a given filtering function.

See also: [interprete \(3\)](#)

Usage:

```
moyenne_volumique {
    nom_pb str
    nom_domaine str
    noms_champs n word1 word2 ... wordn
    [ nom_fichier_post str ]
    [ format_post str ]
    [ localisation str into ['elem', 'som']]
    fonction_filtre bloc_lecture
}
```

where

- **nom_pb** *str*: name of the problem where the source fields will be searched.
- **nom_domaine** *str*: name of the destination domain (for example, it can be a coarser mesh, but for optimal performance in parallel, the domain should be split with the same algorithm as the computation mesh, eg, same tranche parameters for example)
- **noms_champs** *n word1 word2 ... wordn*: name of the source fields (these fields must be accessible from the postraitement) N source_field1 source_field2 ... source_fieldN

- **nom_fichier_post** *str*: indicates the filename where the result is written
- **format_post** *str*: gives the fileformat for the result (by default : lata)
- **localisation** *str* into [*'elem'*, *'som'*]: indicates where the convolution product should be computed: either on the elements or on the nodes of the destination domain.
- **fonction_filtre** *bloc_lecture* (3.9): to specify the given filter

```
Fonction_filtre {
  type filter_type
  demie-largeur l
  [ omega w ]
  [ expression string ]
}
```

type filter_type : This parameter specifies the filtering function. Valid filter_type are:

Boite is a box filter, $f(x, y, z) = (abs(x) < l) * (abs(y) < l) * (abs(z) < l) / (8l^3)$

Chapeau is a hat filter (product of hat filters in each direction) centered on the origin, the half-width of the filter being l and its integral being 1.

Quadra is a 2nd order filter.

Gaussienne is a normalized gaussian filter of standard deviation sigma in each direction (all field elements outside a cubic box defined by clipping_half_width are ignored, hence, taking clipping_half_width=2.5*sigma yields an integral of 0.99 for a uniform unity field).

Parser allows a user defined function of the x,y,z variables. All elements outside a cubic box defined by clipping_half_width are ignored. The parser is much slower than the equivalent c++ coded function...

demie-largeur l : This parameter specifies the half width of the filter

[omega w] : This parameter must be given for the gaussienne filter. It defines the standard deviation of the gaussian filter.

[expression string] : This parameter must be given for the parser filter type. This expression will be interpreted by the math parser with the predefined variables x, y and z.

3.63 nettoiepasnoeuds

Description: Keyword NettoiePasNoeuds does not delete useless nodes (nodes without elements) from a domain.

See also: [interpret](#) (3)

Usage:

nettoiepasnoeuds **domain_name**

where

- **domain_name** *str*: Name of domain.

3.64 option_vdf

Description: Class of VDF options.

See also: [interpret](#) (3)

Usage:

option_vdf {

[**traitement_coins** *str* into [*'oui'*, *'non'*]]

```
[ p_imposee_aux_faces str into ['oui', 'non']]
}
```

where

- **traitement_coins** *str* into ['oui', 'non']: Treatment of corners (yes or no). This option modifies slightly the calculations at the outlet of the plane channel. It supposes that the boundary continues after channel outlet (i.e. velocity vector remains parallel to the boundary).
- **p_imposee_aux_faces** *str* into ['oui', 'non']: Pressure imposed at the faces (yes or no).

3.65 orientefacesbord

Description: Keyword to modify the order of the boundary vertices included in a domain, such that the surface normals are outer pointing.

See also: [interpret \(3\)](#)

Usage:

orientefacesbord **domain_name**
where

- **domain_name** *str*: Name of domain.

3.66 partition

Synonymous: **decouper**

Description: Class for parallel calculation to cut a domain for each processor. By default, this keyword is commented in the reference test cases.

See also: [interpret \(3\)](#)

Usage:

partition **domaine** **bloc_decouper**
where

- **domaine** *str*: Name of the domain to be cut.
- **bloc_decouper** *bloc_decouper* ([3.67](#)): Description how to cut a domain.

3.67 bloc_decouper

Description: Auxiliary class to cut a domain.

See also: [objet_lecture \(36\)](#)

Usage:

```
{
  [ Partition_toolpartitionneur partitionneur_deriv]
  [ larg_joint int]
  [ zones_namelnom_zones str]
  [ ecrire_decoupage str]
  [ ecrire_lata str]
  [ nb_parts_tot int]
```



```

[ periodique n word1 word2 ... wordn]
[ reorder int]
[ single_hdf ]
[ print_more_infos int]
}
where

```

- **Partition_toolpartitionneur** *partitionneur_deriv* (27): Defines the partitionning algorithm (the effective C++ object used is 'Partitionneur_ALGORITHM_NAME').
- **larg_joint** *int*: This keyword specifies the thickness of the virtual ghost zone (data known by one processor though not owned by it). The default value is 1 and is generally correct for all algorithms except the QUICK convection scheme that require a thickness of 2. Since the 1.5.5 version, the VEF discretization imply also a thickness of 2 (except VEF P0). Any non-zero positive value can be used, but the amount of data to store and exchange between processors grows quickly with the thickness.
- **zones_namelnom_zones** *str*: Name of the files containing the different partition of the domain. The files will be :
name_0001.Zones
name_0002.Zones
...
name_000n.Zones. If this keyword is not specified, the geometry is not written on disk (you might just want to generate a 'ecrire_decoupage' or 'ecrire_lata').
- **ecrire_decoupage** *str*: After having called the partitionning algorithm, the resulting partition is written on disk in the specified filename. See also partitionneur Fichier_Decoupage. This keyword is useful to change the partition numbers: first, you write the partition into a file with the option *ecrire_decoupage*. This file contains the zone number for each element's mesh. Then you can easily permute zone numbers in this file. Then read the new partition to create the .Zones files with the Fichier_Decoupage keyword.
- **ecrire_lata** *str*
- **nb_parts_tot** *int*: Keyword to generates N .Zone files, instead of the default number M obtained after the partitionning algorithm. N must be greater or equal to M. This option might be used to perform coupled parallel computations. Supplemental empty zones from M to N-1 are created. This keyword is used when you want to run a parallel calculation on several domains with for example, 2 processors on a first domain and 10 on the second domain because the first domain is very small compare to second one. You will write Nb_parts 2 and Nb_parts_tot 10 for the first domain and Nb_parts 10 for the second domain.
- **periodique** *n word1 word2 ... wordn*: N BOUNDARY_NAME_1 BOUNDARY_NAME_2 ... : N is the number of boundary names given. Periodic boundaries must be declared by this method. The partitionning algorithm will ensure that facing nodes and faces in the periodic boundaries are located on the same processor.
- **reorder** *int*: If this option is set to 1 (0 by default), the partition is renumbered in order that the processes which communicate the most are nearer on the network. This may slightly improves parallel performance.
- **single_hdf** : Optional keyword to enable you to write the partitioned zones in a single file in hdf5 format.
- **print_more_infos** *int*: If this option is set to 1 (0 by default), print infos about number of remote elements (ghosts) and additional infos about the quality of partitionning. Warning, it slows down the cutting operations.

3.68 pilote_icoco

Description: not_set

See also: interpret (3)

Usage:

```
pilote_icoco {  
    pb_name str  
    main str  
}  
where
```

- **pb_name** *str*
- **main** *str*

3.69 polyedriser

Description: cast hexahedra into polyhedra so that the indexing of the mesh vertices is compatible with PolyMAC discretization. Must be used in PolyMAC discretization if a hexahedral mesh has been produced with TRUST's internal mesh generator.

See also: [interpret \(3\)](#)

Usage:

```
polyedriser domain_name  
where
```

- **domain_name** *str*: Name of domain.

3.70 porosites

Description: To define the volume porosity and surface porosity that are uniform in every direction in space on a sub-area.

Porosity was only usable in VDF discretization, and now available for VEF P1NC/P0.

Observations :

- Surface porosity values must be given in every direction in space (set this value to 1 if there is no porosity),
 - Prior to defining porosity, the problem must have been discretized.
- Can 't be used in VEF discretization, use Porosites_champ instead.

See also: [interpret \(3\)](#)

Usage:

```
porosites pb sous_zone bloc  
where
```

- **pb** *str*: Name of the problem to which the sub-area is attached.
- **sous_zone** *str*: Name of the sub-area to which porosity are allocated.
- **bloc** *bloc_lecture_poro* ([3.71](#)): Surface and volume porosity values.

3.71 bloc_lecture_poro

Description: Surface and volume porosity values.

See also: [objet_lecture \(36\)](#)

Usage:

```
{
```

```

    volumique float
    surfacique n x1 x2 ... xn
}
where

```

- **volumique** *float*: Volume porosity value.
- **surfacique** *n x1 x2 ... xn*: Surface porosity values (in X, Y, Z directions).

3.72 porosites_champ

Description: The porosity is given at each element and the porosity at each face, $\Psi(\text{face})$, is calculated by the average of the porosities of the two neighbour elements $\Psi(\text{elem1})$, $\Psi(\text{elem2})$: $\Psi(\text{face}) = 2 / (1/\Psi(\text{elem1}) + 1/\Psi(\text{elem2}))$.

Keyword Discretize should have already been used to read the object.
See also: [interpret](#) (3)

Usage:

```

porosites_champ pb ch
where

```

- **pb** *str*: Name of the problem to which the sub-area is attached.
- **ch** *champ_base* (16.1): field used to define the porosity field

3.73 postraiter_domaine

Description: To write one or more domains in a file with a specified format (MED,LML,LATA).

See also: [interpret](#) (3)

Usage:

```

postraiter_domaine {
    format str into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med']
    [ filefichier str]
    [ domaine str]
    [ domaines bloc_lecture]
    [ joints_non_postraites int into [0, 1]]
    [ binaire int into [0, 1]]
    [ ecrire_frontiere int into [0, 1]]
}
where

```

- **format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med']: File format.
- **filefichier** *str*: The file name can be changed with the fichier option.
- **domaine** *str*: Name of domain
- **domaines** *bloc_lecture* (3.9): Names of domains : { name1 name2 }
- **joints_non_postraites** *int* into [0, 1]: The joints_non_postraites (1 by default) will not write the boundaries between the partitioned mesh.
- **binaire** *int* into [0, 1]: Binary (binaire 1) or ASCII (binaire 0) may be used. By default, it is 0 for LATA and only ASCII is available for LML and only binary is available for MED.
- **ecrire_frontiere** *int* into [0, 1]: This option will write (if set to 1, the default) or not (if set to 0) the boundaries as fields into the file (it is useful to not add the boundaries when writing a domain extracted from another domain)

3.74 precisiongeom

Description: Class to change the way floating-point number comparison is done. By default, two numbers are equal if their absolute difference is smaller than $1e-10$. The keyword is useful to modify this value. Moreover, nodes coordinates will be written in .geom files with this same precision.

See also: [interpret](#) (3)

Usage:


precisiongeom **precision**

where

- **precision** *float*: New value of precision.

3.75 raffiner_anisotrope

Description: Only for VEF discretizations, allows to cut triangle elements in 3, or tetrahedra in 4 parts, by defining a new summit located at the center of the element:

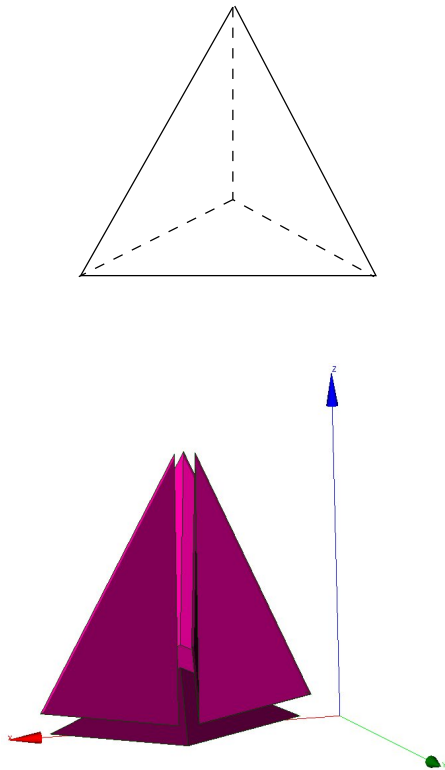

Note that such a cut creates flat elements (anisotropic).

See also: [interpret](#) (3)

Usage:

raffiner_anisotrope **domain_name**


where

- **domain_name** *str*: Name of domain.


3.76 raffiner_isotrope

Synonymous: **raffiner_simplexes**

Description: For VDF and VEF discretizations, allows to cut triangles/quadrangles or tetrahedral/hexaedras elements respectively in 4 or 8 new ones by defining new summits located at the middle of edges (and center of faces and elements for quadrangles and hexaedra). Such a cut preserves the shape of original elements (isotropic). For 2D elements:

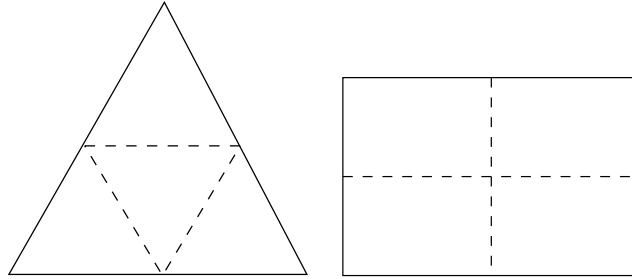

For 3D elements:

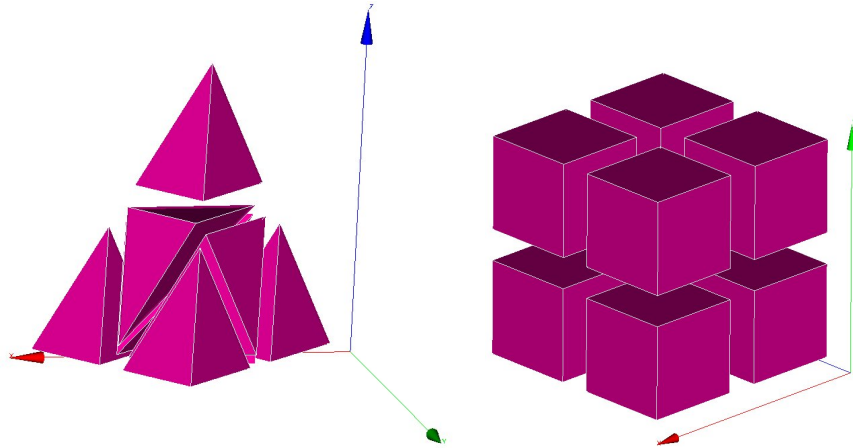

See also: [interpret \(3\)](#)

Usage:

raffiner_isotrope domain_name

where

- **domain_name** *str*: Name of domain.

3.77 read

Synonymous: **lire**

Description: Interpreter to read the **a_object** object defined between the braces.

See also: [interpret \(3\)](#)

Usage:

read a_object bloc

where

- **a_object** *str*: Object to be read.
- **bloc** *str*: Definition of the object.

3.78 read_file

Synonymous: **lire_fichier**

Description: Keyword to read the object name_obj contained in the file filename.

This is notably used when the calculation domain has already been meshed and the mesh contains the file filename, simply write read_file dom filename (where dom is the name of the meshed domain).

If the filename is ;, is to execute a data set given in the file of name name_obj (a space must be entered between the semi-colon and the file name).

See also: interpret (3) read_unsupported_ascii_file_from_icem (3.81) read_file_binary (3.79)

Usage:

read_file name_obj filename

where

- **name_obj** *str*: Name of the object to be read.
- **filename** *str*: Name of the file.

3.79 read_file_binary

Synonymous: **lire_fichier_bin**

Description: Keyword to read an object name_obj in the unformatted type file filename.

See also: read_file (3.78)

Usage:

read_file_binary name_obj filename

where

- **name_obj** *str*: Name of the object to be read.
- **filename** *str*: Name of the file.

3.80 lire_tgrid

Description: Keyword to read Tgrid/Gambit mesh files. 2D (triangles or quadrangles) and 3D (tetra or hexa elements) meshes, may be read by TRUST.

See also: interpret (3)

Usage:

lire_tgrid dom filename

where

- **dom** *str*: Name of domaine.
- **filename** *str*: Name of file containing the mesh.

3.81 read_unsupported_ascii_file_from_icem

Description: not_set

See also: read_file ([3.78](#))

Usage:

read_unsupported_ascii_file_from_icem **name_obj** **filename**

where

- **name_obj** *str*: Name of the object to be read.
- **filename** *str*: Name of the file.

3.82 orienter_simplexes

Synonymous: **rectify_mesh**

Description: Keyword to raffine a mesh

See also: interpret ([3](#))

Usage:

orienter_simplexes **domain_name**

where

- **domain_name** *str*: Name of domain.

3.83 redresser_hexaedres_vdf

Description: Keyword to convert a domain (named domain_name) with quadrilaterals/VEF hexaedras which looks like rectangles/VDF hexaedras into a domain with real rectangles/VDF hexaedras.

See also: interpret ([3](#))

Usage:

redresser_hexaedres_vdf **domain_name**

where

- **domain_name** *str*: Name of domain to resequence.

3.84 refine_mesh

Description: not_set

See also: interpret ([3](#))

Usage:

refine_mesh **domaine**

where

- **domaine** *str*

3.85 regroupebord

Description: Keyword to build one boundary new_bord with several boundaries of the domain named domaine.

See also: [interpret \(3\)](#)

Usage:

regroupebord **domaine** **new_bord** **bords**

where

- **domaine** *str*: Name of domain
- **new_bord** *str*: Name of the new boundary
- **bords** *bloc_lecture* [\(3.9\)](#): { Bound1 Bound2 }


3.86 remove_elem

Description: Keyword to remove element from a VDF mesh (named domaine_name), either from an explicit list of elements or from a geometric condition defined by a condition $f(x,y)>0$ in 2D and $f(x,y,z)>0$ in 3D. All the new borders generated are gathered in one boundary called : newBord (to rename it, use RegroupeBord keyword). To split it to different boundaries, use DecoupeBord_Pour_Rayonnement keyword). Example of a removed zone of radius 0.2 centered at $(x,y)=(0.5,0.5)$:


Remove_elem dom { fonction $0.2 * 0.2 - (x - 0.5)^2 - (y - 0.5)^2 > 0$ }

Warning : the thickness of removed zone has to be large enough to avoid singular nodes as decribed below :

UNCORRECT – 2 SINGULAR NODES

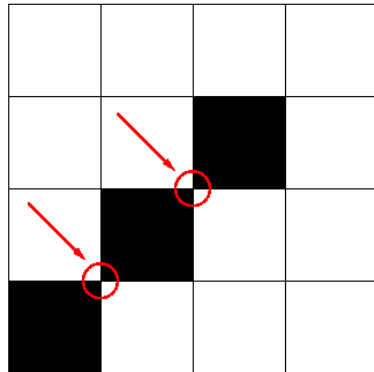

CORRECT

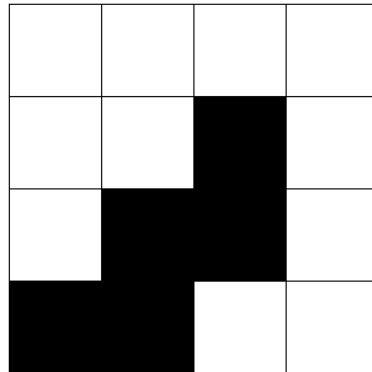

See also: [interpret \(3\)](#)

Usage:

remove_elem **domaine** **bloc**

where

- **domaine** *str*: Name of domain
- **bloc** *remove_elem_bloc* [\(3.87\)](#)

3.87 remove_elem_bloc

Description: not_set

See also: `objet_lecture` (36)

Usage:

```
{  
    [ liste  n n1 n2 ... nn ]  
    [ fonction  str ]  
}
```

where

- **liste** *n n1 n2 ... nn*
- **fonction** *str*

3.88 `remove_invalid_internal_boundaries`

Description: Keyword to suppress an internal boundary of the `domain_name` domain. Indeed, some mesh tools may define internal boundaries (eg: for post processing task after the calculation) but TRUST does not support it yet.

See also: `interpret` (3)

Usage:

```
remove_invalid_internal_boundaries  domain_name  
where
```

- **domain_name** *str*: Name of domain.

3.89 `reorienter_tetraedres`

Description: This keyword is mandatory for front-tracking computations with the VEF discretization. For each tetrahedral element of the domain, it checks if it has a positive volume. If the volume (determinant of the three vectors) is negative, it swaps two nodes to reverse the orientation of this tetrahedron.

See also: `interpret` (3)

Usage:

```
reorienter_tetraedres  domain_name  
where
```

- **domain_name** *str*: Name of domain.

3.90 `reorienter_triangles`

Description: `not_set`

See also: `interpret` (3)

Usage:

```
reorienter_triangles  domain_name  
where
```

- **domain_name** *str*: Name of domain.

3.91 reordonner

Description: The Reordonner interpreter is required sometimes for a VDF mesh which is not produced by the internal mesher. Example where this is used:

Read_file dom fichier.geom

Reordonner dom

Observations: This keyword is redundant when the mesh that is read is correctly sequenced in the TRUST sense. This significant mesh operation may take some time... The message returned by TRUST is not explicit when the Reordonner (Resequencing) keyword is required but not included in the data set...

See also: [interprete \(3\)](#)

Usage:

reordonner domain_name

where

- **domain_name** *str*: Name of domain to resequence.

3.92 rotation

Description: Keyword to rotate the geometry of an arbitrary angle around an axis aligned with Ox, Oy or Oz axis.

See also: [interprete \(3\)](#)

Usage:

rotation domain_name dir coord1 coord2 angle

where

- **domain_name** *str*: Name of domain to which the transformation is applied.
- **dir** *str* into ['X', 'Y', 'Z']: X, Y or Z to indicate the direction of the rotation axis
- **coord1** *float*: coordinates of the center of rotation in the plane orthogonal to the rotation axis. These coordinates must be specified in the direct triad sense.
- **coord2** *float*
- **angle** *float*: angle of rotation (in degrees)

3.93 scatter

Description: Class to read a partitioned mesh in the files during a parallel calculation. The files are in binary format.

See also: [interprete \(3\)](#) [scattermed \(3.94\)](#)

Usage:

scatter file domaine

where

- **file** *str*: Name of file.
- **domaine** *str*: Name of domain.

3.94 scattermed

Description: This keyword will read the partition of the domain_name domain into a the MED format files file.med created by Medsplitter.

See also: scatter ([3.93](#))

Usage:

scattermed file domaine

where

- **file** *str*: Name of file.
- **domaine** *str*: Name of domain.

3.95 solve

Synonymous: **resoudre**

Description: Interpreter to start calculation with TRUST.

Keyword Discretize should have already been used to read the object.

See also: interpret ([3](#))

Usage:

solve pb

where

- **pb** *str*: Name of problem to be solved.

3.96 supprime_bord

Description: Keyword to remove boundaries (named Boundary_name1 Boundary_name2) of the domain named domain_name.

See also: interpret ([3](#))

Usage:

supprime_bord domaine bords

where

- **domaine** *str*: Name of domain
- **bords** *list_nom* ([3.97](#)): { Boundary_name1 Boundary_name2 }

3.97 list_nom

Description: List of name.

See also: listobj ([35.3](#))

Usage:

{ object1 object2 }

list of *nom_anonyme* ([26.1](#))

3.98 system

Description: To run Unix commands from the data file. Example: System 'echo The End | mail trust@cea.fr'

See also: [interpret \(3\)](#)

Usage:

system cmd

where

- **cmd** *str*: command to execute.

3.99 test_solveur

Description: To test several solvers

See also: [interpret \(3\)](#)

Usage:

test_solveur {

```
[ fichier_secmem  str]
[ fichier_matrice str]
[ fichier_solution str]
[ nb_test      int]
[ impr  ]
[ solveur  solveur_sys_base]
[ fichier_solveur str]
[ genere_fichier_solveur float]
[ seuil_verification float]
[ pas_de_solution_initiale ]
[ ascii  ]
```

}

where

- **fichier_secmem** *str*: Filename containing the second member B
- **fichier_matrice** *str*: Filename containing the matrix A
- **fichier_solution** *str*: Filename containing the solution x
- **nb_test** *int*: Number of tests to measure the time resolution (one preconditionnement)
- **impr** : To print the convergence solver
- **solveur** *solveur_sys_base* (10.17): To specify a solver
- **fichier_solveur** *str*: To specify a file containing a list of solvers
- **genere_fichier_solveur** *float*: To create a file of the solver with a threshold convergence
- **seuil_verification** *float*: Check if the solution satisfy $\|Ax-B\| < \text{precision}$
- **pas_de_solution_initiale** : Resolution isn't initialized with the solution x
- **ascii** : Ascii files

3.100 testeur

Description: not_set

See also: [interpret \(3\)](#)

Usage:

testeur data

where

- **data** *bloc_lecture* (3.9)

3.101 testeur_medcoupling

Description: not_set

See also: [interprete \(3\)](#)

Usage:


testeur_medcoupling pb_name field_name

where

- **pb_name** *str*: Name of domain.
- **field_name** *str*: Name of domain.

3.102 tetraedriser

Description: To achieve a tetrahedral mesh based on a mesh comprising blocks, the Tetraedriser (Tetraedrise) interpreter is used in VEF discretization. Initial block is divided in 6 tetrahedra:

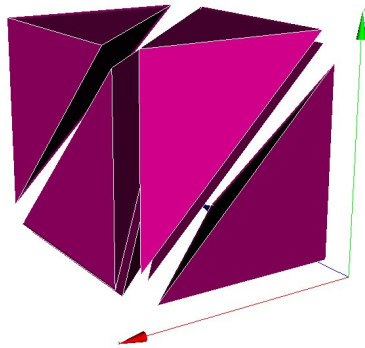

See also: [interprete \(3\)](#) [tetraedriser_homogene \(3.103\)](#) [tetraedriser_homogene_fin \(3.105\)](#) [tetraedriser_homogene_compact \(3.104\)](#) [tetraedriser_par_prisme \(3.106\)](#)

Usage:


tetraedriser domain_name

where

- **domain_name** *str*: Name of domain.

3.103 tetraedriser_homogene

Description: Use the Tetraedriser_homogene (Homogeneous_Tetrahedralisation) interpreter in VEF discretization to mesh a block in tetrahedrals. Each block hexahedral is no longer divided into 6 tetrahedrals (keyword Tetraedriser (Tetrahedralise)), it is now broken down into 40 tetrahedrals. Thus a block defined with 11 nodes in each X, Y, Z direction will contain $10*10*10*40=40,000$ tetrahedrals. This also allows problems in the mesh corners with the P1NC/P1iso/P1bulle or P1/P1 discretization items to be avoided. Initial block is divided in 40 tetrahedra:

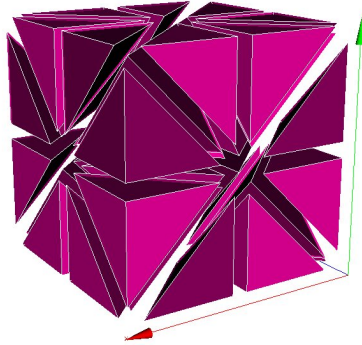

See also: tetraedriser ([3.102](#))

Usage:


tetraedriser_homogene **domain_name**

where

- **domain_name** *str*: Name of domain.

3.104 tetraedriser_homogene_compact

Description: This new discretization generates tetrahedral elements from cartesian or non-cartesian hexahedral elements. The process cut each hexahedral in 6 pyramids, each of them being cut then in 4 tetrahedral. So, in comparison with tetra_homogene, less elements (*24 instead of*40) with more homogeneous volumes are generated. Moreover, this process is done in a faster way. Initial block is divided in 24 tetrahedra:

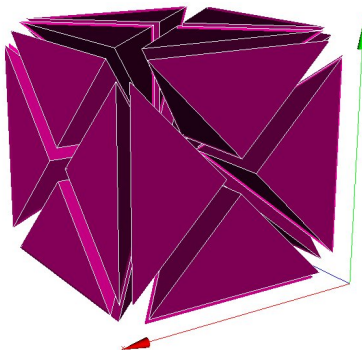

See also: tetraedriser ([3.102](#))

Usage:

tetraedriser_homogeneous_compact **domain_name**


where

- **domain_name** *str*: Name of domain.

3.105 **tetraedriser_homogeneous_fin**

Description: Tetraedriser_homogeneous_fin is the recommended option to tetrahedralise blocks. As an extension (subdivision) of Tetraedriser_homogeneous_compact, this last one cut each initial block in 48 tetrahedra (against 24, previously). This cutting ensures :

- a correct cutting in the corners (in respect to pressure discretization PreP1B),
- a better isotropy of elements than with Tetraedriser_homogeneous_compact,
- a better alignment of summits (this could have a benefit effect on calculation near walls since first elements in contact with it are all contained in the same constant thickness and ii/ by the way, a 3D cartesian grid based on summits can be engendered and used to realise spectral analysis in HIT for instance). Initial block is divided in 48 tetrahedra:

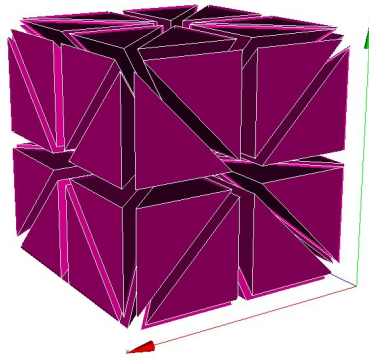

See also: tetraedriser ([3.102](#))

Usage:


tetraedriser_homogeneous_fin **domain_name**

where

- **domain_name** *str*: Name of domain.

3.106 **tetraedriser_par_prisme**

Description: Tetraedriser_par_prisme generates 6 iso-volume tetrahedral element from primary hexahedral one (contrarily to the 5 elements ordinarily generated by tetraedriser). This element is suitable for calculation of gradients at the summit (coincident with the gravity centre of the jointed elements related with) and spectra (due to a better alignment of the points).

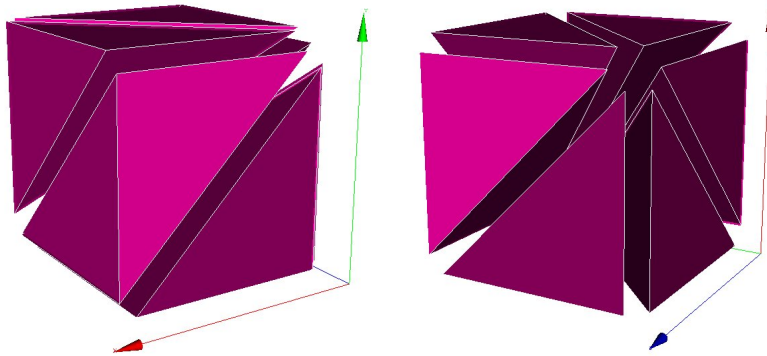

Initial block is divided in 6 prisms.

See also: [tetraedriser \(3.102\)](#)

Usage:

tetraedriser_par_prisme **domain_name**

where

- **domain_name** *str*: Name of domain.

3.107 transformer

Description: Keyword to transform the coordinates of the geometry.

Exemple to rotate your mesh by a 90o rotation and to scale the z coordinates by a factor 2: Transformer
domain_name -y -x 2*z

See also: [interpret \(3\)](#)

Usage:

transformer **domain_name** **formule**

where

- **domain_name** *str*: Name of domain.
- **formule** *word1 word2 (word3)*: Function_for_x Function_for_y

Function_forz

3.108 trianguler

Description: To achieve a triangular mesh from a mesh comprising rectangles (2 triangles per rectangle). Should be used in VEF discretization. Principle:


See also: [interpret \(3\)](#) [trianguler_h \(3.110\)](#) [trianguler_fin \(3.109\)](#)

Usage:

trianguler **domain_name**

where

- **domain_name** *str*: Name of domain.

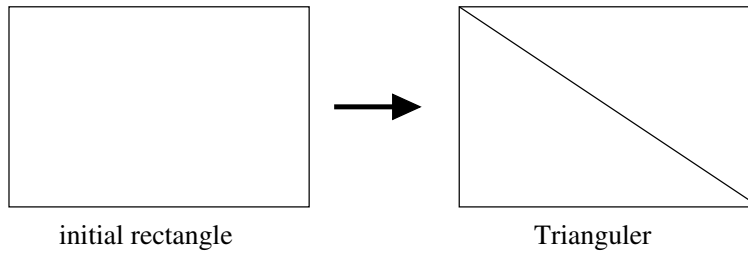


3.109 **triangler_fin**

Description: **Triangler_fin** is the recommended option to triangulate rectangles.

As an extension (subdivision) of **Triangler_h** option, this one cut each initial rectangle in 8 triangles (against 4, previously). This cutting ensures :

- a correct cutting in the corners (in respect to pressure discretization PreP1B).
- a better isotropy of elements than with **Triangler_h** option.
- a better alignment of summits (this could have a benefit effect on calculation near walls since first elements in contact with it are all contained in the same constant thickness, and, by this way, a 2D cartesian grid based on summits can be engendered and used to realize statistical analysis in plane channel configuration for instance). Principle:

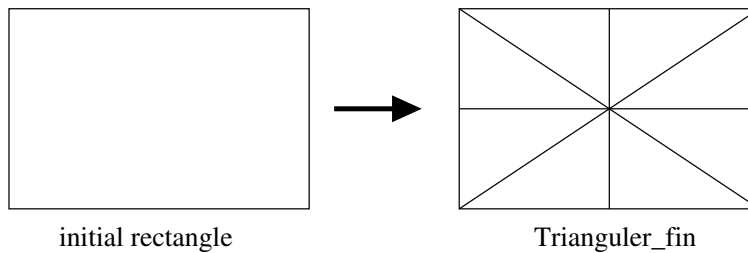

See also: [triangler \(3.108\)](#)

Usage:

triangler_fin **domain_name**

where

- **domain_name** *str*: Name of domain.

3.110 **triangler_h**

Description: To achieve a triangular mesh from a mesh comprising rectangles (4 triangles per rectangle). Should be used in VEF discretization. Principle:


See also: [triangler \(3.108\)](#)

Usage:

triangler_h **domain_name**

where

- **domain_name** *str*: Name of domain.

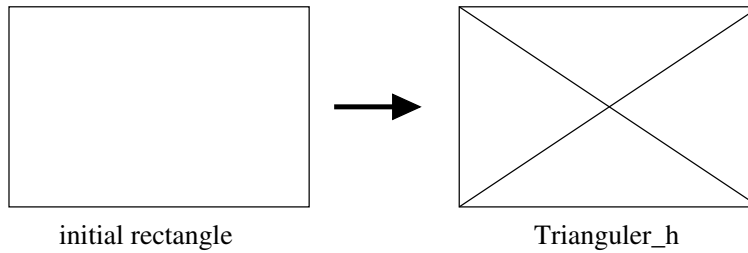

3.111 **verifier_qualite_raffinements**

Description: not_set

See also: interpret (3)

Usage:

verifier_qualite_raffinements **domain_names**
where

- **domain_names** *vect_nom* (3.112)

3.112 **vect_nom**

Description: Vect of name.

See also: listobj (35.3)

Usage:

n object1 object2
list of *nom_anonyme* (26.1)

3.113 **verifier_simplexes**

Description: Keyword to raffine a simplexes

See also: interpret (3)

Usage:

verifier_simplexes **domain_name**
where

- **domain_name** *str*: Name of domain.

3.114 **verfiercoin**

Description: This keyword subdivides inconsistent 2D/3D cells used with VEFPreP1B discretization. Must be used before the mesh is discretized. The Read_file option can be used only if the file.decoupage_som was previously created by TRUST. This option, only in 2D, reverses the common face at two cells (at least one is inconsistent), through the nodes opposed. In 3D, the option has no effect.

The expert_only option deactivates, into the VEFPreP1B divergence operator, the test of inconsistent cells.

See also: interpret (3)

Usage:

verifiercoin domain_name bloc

where

- **domain_name** *str*: Name of the domaine
- **bloc** *verifiercoin_bloc* (3.115)

3.115 verifiercoin_bloc

Description: not_set

See also: objet_lecture (36)

Usage:

```
{  
    [ Lire_fichier|Read_file str ]  
    [ expert_only ]  
}
```

where

- **Lire_fichier|Read_file** *str*: name of the *.decoupage_som file
- **expert_only** : to not check the mesh

3.116 ecrire

Description: Keyword to write the object of name name_obj to a standard outlet.

See also: interprete (3)

Usage:

ecrire name_obj

where

- **name_obj** *str*: Name of the object to be written.

3.117 ecrire_fichier_bin

Synonymous: **ecrire_fichier**

Description: Keyword to write the object of name name_obj to a file filename. Since the v1.6.3, the default format is now binary format file.

See also: interprete (3) ecrire_fichier_formatte (3.32)

Usage:

ecrire_fichier_bin name_obj filename

where

- **name_obj** *str*: Name of the object to be written.
- **filename** *str*: Name of the file.

3.118 **ecrire_med**

Description: Write a domain to MED format into a file.

See also: [interpret](#) (3) [ecrire_medfile](#) (3.119)

Usage:

ecrire_med nom_dom file

where

- **nom_dom** *str*: Name of domain.
- **file** *str*: Name of file.

3.119 **ecrire_medfile**

Description: Obsolete keyword to write a mesh with MED file API

See also: [ecrire_med](#) (3.118)

Usage:

ecrire_medfile nom_dom file

where

- **nom_dom** *str*: Name of domain.
- **file** *str*: Name of file.

4 **pb_gen_base**

Description: Basic class for problems.

See also: [objet_u](#) (37) [Pb_base](#) (4.10) [probleme_couple](#) (4.11) [pbc_med](#) (4.42) [pb_mg](#) (4.27)

Usage:

4.1 **Pb_Conduction**

Description: Resolution of the heat equation.

Keyword Discretize should have already been used to read the object.

See also: [Pb_base](#) (4.10)

Usage:

Pb_Conduction obj Lire obj {

```
[ Conduction conduction]  
[ Post_processing|postraitement corps_postraitement]  
[ Post_processings|postraitements post_processings]  
[ liste_de_postraitements liste_post_ok]  
[ liste_postraitements liste_post]  
[ sauvegarde format_file]  
[ sauvegarde_simple format_file]  
[ reprise format_file]  
[ resume_last_time format_file]
```

}
where

- **Conduction** *conduction* (5.1): Heat equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.2 corps_postraitement

Description: not_set

See also: post_processing (4.4.3)

Usage:

```
{
    [ definition_champs definition_champs]
    [ Probes|sondes sondes]
    [ domaine str]
    [ format str into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med', 'med_major']]
    [ parallele str into ['simple', 'multiple', 'mpi-io']]
    [ fields|champs champs_posts]
    [ statistiques stats_posts]
    [ fichier str]
    [ statistiques_en_serie stats_serie_posts]
    [ interfaces champs_posts]
}
```

where

- **definition_champs** *definition_champs* (4.2.1) for inheritance: Keyword to create new or more complex field for advanced postprocessing.

- **Probes|sondes** *sondes* (4.2.3) for inheritance: Probe.
- **domaine** *str* for inheritance: This optional parameter specifies the domain on which the data should be interpolated before it is written in the output file. The default is to write the data on the domain of the current problem (no interpolation).
- **format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med', 'med_major'] for inheritance: This optional parameter specifies the format of the output file. The basename used for the output file is the basename of the data file. For the fmt parameter, choices are lml or lata. A short description of each format can be found below. The default value is lml.
- **parallele** *str* into ['simple', 'multiple', 'mpi-io'] for inheritance: Select simple (single file, sequential write), multiple (several files, parallel write), or mpi-io (single file, parallel write) for LATA format
- **fields|champs** *champs_posts* (4.2.20) for inheritance: Field's write mode.
- **statistiques** *stats_posts* (4.2.23) for inheritance: Statistics between two points fixed : start of integration time and end of integration time.
- **fichier** *str* for inheritance: Name of file.
- **statistiques_en_serie** *stats_serie_posts* (4.2.31) for inheritance: Statistics between two points not fixed : on period of integration.
- **interfaces** *champs_posts* (4.2.20) for inheritance: Keyword to read all the characteristics of the interfaces. Different kind of interfaces exist as well as different interface initialisations.

4.2.1 definition_champs

Description: List of definition champ

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *definition_champ* (4.2.2)

4.2.2 definition_champ

Description: Keyword to create new complex field for advanced postprocessing.

See also: objet_lecture (36)

Usage:

name **champ_generique**

where

- **name** *str*: The name of the new created field.
- **champ_generique** *champ_generique_base* (8)

4.2.3 sondes

Description: List of probes.

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *sonde* (4.2.4)

4.2.4 sonde

Description: Keyword is used to define the probes. Observations: the probe coordinates should be given in Cartesian coordinates (X, Y, Z), including axisymmetric.

See also: [objet_lecture \(36\)](#)

Usage:

nom_sonde [**special**] **nom_inco mperiode prd type**

where

- **nom_sonde** *str*: Name of the file in which the values taken over time will be saved. The complete file name is `nom_sonde.son`.
- **special** *str into* [*'grav'*, *'som'*, *'nodes'*, *'chsom'*, *'gravcl'*]: Option to change the positions of the probes. Several options are available:
 - grav* : each probe is moved to the nearest cell center of the mesh;
 - som* : each probe is moved to the nearest vertex of the mesh
 - nodes* : each probe is moved to the nearest face center of the mesh;
 - chsom* : only available for PINC sampled field. The values of the probes are calculated according to P1-Conform corresponding field.
 - gravcl* : Extend to the domain face boundary a cell-located segment probe in order to have the boundary condition for the field. For this type the extreme probe point has to be on the face center of gravity.
- **nom_inco** *str*: Name of the sampled field.
- **mperiode** *str into* [*'periode'*]: Keyword to set the sampled field measurement frequency.
- **prd** *float*: Period value. Every *prd* seconds, the field value calculated at the previous time step is written to the `nom_sonde.son` file.
- **type** *sonde_base* (4.2.5): Type of probe.

4.2.5 sonde_base

Description: Basic probe. Probes refer to sensors that allow a value or several points of the domain to be monitored over time. The probes may be a set of points defined one by one (keyword `Points`) or a set of points evenly distributed over a straight segment (keyword `Segment`) or arranged according to a layout (keyword `Plan`) or according to a parallelepiped (keyword `Volume`). The fields allow all the values of a physical value on the domain to be known at several moments in time.

See also: [objet_lecture \(36\)](#) [points \(4.2.6\)](#) [numero_elem_sur_maitre \(4.2.10\)](#) [position_like \(4.2.11\)](#) [segment \(4.2.12\)](#) [plan \(4.2.13\)](#) [volume \(4.2.14\)](#) [circle \(4.2.15\)](#) [circle_3 \(4.2.16\)](#) [segmentfacesx \(4.2.17\)](#) [segmentfacesy \(4.2.18\)](#) [segmentfacesz \(4.2.19\)](#)

Usage:

sonde_base

4.2.6 points

Description: Keyword to define the number of probe points. The file is arranged in columns.

See also: [sonde_base \(4.2.5\)](#) [point \(4.2.8\)](#) [segmentpoints \(4.2.9\)](#)

Usage:

points points

where

- **points** *listpoints* (4.2.7): Probe points.

4.2.7 listpoints

Description: Points.

See also: listobj ([35.3](#))

Usage:

n object1 object2

list of *un_point* ([3.18.3](#))

4.2.8 point

Description: Point as class-daughter of Points.

See also: points ([4.2.6](#))

Usage:

point points

where

- **points** *listpoints* ([4.2.7](#)): Probe points.

4.2.9 segmentpoints

Description: This keyword is used to define a probe segment from specifics points. The nom_champ field is sampled at ns specifics points.

See also: points ([4.2.6](#))

Usage:

segmentpoints points

where

- **points** *listpoints* ([4.2.7](#)): Probe points.

4.2.10 numero_elem_sur_maitre

Description: Keyword to define a probe at the special element. Useful for min/max sonde.

See also: sonde_base ([4.2.5](#))

Usage:

numero_elem_sur_maitre numero

where

- **numero** *int*: element number

4.2.11 position_like

Description: Keyword to define a probe at the same position of another probe named autre_sonde.

See also: sonde_base ([4.2.5](#))

Usage:

position_like **autre_sonde**

where

- **autre_sonde** *str*: Name of the other probe.

4.2.12 segment

Description: Keyword to define the number of probe segment points. The file is arranged in columns.

See also: **sonde_base** ([4.2.5](#))

Usage:

segment **nbr** **point_deb** **point_fin**

where

- **nbr** *int*: Number of probe points of the segment, evenly distributed.
- **point_deb** *un_point* ([3.18.3](#)): First outer probe segment point.
- **point_fin** *un_point* ([3.18.3](#)): Second outer probe segment point.

4.2.13 plan

Description: Keyword to set the number of probe layout points. The file format is type .lml

See also: **sonde_base** ([4.2.5](#))

Usage:

plan **nbr** **nbr2** **point_deb** **point_fin** **point_fin_2**

where

- **nbr** *int*: Number of probes in the first direction.
- **nbr2** *int*: Number of probes in the second direction.
- **point_deb** *un_point* ([3.18.3](#)): First point defining the angle. This angle should be positive.
- **point_fin** *un_point* ([3.18.3](#)): Second point defining the angle. This angle should be positive.
- **point_fin_2** *un_point* ([3.18.3](#)): Third point defining the angle. This angle should be positive.

4.2.14 volume

Description: Keyword to define the probe volume in a parallelepiped passing through 4 points and the number of probes in each direction.

See also: **sonde_base** ([4.2.5](#))

Usage:

volume **nbr** **nbr2** **nbr3** **point_deb** **point_fin** **point_fin_2** **point_fin_3**

where

- **nbr** *int*: Number of probes in the first direction.
- **nbr2** *int*: Number of probes in the second direction.
- **nbr3** *int*: Number of probes in the third direction.
- **point_deb** *un_point* ([3.18.3](#)): Point of origin.
- **point_fin** *un_point* ([3.18.3](#)): Point defining the first direction (from point of origin).
- **point_fin_2** *un_point* ([3.18.3](#)): Point defining the second direction (from point of origin).
- **point_fin_3** *un_point* ([3.18.3](#)): Point defining the third direction (from point of origin).

4.2.15 circle

Description: Keyword to define several probes located on a circle.

See also: sonde_base ([4.2.5](#))

Usage:

circle **nbr** **point_deb** [**direction**] **radius** **theta1** **theta2**

where

- **nbr** *int*: Number of probes between teta1 and teta2 (angles given in degrees).
- **point_deb** *un_point* ([3.18.3](#)): Center of the circle.
- **direction** *int into [0, 1, 2]*: Axis normal to the circle plane (0:x axis, 1:y axis, 2:z axis).
- **radius** *float*: Radius of the circle.
- **theta1** *float*: First angle.
- **theta2** *float*: Second angle.

4.2.16 circle_3

Description: Keyword to define several probes located on a circle (in 3-D space).

See also: sonde_base ([4.2.5](#))

Usage:

circle_3 **nbr** **point_deb** **direction** **radius** **theta1** **theta2**

where

- **nbr** *int*: Number of probes between teta1 and teta2 (angles given in degrees).
- **point_deb** *un_point* ([3.18.3](#)): Center of the circle.
- **direction** *int into [0, 1, 2]*: Axis normal to the circle plane (0:x axis, 1:y axis, 2:z axis).
- **radius** *float*: Radius of the circle.
- **theta1** *float*: First angle.
- **theta2** *float*: Second angle.

4.2.17 segmentfacesx

Description: Segment probe where points are moved to the nearest x faces

See also: sonde_base ([4.2.5](#))

Usage:

segmentfacesx **nbr** **point_deb** **point_fin**

where

- **nbr** *int*: Number of probe points of the segment, evenly distributed.
- **point_deb** *un_point* ([3.18.3](#)): First outer probe segment point.
- **point_fin** *un_point* ([3.18.3](#)): Second outer probe segment point.

4.2.18 segmentfacesy

Description: Segment probe where points are moved to the nearest y faces

See also: sonde_base ([4.2.5](#))

Usage:

segmentfacesy nbr point_deb point_fin

where

- **nbr** *int*: Number of probe points of the segment, evenly distributed.
- **point_deb** *un_point* (3.18.3): First outer probe segment point.
- **point_fin** *un_point* (3.18.3): Second outer probe segment point.

4.2.19 segmentfacesz

Description: Segment probe where points are moved to the nearest z faces

See also: sonde_base (4.2.5)

Usage:

segmentfacesz nbr point_deb point_fin

where

- **nbr** *int*: Number of probe points of the segment, evenly distributed.
- **point_deb** *un_point* (3.18.3): First outer probe segment point.
- **point_fin** *un_point* (3.18.3): Second outer probe segment point.

4.2.20 champs_posts

Description: Field's write mode.

See also: objet_lecture (36)

Usage:

[format] mot period fields|champs

where

- **format** *str into* ['binaire', 'formatte']: Type of file.
- **mot** *str into* ['dt_post', 'nb_pas_dt_post']: Keyword to set the kind of the field's write frequency. Either a time period or a time step period.
- **period** *str*: Value of the period which can be like (2.*t).
- **fields|champs** *champs_a_post* (4.2.21): Post-processed fields.

4.2.21 champs_a_post

Description: Fields to be post-processed.

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *champ_a_post* (4.2.22)

4.2.22 champ_a_post

Description: Field to be post-processed.

See also: objet_lecture (36)

Usage:

champ [**localisation**]

where

- **champ** *str*: Name of the post-processed field.
- **localisation** *str* into [*'elem'*, *'som'*, *'faces'*]: Localisation of post-processed field values: The two available values are elem, som, or faces (LATA format only) used respectively to select field values at mesh centres (CHAMPMAILLE type field in the lml file) or at mesh nodes (CHAMPPPOINT type field in the lml file). If no selection is made, localisation is set to som by default.

4.2.23 stats_posts

Description: Field's write mode.

Dt_post: This keyword is used to set the calculated statistics write period.

dts: frequency value.

t_deb value: Start of integration time

t_fin value: End of integration time

stat: Set to **Moyenne (average)** to calculate the average of the field *nom_champ* (field name) over time or **Ecart_type (std_deviation)** to calculate the standard deviation (statistic rms) of the field *nom_champ* (*field_name*) or **Correlation** to calculate the correlation between the two fields *nom_champ* and *second_nom_champ*.

nom_champ: name of the field on which statistical analysis will be performed. Possible keywords are **Vitesse (velocity)**, **Pression (pressure)**, **Temperature**, **Concentration**,...

localisation: localisation of post-processed field values (**elem** or **som**).

Example:

```
Statistiques Dt_post dtst {  
    t_deb 0.1 t_fin 0.12  
    Moyenne Pression  
    Ecart_type Pression  
    Correlation Vitesse Vitesse }  
It will write every dt_post the mean, standard deviation and correlation value:
```

$t \leq t_{deb}$:

average: $\overline{P(t)} = 0$

std_deviation: $\langle P(t) \rangle = 0$

correlation: $\langle U(t).V(t) \rangle = 0$

$t > t_{deb}$:

average: $\overline{P(t)} = \frac{1}{t-t_{deb}} \int_{t_{deb}}^t P(t) dt$

std_deviation: $\langle P(t) \rangle = \sqrt{\frac{1}{t-t_{deb}} \int_{t_{deb}}^t [P(t) - \overline{P(t)}]^2 dt}$

correlation: $\langle U(t).V(t) \rangle = \frac{1}{t-t_{deb}} \int_{t_{deb}}^t [U(t) - \overline{U(t)}] \cdot [V(t) - \overline{V(t)}] dt$

See also: [objet_lecture \(36\)](#)

Usage:

mot period fields|champs

where

- **mot** *str* into ['dt_post', 'nb_pas_dt_post']: Keyword to set the kind of the field's write frequency. Either a time period or a time step period.
- **period** *str*: Value of the period which can be like (2.*t).
- **fields|champs** *list_stat_post* (4.2.24): Post-processed fields.

4.2.24 list_stat_post

Description: Post-processing for statistics

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *stat_post_deriv* (4.2.25)

4.2.25 stat_post_deriv

Description: not_set

See also: objet_lecture (36) t_deb (4.2.26) t_fin (4.2.27) moyenne (4.2.28) ecart_type (4.2.29) correlation (4.2.30)

Usage:

stat_post_deriv

4.2.26 t_deb

Description: not_set

See also: stat_post_deriv (4.2.25)

Usage:

t_deb val

where

- **val** *float*

4.2.27 t_fin

Description: not_set

See also: stat_post_deriv (4.2.25)

Usage:

t_fin val

where

- **val** *float*

4.2.28 moyenne

Synonymous: **champ_post_statistiques_moyenne**

Description: not_set

See also: stat_post_deriv ([4.2.25](#))

Usage:

moyenne field [localisation]

where

- **field** *str*
- **localisation** *str* into [*'elem'*, *'som'*, *'faces'*]: Localisation of post-processed field value

4.2.29 ecart_type

Synonymous: **champ_post_statistiques_ecart_type**

Description: not_set

See also: stat_post_deriv ([4.2.25](#))

Usage:

ecart_type field [localisation]

where

- **field** *str*
- **localisation** *str* into [*'elem'*, *'som'*, *'faces'*]: Localisation of post-processed field value

4.2.30 correlation

Synonymous: **champ_post_statistiques_correlation**

Description: not_set

See also: stat_post_deriv ([4.2.25](#))

Usage:

correlation first_field second_field [localisation]

where

- **first_field** *str*
- **second_field** *str*
- **localisation** *str* into [*'elem'*, *'som'*, *'faces'*]: Localisation of post-processed field value

4.2.31 stats_serie_posts

Description: Post-processing for statistics.

Statistiques_en_serie: This keyword is used to set the statistics. Average on **dt_integr** time interval is post-processed every **dt_integr** seconds

dt_integr value : Period of integration and write period.

stat: Set to **Moyenne (average)** to calculate the average of the field *nom_champ* (field name) over time or **Ecart_type (std_deviation)** to calculate the standard deviation (statistic rms) of the field *nom_champ* (*field_name*).

nom_champ: name of the field on which statistical analysis will be performed. Possible keywords are **Vitesse (velocity)**, **Pression (pressure)**, **Temperature**, **Concentration**,...

localisation: localisation of post-processed field values (**elem** or **som**).

Example:

```
Statistiques_en_serie Dt_integr dtst {
Moyenne Pression
}
```

Will calculate and write every dtst seconds the mean value:

$$(n + 1)dt_integr > t > n * dt_integr, \overline{P(t)} = \frac{1}{t - n * dt_integr} \int_{t_n * dt_integr}^t P(t)dt$$

See also: [objet_lecture \(36\)](#)

Usage:

mot dt_integr stat
where

- **mot** *str* into [*'dt_integr'*]: Keyword is used to set the statistics period of integration and write period.
- **dt_integr** *float*: Average on dt_integr time interval is post-processed every dt_integr seconds.
- **stat** *list_stat_post* ([4.2.24](#))

4.3 post_processings

Synonymous: **postraitements**

Description: Keyword to use several results files. List of objects of post-processing (with name).

See also: [listobj \(35.3\)](#)

Usage:

{ object1 object2 }
list of *un_postraitement* ([4.3.1](#))

4.3.1 un_postraitement

Description: An object of post-processing (with name).

See also: [objet_lecture \(36\)](#)

Usage:

nom post
where

- **nom** *str*: Name of the post-processing.
- **post** *corps_postraitement* ([4.2](#)): Definition of the post-processing.

4.4 liste_post_ok

Description: Keyword to use several results files. List of objects of post-processing (with name)

See also: listobj ([35.3](#))

Usage:

{ object1 object2 }

list of *nom_postraitement* ([4.4.1](#))

4.4.1 nom_postraitement

Description:

See also: objet_lecture ([36](#))

Usage:

nom post

where

- **nom** *str*: Name of the post-processing.
- **post** *postraitement_base* ([4.4.2](#)): the post

4.4.2 postraitement_base

Description: not_set

See also: objet_lecture ([36](#)) post_processing ([4.4.3](#)) postraitement_ft_lata ([4.4.4](#))

Usage:

4.4.3 post_processing

Synonymous: **postraitement**

Description: An object of post-processing (without name).

See also: postraitement_base ([4.4.2](#)) corps_postraitement ([4.2](#))

Usage:

post_processing {

[**definition_champs** *definition_champs*]

[**Probes|sondes** *sondes*]

[**domaine** *str*]

[**format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med', 'med_major']]

[**parallele** *str* into ['simple', 'multiple', 'mpi-io']]

[**fields|champs** *champs_posts*]

[**statistiques** *stats_posts*]

[**fichier** *str*]

[**statistiques_en_serie** *stats_serie_posts*]

[**interfaces** *champs_posts*]

}

where

- **definition_champs** *definition_champs* (4.2.1): Keyword to create new or more complex field for advanced postprocessing.
- **Probes/sondes** *sondes* (4.2.3): Probe.
- **domaine** *str*: This optional parameter specifies the domain on which the data should be interpolated before it is written in the output file. The default is to write the data on the domain of the current problem (no interpolation).
- **format** *str* into ['lml', 'lata', 'lata_v1', 'lata_v2', 'med', 'med_major']: This optional parameter specifies the format of the output file. The basename used for the output file is the basename of the data file. For the fmt parameter, choices are lml or lata. A short description of each format can be found below. The default value is lml.
- **parallele** *str* into ['simple', 'multiple', 'mpi-io']: Select simple (single file, sequential write), multiple (several files, parallel write), or mpi-io (single file, parallel write) for LATA format
- **fields/champs** *champs_posts* (4.2.20): Field's write mode.
- **statistiques** *stats_posts* (4.2.23): Statistics between two points fixed : start of integration time and end of integration time.
- **fichier** *str*: Name of file.
- **statistiques_en_serie** *stats_serie_posts* (4.2.31): Statistics between two points not fixed : on period of integration.
- **interfaces** *champs_posts* (4.2.20): Keyword to read all the characteristics of the interfaces. Different kind of interfaces exist as well as different interface initialisations.

4.4.4 postraitement_ft_lata

Description: not_set

See also: postraitement_base (4.4.2)

Usage:

postraitement_ft_lata **bloc**

where

- **bloc** *str*

4.5 liste_post

Description: Keyword to use several results files. List of objects of post-processing (with name)

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *un_postraitement_spec* (4.5.1)

4.5.1 un_postraitement_spec

Description: An object of post-processing (with type +name).

See also: objet_lecture (36)

Usage:

[**type_un_post**] [**type_postraitement_ft_lata**]

where

- **type_un_post** *type_un_post* (4.5.2)
- **type_postraitement_ft_lata** *type_postraitement_ft_lata* (4.5.3)

4.5.2 type_un_post

Description: not_set

See also: objet_lecture (36)

Usage:

type post

where

- **type** *str* into ['postraitement', 'post_processing']
- **post** *un_postraitement* (4.3.1)

4.5.3 type_postraitement_ft_lata

Description: not_set

See also: objet_lecture (36)

Usage:

type nom bloc

where

- **type** *str* into ['postraitement_ft_lata', 'postraitement_lata']
- **nom** *str*: Name of the post-processing.
- **bloc** *str*

4.6 format_file

Description: File formatted.

See also: objet_lecture (36)

Usage:

[**format**] **name_file**

where

- **format** *str* into ['binaire', 'formatte', 'xyz', 'single_hdf']: Type of file (the file format).
- **name_file** *str*: Name of file.

4.7 Pb_Hydraulique_Turbulent_ALE

Description: Resolution of hydraulic turbulent problems for ALE

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

Pb_Hydraulique_Turbulent_ALE obj Lire obj {

```
Navier_Stokes_Turbulent_ALE navier_stokes_turbulent_ale
[ Post_processing|postraitement corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
```

```

[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **Navier_Stokes_Turbulent_ALE** *navier_stokes_turbulent_ale* (5.11): Navier-Stokes_ALE equations as well as the associated turbulence model equations on mobile domain (ALE)
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.8 Pb_Hydraulique_sensibility

Description: Resolution of hydraulic sensibility problems

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

Pb_Hydraulique_sensibility obj Lire obj {

```

Navier_Stokes_standard_sensibility navier_stokes_standard_sensibility
[ Post_processing|postraitement corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
[ sauvegarde format_file]
[ sauvegarde_simple format_file]

```

```

[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **Navier_Stokes_standard_sensibility** *navier_stokes_standard_sensibility* (5.13): Navier-Stokes sensibility equations
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.9 Pb_Thermohydraulique_sensibility

Description: Resolution of Resolution of thermohydraulic sensitivity problem

Keyword Discretize should have already been used to read the object.

See also: pb_thermohydraulique (4.30)

Usage:

Pb_Thermohydraulique_sensibility obj Lire obj {

```

  Convection_Diffusion_Temperature_Sensibility convection_diffusion_temperature_sensibility
  Navier_Stokes_standard_sensibility navier_stokes_standard_sensibility
  [ navier_stokes_standard navier_stokes_standard]
  [ Post_processing|postraitement corps_postraitement]
  [ Post_processings|postraitements post_processings]
  [ liste_de_postraitements liste_post_ok]
  [ liste_postraitements liste_post]
  [ sauvegarde format_file]
  [ sauvegarde_simple format_file]

```

```

[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **Convection_Diffusion_Temperature_Sensibility** *convection_diffusion_temperature_sensibility* (5.9): Convection diffusion temperature sensitivity equation
- **Navier_Stokes_standard_sensibility** *navier_stokes_standard_sensibility* (5.13): Navier Stokes sensitivity equation
- **navier_stokes_standard** *navier_stokes_standard* (5.40) for inheritance: Navier-Stokes equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processing|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.10 Pb_base

Description: Resolution of equations on a domain. A problem is defined by creating an object and assigning the problem type that the user wishes to resolve. To enter values for the problem objects created, the Lire (Read) interpreter is used with a data block.

Keyword Discretize should have already been used to read the object.

See also: pb_gen_base (4) pb_thermohydraulique (4.30) pb_hydraulique (4.18) pb_thermohydraulique_qc (4.35) pb_hydraulique_melange_binaire_qc (4.24) pb_hydraulique_concentration (4.20) pb_thermohydraulique_concentration (4.31) pb_avec_passif (4.15) pb_post (4.29) problem_read_generic (4.44) Pb_Conduction (4.1) pb_hydraulique_turbulent (4.26) pb_thermohydraulique_turbulent (4.38) pb_hydraulique_concentration_turbulent (4.22) pb_thermohydraulique_concentration_turbulent (4.33) pb_thermohydraulique_turbulent_qc (4.39) pb_phase_field (4.28) modele_rayo_semi_transp (4.13) Pb_Hydraulique_sensibility (4.8) pb_hydraulique_ALE (4.19) pb_hydraulique_melange_binaire_turbulent_qc (4.25) Pb_Hydraulique_Turbulent_ALE (4.7)

Usage:

```
Pb_base obj Lire obj {  
    [ Post_processing|postraitement corps_postraitement]  
    [ Post_processings|postraitements post_processings]  
    [ liste_de_postraitements liste_post_ok]  
    [ liste_postraitements liste_post]  
    [ sauvegarde format_file]  
    [ sauvegarde_simple format_file]  
    [ reprise format_file]  
    [ resume_last_time format_file]  
}
```

where

- **Post_processing|postraitement** *corps_postraitement* (4.2): One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3): List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4): This
- **liste_postraitements** *liste_post* (4.5): This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6): Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6): The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6): Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6): Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.11 probleme_couple

Description: This instruction causes a probleme_couple type object to be created. This type of object has an associated problem list, that is, the coupling of n problems among them may be processed. Coupling between these problems is carried out explicitly via conditions at particular contact limits. Each problem may be associated either with the Associate keyword or with the Read/groupes keywords. The difference is that in the first case, the four problems exchange values then calculate their timestep, rather in the second case, the same strategy is used for all the problems listed inside one group, but the second group of problem exchange values with the first group of problems after the first group did its timestep. So, the first case may then also be written like this:

Probleme_Couple pbc

Read pbc { groupes { { pb1 , pb2 , pb3 , pb4 } } }

There is a physical environment per problem (however, the same physical environment could be common to several problems).

Each problem is resolved in a domain.

Warning : Presently, coupling requires coincident meshes. In case of non-coincident meshes, boundary condition 'paroi_contact' in VEF returns error message (see paroi_contact for correcting procedure).

See also: pb_gen_base (4) pb_couple_rayonnement (4.45) pb_couple_rayo_semi_transp (4.17)

Usage:

probleme_couple obj Lire obj {

 [**groupes** *list_list_nom*]

}

where

- **groupes** *list_list_nom* (4.12): { groupes { { pb1 , pb2 } , { pb3 , pb4 } } }

4.12 list_list_nom

Description: pour les groupes

See also: listobj (35.3)

Usage:

{ object1 , object2 }

list of *list_un_pb* (35.1) separated with ,

4.13 modele_rayo_semi_transp

Description: Radiation model for semi transparent gas. The model should be associated to the coupling problem BEFORE the time scheme.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

modele_rayo_semi_transp obj Lire obj {

 [**eq_rayo_semi_transp** *eq_rayo_semi_transp*]

 [**Post_processing|postraitement** *corps_postraitement*]

 [**Post_processings|postraitements** *post_processings*]

 [**liste_de_postraitements** *liste_post_ok*]

 [**liste_postraitements** *liste_post*]

 [**sauvegarde** *format_file*]

 [**sauvegarde_simple** *format_file*]

 [**reprise** *format_file*]

 [**resume_last_time** *format_file*]

}

where

- **eq_rayo_semi_transp** *eq_rayo_semi_transp* (4.14): Irradiancy G equation. Radiative flux equals $-\text{grad}(G)/3/kappa$.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).

- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.14 eq_rayo_semi_transp

Description: Irradiancy equation.

See also: objet_lecture (36)

Usage:

```
{
    solveur solveur_sys_base
    [ boundary_conditions|conditions_limites condlims]
```

}
where

- **solveur** *solveur_sys_base* (10.17): Solver of the irradiancy equation.
- **boundary_conditions|conditions_limites condlims** (4.14.1): Boundary conditions.

4.14.1 condlims

Description: Boundary conditions.

See also: listobj (35.3)

Usage:

```
{ object1 object2 .... }
list of condlimlu (4.14.2)
```

4.14.2 condlimlu

Description: Boundary condition specified.

See also: `objet_lecture` (36)

Usage:

bord cl
where

- **bord** *str*: Name of the edge where the boundary condition applies.
- **cl** *condlim_base* (12): Boundary condition at the boundary called bord (edge).

4.15 pb_avec_passif

Description: Class to create a classical problem with a scalar transport equation (e.g: temperature or concentration) and an additional set of passive scalars (e.g: temperature or concentration) equations.

Keyword Discretize should have already been used to read the object.

See also: `Pb_base` (4.10) `pb_thermohydraulique_concentration_scalaires_passifs` (4.32) `pb_thermohydraulique_scalaires_passifs` (4.37) `pb_hydraulique_concentration_scalaires_passifs` (4.21) `pb_thermohydraulique_qc_fraction_massique` (4.36) `pb_thermohydraulique_concentration_turbulent_scalaires_passifs` (4.34) `pb_thermohydraulique_turbulent_scalaires_passifs` (4.41) `pb_hydraulique_concentration_turbulent_scalaires_passifs` (4.23) `pb_thermohydraulique_turbulent_qc_fraction_massique` (4.40)

Usage:

```
pb_avec_passif obj Lire obj {  
    equations_scalaires_passifs listeqn  
    [ Post_processing|postraitement corps_postraitement]  
    [ Post_processings|postraitements post_processings]  
    [ liste_de_postraitements liste_post_ok]  
    [ liste_postraitements liste_post]  
    [ sauvegarde format_file]  
    [ sauvegarde_simple format_file]  
    [ reprise format_file]  
    [ resume_last_time format_file]  
}
```

where

- **equations_scalaires_passifs** *listeqn* (4.16): Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction_massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for

each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.

- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.16 listeqn

Description: List of equations.

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *eqn_base* (5.33)

4.17 pb_couple_rayo_semi_transp

Description: Problem coupling several other problems to which radiation coupling is added (for semi transparent gas).

You have to associate a modele_rayo_semi_transp

You have to add a radiative term source in energy equation

Warning: Calculation with semi transparent gas model may lead to divergence when high temperature differences are used. Indeed, the calculation of the stability time step of the equation does not take in account the source term. In semi transparent gas model, energy equation source term depends strongly of temperature via irradiance and stability is not guaranteed by the calculated time step. Reducing the facsec of the time scheme is a good tip to reach convergence when divergence is encountered.

See also: probleme_couple (4.11)

Usage:

pb_couple_rayo_semi_transp obj Lire obj {

[**groupes** *list_list_nom*]

}

where

- **groupes** *list_list_nom* (4.12) for inheritance: { groupes { { pb1 , pb2 } , { pb3 , pb4 } } }

4.18 pb_hydraulique

Description: Resolution of the Navier-Stokes equations.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_hydraulique obj Lire obj {  
    navier_stokes_standard navier_stokes_standard  
    [ Post_processing|postraitement corps_postraitement ]  
    [ Post_processings|postraitements post_processings ]  
    [ liste_de_postraitements liste_post_ok ]  
    [ liste_postraitements liste_post ]  
    [ sauvegarde format_file ]  
    [ sauvegarde_simple format_file ]  
    [ reprise format_file ]  
    [ resume_last_time format_file ]  
}
```

where

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.19 pb_hydraulique_ALE

Description: Resolution of hydraulic problems for ALE

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_hydraulique_ALE obj Lire obj {
```

```

navier_stokes_standard_ALE navier_stokes_standard
[ Post_processing|postraitement corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]

```

}

where

- **navier_stokes_standard_ALE** *navier_stokes_standard* (5.40): Navier-Stokes equations for ALE problems
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.20 pb_hydraulique_concentration

Description: Resolution of Navier-Stokes/multiple constituent transport equations.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

pb_hydraulique_concentration obj Lire obj {

```

[ navier_stokes_standard navier_stokes_standard]
[ convection_diffusion_concentration convection_diffusion_concentration]

```

```

[ Post_processing|postraitement corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_concentration** *convection_diffusion_concentration* (5.21): Constituent transport vectorial equation (concentration diffusion convection).
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N (N<>P) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.21 pb_hydraulique_concentration_scalaires_passifs

Description: Resolution of Navier-Stokes/multiple constituent transport equations with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```

pb_hydraulique_concentration_scalaires_passifs obj Lire obj {
    [ navier_stokes_standard navier_stokes_standard]

```

```

[ convection_diffusion_concentration convection_diffusion_concentration]
equations_scalaires_passifs listeqn
[ Post_processing|postraitement corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_concentration** *convection_diffusion_concentration* (5.21): Constituent transport equations (concentration diffusion convection).
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction-massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.22 pb_hydraulique_concentration_turbulent

Description: Resolution of Navier-Stokes/multiple constituent transport equations, with turbulence modelling.

Keyword Discretize should have already been used to read the object.
See also: Pb_base (4.10)

Usage:

```
pb_hydraulique_concentration_turbulent obj Lire obj {
    [ navier_stokes_turbulent navier_stokes_turbulent]
    [ convection_diffusion_concentration_turbulent convection_diffusion_concentration_turbulent]
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_concentration_turbulent** *convection_diffusion_concentration_turbulent* (5.23): Constituent transport equations (concentration diffusion convection) as well as the associated turbulence model equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.23 pb_hydraulique_concentration_turbulent_scalaires_passifs

Description: Resolution of Navier-Stokes/multiple constituent transport equations, with turbulence modelling and with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_hydraulique_concentration_turbulent_scalaires_passifs obj Lire obj {  
    [ navier_stokes_turbulent navier_stokes_turbulent]  
    [ convection_diffusion_concentration_turbulent convection_diffusion_concentration_turbulent]  
    equations_scalaires_passifs listeqn  
    [ Post_processing|postraitement corps_postraitement]  
    [ Post_processings|postraitements post_processings]  
    [ liste_de_postraitements liste_post_ok]  
    [ liste_postraitements liste_post]  
    [ sauvegarde format_file]  
    [ sauvegarde_simple format_file]  
    [ reprise format_file]  
    [ resume_last_time format_file]  
}
```

where

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_concentration_turbulent** *convection_diffusion_concentration_turbulent* (5.23): Constituent transport equations (concentration diffusion convection) as well as the associated turbulence model equations.
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction_masseN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on

P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.

- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.24 pb_hydraulique_melange_binaire_qc

Description: Resolution of a binary mixture problem under low Mach number and iso-thermal conditions.

Keywords for the unknowns other than pressure, velocity, fraction_massique are :

masse_volumique : density

pression : reduced pressure

pression_tot : total pressure.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

pb_hydraulique_melange_binaire_qc obj Lire obj {

```

    navier_stokes_qc navier_stokes_qc
    convection_diffusion_fraction_massique_mb_qc convection_diffusion_fraction_massique_mb-
    _qc
    [ Post_processing|postraitement corps_postraitement ]
    [ Post_processings|postraitements post_processings ]
    [ liste_de_postraitements liste_post_ok ]
    [ liste_postraitements liste_post ]
    [ sauvegarde format_file ]
    [ sauvegarde_simple format_file ]
    [ reprise format_file ]
    [ resume_last_time format_file ]

```

}

where

- **navier_stokes_qc** *navier_stokes_qc* (5.39): Navier-Stokes equations under low Mach number.
- **convection_diffusion_fraction_massique_mb_qc** *convection_diffusion_fraction_massique_mb_qc* (5.24): Species conservation equation under low Mach number.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.

- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.25 pb_hydraulique_melange_binaire_turbulent_qc

Description: Resolution of turbulent binary mixture problem under low Mach number.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_hydraulique_melange_binaire_turbulent_qc obj Lire obj {
    navier_stokes_turbulent_qc navier_stokes_turbulent_qc
    convection_diffusion_fraction_massique_mb_turbulent_qc convection_diffusion_fraction_massique-
    _mb_turbulent_qc
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_turbulent_qc** *navier_stokes_turbulent_qc* (5.42): Navier-Stokes equations under low Mach number as well as the associated turbulence model equations.
- **convection_diffusion_fraction_massique_mb_turbulent_qc** *convection_diffusion_fraction_massique-_mb_turbulent_qc* (5.25): Species conservation equation under low Mach number as well as the associated turbulence model equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.

- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the *name_file* file (see the class *format_file*). If *format_reprise* is xyz, the *name_file* file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the *tinit* (see *schema_temps_base*) time fields are taken from the *name_file* file. If there is no backup corresponding to this time in the *name_file*, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the *name_file* file, resume the calculation at the last time found in the file (*tinit* is set to last time of saved files).

4.26 pb_hydraulique_turbulent

Description: Resolution of Navier-Stokes equations with turbulence modelling.

Keyword Discretize should have already been used to read the object.

See also: *Pb_base* (4.10)

Usage:

```
pb_hydraulique_turbulent obj Lire obj {
    navier_stokes_turbulent navier_stokes_turbulent
    [ Post_processing|postraitement corps_postraitement ]
    [ Post_processings|postraitements post_processings ]
    [ liste_de_postraitements liste_post_ok ]
    [ liste_postraitements liste_post ]
    [ sauvegarde format_file ]
    [ sauvegarde_simple format_file ]
    [ reprise format_file ]
    [ resume_last_time format_file ]
}
```

where

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for

each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.

- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.27 pb_mg

Description: Multi-grid problem.

Keyword Discretize should have already been used to read the object.

See also: pb_gen_base (4)

Usage:

pb_mg

4.28 pb_phase_field

Description: Problem to solve local instantaneous incompressible-two-phase-flows. Complete description of the Phase Field model for incompressible and immiscible fluids can be found into this PDF: TRUST-ROOT/doc/TRUST/phase_field_non_miscible_manuel.pdf

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

pb_phase_field obj Lire obj {

```
[ navier_stokes_phase_field  navier_stokes_phase_field]
[ convection_diffusion_phase_field  convection_diffusion_phase_field]
[ Post_processing|postraitement  corps_postraitement]
[ Post_processings|postraitements  post_processings]
[ liste_de_postraitements  liste_post_ok]
[ liste_postraitements  liste_post]
[ sauvegarde  format_file]
[ sauvegarde_simple  format_file]
[ reprise  format_file]
[ resume_last_time  format_file]
```

}

where

- **navier_stokes_phase_field** *navier_stokes_phase_field* (5.36): Navier Stokes equation for the Phase Field problem.

- **convection_diffusion_phase_field** *convection_diffusion_phase_field* (5.28): Cahn-Hilliard equation of the Phase Field problem. The unknown of this equation is the concentration C.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.29 pb_post

Description: not_set

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_post obj Lire obj {
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).

- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.30 pb_thermohydraulique

Description: Resolution of thermohydraulic problem.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10) Pb_Thermohydraulique_sensibility (4.9)

Usage:

```
pb_thermohydraulique obj Lire obj {
    [ navier_stokes_standard navier_stokes_standard]
    [ convection_diffusion_temperature convection_diffusion_temperature]
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
where
```

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_temperature** *convection_diffusion_temperature* (5.29): Energy equation (temperature diffusion convection).
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).

- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.31 pb_thermohydraulique_concentration

Description: Resolution of Navier-Stokes/energy/multiple constituent transport equations.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_thermohydraulique_concentration obj Lire obj {
    [ navier_stokes_standard navier_stokes_standard]
    [ convection_diffusion_concentration convection_diffusion_concentration]
    [ convection_diffusion_temperature convection_diffusion_temperature]
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_concentration** *convection_diffusion_concentration* (5.21): Constituent transport equations (concentration diffusion convection).
- **convection_diffusion_temperature** *convection_diffusion_temperature* (5.29): Energy equation (temperature diffusion convection).

- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.32 pb_thermohydraulique_concentration_scalaires_passifs

Description: Resolution of Navier-Stokes/energy/multiple constituent transport equations, with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_thermohydraulique_concentration_scalaires_passifs obj Lire obj {
    [ navier_stokes_standard navier_stokes_standard]
    [ convection_diffusion_concentration convection_diffusion_concentration]
    [ convection_diffusion_temperature convection_diffusion_temperature]
    equations_scalaires_passifs listeqn
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_concentration** *convection_diffusion_concentration* (5.21): Constituent transport equations (concentration diffusion convection).
- **convection_diffusion_temperature** *convection_diffusion_temperature* (5.29): Energy equations (temperature diffusion convection).
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction-massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.33 pb_thermohydraulique_concentration_turbulent

Description: Resolution of Navier-Stokes/energy/multiple constituent transport equations, with turbulence modelling.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_thermohydraulique_concentration_turbulent obj Lire obj {
    [ navier_stokes_turbulent navier_stokes_turbulent]
    [ convection_diffusion_concentration_turbulent convection_diffusion_concentration_turbulent]
    [ convection_diffusion_temperature_turbulent convection_diffusion_temperature_turbulent]
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
```

```

[ liste_de_postraitements liste_post_ok]
[ liste_postraitements liste_post]
[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_concentration_turbulent** *convection_diffusion_concentration_turbulent* (5.23): Constituent transport equations (concentration diffusion convection) as well as the associated turbulence model equations.
- **convection_diffusion_temperature_turbulent** *convection_diffusion_temperature_turbulent* (5.32): Energy equation (temperature diffusion convection) as well as the associated turbulence model equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N (N<>P) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.34 pb_thermohydraulique_concentration_turbulent_scalaires_passifs

Description: Resolution of Navier-Stokes/energy/multiple constituent transport equations, with turbulence modelling and with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```

pb_thermohydraulique_concentration_turbulent_scalaires_passifs obj Lire obj {
    [ navier_stokes_turbulent  navier_stokes_turbulent]
    [ convection_diffusion_concentration_turbulent  convection_diffusion_concentration_turbulent]
    [ convection_diffusion_temperature_turbulent  convection_diffusion_temperature_turbulent]
    equations_scalaires_passifs  listeqn
    [ Post_processing|postraitement  corps_postraitement]
    [ Post_processings|postraitements  post_processings]
    [ liste_de_postraitements  liste_post_ok]
    [ liste_postraitements  liste_post]
    [ sauvegarde  format_file]
    [ sauvegarde_simple  format_file]
    [ reprise  format_file]
    [ resume_last_time  format_file]
}

```

where

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_concentration_turbulent** *convection_diffusion_concentration_turbulent* (5.23): Constituent transport equations (concentration diffusion convection) as well as the associated turbulence model equations.
- **convection_diffusion_temperature_turbulent** *convection_diffusion_temperature_turbulent* (5.32): Energy equations (temperature diffusion convection) as well as the associated turbulence model equations.
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction_masseN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.

- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.35 pb_thermohydraulique_qc

Description: Resolution of thermohydraulic problem under low Mach number.

Keywords for the unknowns other than pressure, velocity, temperature are :

masse_volumique : density

enthalpie : enthalpy

pression : reduced pressure

pression_tot : total pressure.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_thermohydraulique_qc obj Lire obj {
    navier_stokes_qc navier_stokes_qc
    convection_diffusion_chaleur_qc convection_diffusion_chaleur_qc
    [ Post_processing|postraitement corps_postraitement ]
    [ Post_processings|postraitements post_processings ]
    [ liste_de_postraitements liste_post_ok ]
    [ liste_postraitements liste_post ]
    [ sauvegarde format_file ]
    [ sauvegarde_simple format_file ]
    [ reprise format_file ]
    [ resume_last_time format_file ]
}
```

where

- **navier_stokes_qc** *navier_stokes_qc* (5.39): Navier-Stokes equations under low Mach number.
- **convection_diffusion_chaleur_qc** *convection_diffusion_chaleur_qc* (5.19): Energy equation under low Mach number.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file

created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.

- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.36 pb_thermohydraulique_qc_fraction_massique

Description: Resolution of thermohydraulic problem under low Mach number with passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_thermohydraulique_qc_fraction_massique obj Lire obj {
    navier_stokes_qc navier_stokes_qc
    convection_diffusion_chaleur_qc convection_diffusion_chaleur_qc
    equations_scalaires_passifs listeqn
    [ Post_processing|postraitement corps_postraitement ]
    [ Post_processings|postraitements post_processings ]
    [ liste_de_postraitements liste_post_ok ]
    [ liste_postraitements liste_post ]
    [ sauvegarde format_file ]
    [ sauvegarde_simple format_file ]
    [ reprise format_file ]
    [ resume_last_time format_file ]
}
```

where

- **navier_stokes_qc** *navier_stokes_qc* (5.39): Navier-Stokes equations under low Mach number.
- **convection_diffusion_chaleur_qc** *convection_diffusion_chaleur_qc* (5.19): Energy equation under low Mach number.
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction_massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.

- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.37 pb_thermohydraulique_scalaires_passifs

Description: Resolution of thermohydraulic problem, with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_thermohydraulique_scalaires_passifs obj Lire obj {
    [ navier_stokes_standard navier_stokes_standard]
    [ convection_diffusion_temperature convection_diffusion_temperature]
    equations_scalaires_passifs listeqn
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_standard** *navier_stokes_standard* (5.40): Navier-Stokes equations.
- **convection_diffusion_temperature** *convection_diffusion_temperature* (5.29): Energy equations (temperature diffusion convection).
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction-massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).

- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.38 pb_thermohydraulique_turbulent

Description: Resolution of thermohydraulic problem, with turbulence modelling.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_thermohydraulique_turbulent obj Lire obj {
    navier_stokes_turbulent navier_stokes_turbulent
    convection_diffusion_temperature_turbulent convection_diffusion_temperature_turbulent
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
where
```

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_temperature_turbulent** *convection_diffusion_temperature_turbulent* (5.32): Energy equation (temperature diffusion convection) as well as the associated turbulence model equations.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).

- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N \leq P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.39 pb_thermohydraulique_turbulent_qc

Description: Resolution of turbulent thermohydraulic problem under low Mach number.

Warning : Available for VDF and VEF P0/P1NC discretization only.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10)

Usage:

```
pb_thermohydraulique_turbulent_qc obj Lire obj {
    navier_stokes_turbulent_qc navier_stokes_turbulent_qc
    convection_diffusion_chaleur_turbulent_qc convection_diffusion_chaleur_turbulent_qc
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_turbulent_qc** *navier_stokes_turbulent_qc* (5.42): Navier-Stokes equations under low Mach number as well as the associated turbulence model equations.
- **convection_diffusion_chaleur_turbulent_qc** *convection_diffusion_chaleur_turbulent_qc* (5.20): Energy equation under low Mach number as well as the associated turbulence model equations.

- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.40 pb_thermohydraulique_turbulent_qc_fraction_massique

Description: Resolution of turbulent thermohydraulic problem under low Mach number with passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_thermohydraulique_turbulent_qc_fraction_massique obj Lire obj {
    navier_stokes_turbulent_qc navier_stokes_turbulent_qc
    convection_diffusion_chaleur_turbulent_qc convection_diffusion_chaleur_turbulent_qc
    equations_scalaires_passifs listeqn
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processings|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
    [ sauvegarde format_file]
    [ sauvegarde_simple format_file]
    [ reprise format_file]
    [ resume_last_time format_file]
}
```

where

- **navier_stokes_turbulent_qc** *navier_stokes_turbulent_qc* (5.42): Navier-Stokes equations under low Mach number as well as the associated turbulence model equations.

- **convection_diffusion_chaleur_turbulent_qc** *convection_diffusion_chaleur_turbulent_qc* (5.20): Energy equation under low Mach number as well as the associated turbulence model equations.
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction-massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processing|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.41 pb_thermohydraulique_turbulent_scalaires_passifs

Description: Resolution of thermohydraulic problem, with turbulence modelling and with the additional passive scalar equations.

Keyword Discretize should have already been used to read the object.

See also: pb_avec_passif (4.15)

Usage:

```
pb_thermohydraulique_turbulent_scalaires_passifs obj Lire obj {
    [ navier_stokes_turbulent navier_stokes_turbulent]
    [ convection_diffusion_temperature_turbulent convection_diffusion_temperature_turbulent]
    equations_scalaires_passifs listeqn
    [ Post_processing|postraitement corps_postraitement]
    [ Post_processing|postraitements post_processings]
    [ liste_de_postraitements liste_post_ok]
    [ liste_postraitements liste_post]
```

```

[ sauvegarde format_file]
[ sauvegarde_simple format_file]
[ reprise format_file]
[ resume_last_time format_file]
}
where

```

- **navier_stokes_turbulent** *navier_stokes_turbulent* (5.41): Navier-Stokes equations as well as the associated turbulence model equations.
- **convection_diffusion_temperature_turbulent** *convection_diffusion_temperature_turbulent* (5.32): Energy equations (temperature diffusion convection) as well as the associated turbulence model equations.
- **equations_scalaires_passifs** *listeqn* (4.16) for inheritance: Passive scalar equations. The unknowns of the passive scalar equation number N are named temperatureN or concentrationN or fraction-massiqueN. This keyword is used to define initial conditions and the post processing fields. This kind of problem is very useful to test in only one data file (and then only one calculation) different schemes or different boundary conditions for the scalar transport equation.
- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < > P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.42 pbc_med

Description: Allows to read med files and post-process them.

See also: pb_gen_base (4)

Usage:

```

pbc_med list_info_med
where

```

- **list_info_med** *list_info_med* (4.43)

4.43 list_info_med

Description: not_set

See also: listobj (35.3)

Usage:

{ object1 , object2 }

list of *info_med* (4.43.1) separated with ,

4.43.1 info_med

Description: not_set

See also: objet_lecture (36)

Usage:

file_med **domaine** **pb_post**

where

- **file_med** *str*: Name of the MED file.
- **domaine** *str*: Name of domain.
- **pb_post** *pb_post* (4.29)

4.44 problem_read_generic

Description: The *probleme_read_generic* differs from the rest of the TRUST code : The problem does not state the number of equations that are enclosed in the problem. As the list of equations to be solved in the generic read problem is declared in the data file and not pre-defined in the structure of the problem, each equation has to be distinctively associated with the problem with the Associate keyword.

Keyword Discretize should have already been used to read the object.

See also: Pb_base (4.10) *probleme_ft_disc_gen* (4.46)

Usage:

problem_read_generic obj Lire obj {

```
[ Post_processing|postraitement  corps_postraitement]
[ Post_processings|postraitements post_processings]
[ liste_de_postraitements  liste_post_ok]
[ liste_postraitements  liste_post]
[ sauvegarde  format_file]
[ sauvegarde_simple  format_file]
[ reprise  format_file]
[ resume_last_time  format_file]
```

}

where

- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).

- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N < P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

4.45 pb_couple_rayonnement

Description: This keyword is used to define a problem coupling several other problems to which radiation coupling is added.

See also: probleme_couple (4.11)

Usage:

```
pb_couple_rayonnement obj Lire obj {
    [ groupes list_list_nom ]
}
```

where

- **groupes** *list_list_nom* (4.12) for inheritance: { groupes { { pb1 , pb2 } , { pb3 , pb4 } } }

4.46 probleme_ft_disc_gen

Description: The generic Front-Tracking problem in the discontinuous version. It differs from the rest of the TRUST code : The problem does not state the number of equations that are enclosed in the problem. Two equations are compulsory : a momentum balance equation (alias Navier-Stokes equation) and an interface tracking equation. The list of equations to be solved is declared in the beginning of the data file. Another difference with more classical TRUST data file, lies in the fluids definition. The two-phase fluid (Fluide_Diphastique) is made with two usual single-phase fluids (Fluide_Incompressible). As the list of equations to be solved in the generic Front-Tracking problem is declared in the data file and not pre-defined in the structure of the problem, each equation has to be distinctively associated with the problem with the Associer keyword.

Keyword Discretize should have already been used to read the object.

See also: `problem_read_generic` (4.44)

Usage:

```
probleme_ft_disc_gen obj Lire obj {  
    [ Post_processing|postraitement corps_postraitement]  
    [ Post_processings|postraitements post_processings]  
    [ liste_de_postraitements liste_post_ok]  
    [ liste_postraitements liste_post]  
    [ sauvegarde format_file]  
    [ sauvegarde_simple format_file]  
    [ reprise format_file]  
    [ resume_last_time format_file]  
}
```

where

- **Post_processing|postraitement** *corps_postraitement* (4.2) for inheritance: One post-processing (without name).
- **Post_processings|postraitements** *post_processings* (4.3) for inheritance: List of Postraitement objects (with name).
- **liste_de_postraitements** *liste_post_ok* (4.4) for inheritance: This
- **liste_postraitements** *liste_post* (4.5) for inheritance: This block defines the output files to be written during the computation. The output format is lata in order to use OpenDX to draw the results. This block can be divided in one or several sub-blocks that can be written at different frequencies and in different directories. Attention. The directory lata used in this example should be created before running the computation or the lata files will be lost.
- **sauvegarde** *format_file* (4.6) for inheritance: Keyword used when calculation results are to be backed up. When a coupling is performed, the backup-recovery file name must be well specified for each problem. In this case, you must save to different files and correctly specify these files when resuming the calculation.
- **sauvegarde_simple** *format_file* (4.6) for inheritance: The same keyword than Sauvegarde except, the last time step only is saved.
- **reprise** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file (see the class format_file). If format_reprise is xyz, the name_file file should be the .xyz file created by the previous calculation. With this file, it is possible to resume a parallel calculation on P processors, whereas the previous calculation has been run on N ($N <> P$) processors. Should the calculation be resumed, values for the tinit (see schema_temps_base) time fields are taken from the name_file file. If there is no backup corresponding to this time in the name_file, TRUST exits in error.
- **resume_last_time** *format_file* (4.6) for inheritance: Keyword to resume a calculation based on the name_file file, resume the calculation at the last time found in the file (tinit is set to last time of saved files).

5 mor_eqn

Description: Class of equation pieces (morceaux d'equation).

See also: `objet_u` (37) `eqn_base` (5.33)

Usage:

5.1 Conduction

Description: Heat equation.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

```
Conduction obj Lire obj {
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Example: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.2 bloc_convection

Description: not_set

See also: objet_lecture (36)

Usage:

aco **opérateur** **acof**

where

- **aco** *str* into ['{']: Opening curly bracket.
- **opérateur** *convection_deriv* (5.2.1)
- **acof** *str* into ['}']: Closing curly bracket.

5.2.1 convection_deriv

Description: not_set

See also: objet_lecture (36) *amont* (5.2.2) *amont_old* (5.2.3) *centre* (5.2.4) *centre4* (5.2.5) *centre_old* (5.2.6) *di_l2* (5.2.7) *ef* (5.2.8) *muscl3* (5.2.10) *ef_stab* (5.2.11) *generic* (5.2.14) *kquick* (5.2.15) *muscl* (5.2.16) *muscl_old* (5.2.17) *muscl_new* (5.2.18) *negligeable* (5.2.19) *quick* (5.2.20) *supg* (5.2.21) *btd* (5.2.22) *ale* (5.2.23) *sensibility* (5.2.24) *RT* (5.2.25)

Usage:

convection_deriv

5.2.2 amont

Description: Keyword for upwind scheme for VDF or VEF discretizations. In VEF discretization equivalent to generic *amont* for TRUST version 1.5 or later. The previous upwind scheme can be used with the obsolete *in future amont_old* keyword.

See also: *convection_deriv* (5.2.1)

Usage:

amont

5.2.3 amont_old

Description: Only for VEF discretization, obsolete keyword, see *amont*.

See also: *convection_deriv* (5.2.1)

Usage:

amont_old

5.2.4 centre

Description: For VDF and VEF discretizations.

See also: *convection_deriv* (5.2.1)

Usage:

centre

5.2.5 centre4

Description: For VDF and VEF discretizations.

See also: convection_deriv (5.2.1)

Usage:

centre4

5.2.6 centre_old

Description: Only for VEF discretization.

See also: convection_deriv (5.2.1)

Usage:

centre_old

5.2.7 di_l2

Description: Only for VEF discretization.

See also: convection_deriv (5.2.1)

Usage:

di_l2

5.2.8 ef

Description: For VEF calculations, a centred convective scheme based on Finite Elements formulation can be called through the following data:

Convection { EF transportant_bar val transporte_bar val antisym val filtrer_resu val }

This scheme is 2nd order accuracy (and get better the property of kinetic energy conservation). Due to possible problems of instabilities phenomena, this scheme has to be coupled with stabilisation process (see Source_Qdm_lambdaup). These two last data are equivalent from a theoretical point of view in variationnal writing to : $\text{div}((u \cdot \text{grad } u_b, v_b) - (u \cdot \text{grad } v_b, u_b))$, where v_b corresponds to the filtered reference test functions.

Remark:

This class requires to define a filtering operator : see solveur_bar

See also: convection_deriv (5.2.1)

Usage:

ef [**mot1**] [**bloc_ef**]

where

- **mot1** *str into* ['defaut_bar']: equivalent to transportant_bar 0 transporte_bar 1 filtrer_resu 1 antisym 1
- **bloc_ef** *bloc_ef* (5.2.9)

5.2.9 bloc_ef

Description: not_set

See also: objet_lecture ([36](#))

Usage:

mot1 val1 mot2 val2 mot3 val3 mot4 val4

where

- **mot1** *str* into ['transportant_bar', 'transporte_bar', 'filtrer_resu', 'antisym']
- **val1** *int* into [0, 1]
- **mot2** *str* into ['transportant_bar', 'transporte_bar', 'filtrer_resu', 'antisym']
- **val2** *int* into [0, 1]
- **mot3** *str* into ['transportant_bar', 'transporte_bar', 'filtrer_resu', 'antisym']
- **val3** *int* into [0, 1]
- **mot4** *str* into ['transportant_bar', 'transporte_bar', 'filtrer_resu', 'antisym']
- **val4** *int* into [0, 1]

5.2.10 muscl3

Description: Keyword for a scheme using a ponderation between muscl and center schemes in VEF.

See also: convection_deriv ([5.2.1](#))

Usage:

muscl3 {

 [**alpha** *float*]

}

where

- **alpha** *float*: To weight the scheme centering with the factor double (between 0 (full centered) and 1 (muscl), by default 1).

5.2.11 ef_stab

Description: Keyword for a VEF convective scheme.

See also: convection_deriv ([5.2.1](#))

Usage:

ef_stab {

 [**alpha** *float*]

 [**test** *int*]

 [**tdivu**]

 [**old**]

 [**volumes_etendus**]

 [**volumes_non_etendus**]

 [**amont_sous_zone** *str*]

 [**alpha_sous_zone** *listsous_zone_valeur*]

}

where

- **alpha** *float*: To weight the scheme centering with the factor double (between 0 (full centered) and 1 (mix between upwind and centered), by default 1). For scalar equation, it is advised to use alpha=1 and for the momentum equation, alpha=0.2 is advised.
- **test** *int*: Developer option to compare old and new version of EF_stab
- **tdivu** : To have the convective operator calculated as $\text{div}(\text{TU}) - \text{TdivU} (= \text{UgradT})$.
- **old** : To use old version of EF_stab scheme (default no).
- **volumes_etendus** : Option for the scheme to use the extended volumes (default, yes).
- **volumes_non_etendus** : Option for the scheme to not use the extended volumes (default, no).
- **amont_sous_zone** *str*: Option to degenerate EF_stab scheme into Amont (upwind) scheme in the sub zone of name sz_name. The sub zone may be located arbitrarily in the domain but the more often this option will be activated in a zone where EF_stab scheme generates instabilities as for free outlet for example.
- **alpha_sous_zone** *listsous_zone_valeur* (5.2.12): Option to change locally the alpha value on N sub-zones named sub_zone_name_I. Generally, it is used to prevent from a local divergence by increasing locally the alpha parameter.

5.2.12 listsous_zone_valeur

Description: List of groups of two words.

See also: listobj (35.3)

Usage:

n object1 object2

list of *sous_zone_valeur* (5.2.13)

5.2.13 sous_zone_valeur

Description: Two words.

See also: objet_lecture (36)

Usage:

sous_zone valeur

where

- **sous_zone** *str*: sous zone
- **valeur** *float*: value

5.2.14 generic

Description: Keyword for generic calling of upwind and muscl convective scheme in VEF discretization. For muscl scheme, limiters and order for fluxes calculations have to be specified. The available limiters are : minmod - vanleer - vanalbada - chakravarthy - superbee, and the order of accuracy is 1 or 2. Note that chakravarthy is a non-symmetric limiter and superbee may engender results out of physical limits. By consequence, these two limiters are not recommended.

Examples:

```
convection { generic amont }
convection { generic muscl minmod 1 }
convection { generic muscl vanleer 2 }
```

In case of results out of physical limits with muscl scheme (due for instance to strong non-conformal velocity flow field), user can redefine in data file a lower order and a smoother limiter, as : convection { generic muscl minmod 1 }

See also: convection_deriv ([5.2.1](#))

Usage:

generic **type** [**limiteur**] [**ordre**] [**alpha**]

where

- **type** *str* into [*'amont'*, *'muscl'*, *'centre'*]: type of scheme
- **limiteur** *str* into [*'minmod'*, *'vanleer'*, *'vanalbada'*, *'chakravarthy'*, *'superbee'*]: type of limiter
- **ordre** *int* into [*1*, *2*, *3*]: order of accuracy
- **alpha** *float*: alpha

5.2.15 kquick

Description: Only for VEF discretization.

See also: convection_deriv ([5.2.1](#))

Usage:

kquick

5.2.16 muscl

Description: Keyword for muscl scheme in VEF discretization equivalent to generic muscl vanleer 2 for the 1.5 version or later. The previous muscl scheme can be used with the obsolete in future muscl_old keyword.

See also: convection_deriv ([5.2.1](#))

Usage:

muscl

5.2.17 muscl_old

Description: Only for VEF discretization.

See also: convection_deriv ([5.2.1](#))

Usage:

muscl_old

5.2.18 muscl_new

Description: Only for VEF discretization.

See also: convection_deriv ([5.2.1](#))

Usage:

muscl_new

5.2.19 negligible

Description: For VDF and VEF discretizations. Suppresses the convection operator.

See also: convection_deriv ([5.2.1](#))

Usage:
negligeable

5.2.20 quick

Description: Only for VDF discretization.

See also: `convection_deriv` ([5.2.1](#))

Usage:
quick

5.2.21 supg

Description: Only for EF discretization.

See also: `convection_deriv` ([5.2.1](#))

Usage:
supg {
 facteur *float*
}
where

- **facteur** *float*

5.2.22 btd

Description: Only for EF discretization.

See also: `convection_deriv` ([5.2.1](#))

Usage:
btd {
 btd *float*
 facteur *float*
}
where

- **btd** *float*
- **facteur** *float*

5.2.23 ale

Description: A convective scheme for ALE (Arbitrary Lagrangian-Eulerian) framework.

See also: `convection_deriv` ([5.2.1](#))

Usage:
ale opconv
where

- **opconv** *bloc_convection* (5.2): Choice between: `amont` and `muscl`
Example: `convection { ALE { amont } }`

5.2.24 sensibility

Description: A convective scheme for the sensibility problem.

See also: `convection_deriv` (5.2.1)

Usage:

sensibility opconv

where

- **opconv** *bloc_convection* (5.2): Choice between: `amont` and `muscl`
Example: `convection { Sensibility { amont } }`

5.2.25 RT

Description: Keyword to use RT projection for P1NCP0RT discretization

See also: `convection_deriv` (5.2.1)

Usage:

RT

5.3 bloc_diffusion

Description: `not_set`

See also: `objet_lecture` (36)

Usage:

aco [operateur] [op_implicite] acof

where

- **aco** *str into ['']*: Opening curly bracket.
- **operateur** *diffusion_deriv* (5.3.1): if none is specified, the diffusive scheme used is a 2nd-order scheme.
- **op_implicite** *op_implicite* (5.3.10): To have diffusive implicitation, it use Uzawa algorithm. Very useful when viscosity has large variations.
- **acof** *str into ['']*: Closing curly bracket.

5.3.1 diffusion_deriv

Description: `not_set`

See also: `objet_lecture` (36) `negligeable` (5.3.2) `p1b` (5.3.3) `p1ncp1b` (5.3.4) `stab` (5.3.5) `standard` (5.3.6) `option` (5.3.8) `tenseur_Reynolds_externes` (5.3.9)

Usage:

diffusion_deriv

5.3.2 negligible

Description: the diffusivity will not taken in count

See also: `diffusion_deriv` ([5.3.1](#))

Usage:

negligeable

5.3.3 p1b

Description: `not_set`

See also: `diffusion_deriv` ([5.3.1](#))

Usage:

p1b

5.3.4 p1ncp1b

Description: `not_set`

See also: `diffusion_deriv` ([5.3.1](#))

Usage:

5.3.5 stab

Description: keyword allowing consistent and stable calculations even in case of obtuse angle meshes.

See also: `diffusion_deriv` ([5.3.1](#))

Usage:

stab {

```
[ standard int]  
[ info int]  
[ new_jacobian int]  
[ nu int]  
[ nut int]  
[ nu_transp int]  
[ nut_transp int]
```

}

where

- **standard** *int*: to recover the same results as calculations made by standard laminar diffusion operator. However, no stabilization technique is used and calculations may be unstable when working with obtuse angle meshes (by default 0)
- **info** *int*: developer option to get the stabilizing ratio (by default 0)
- **new_jacobian** *int*: when implicit time schemes are used, this option defines a new jacobian that may be more suitable to get stationary solutions (by default 0)
- **nu** *int*: (respectively **nut** 1) takes the molecular viscosity (resp. eddy viscosity) into account in the velocity gradient part of the diffusion expression (by default `nu=1` and `nut=1`)
- **nut** *int*

- **nu_transp** *int*: (respectively **nut_transp** 1) takes the molecular viscosity (resp. eddy viscosity) into account in the transposed velocity gradient part of the diffusion expression (by default **nu_transp**=0 and **nut_transp**=1)
- **nut_transp** *int*

5.3.6 standard

Description: A new keyword, intended for LES calculations, has been developed to optimise and parameterise each term of the diffusion operator. Remark:

1. This class requires to define a filtering operator : see `solveur_bar`
2. The former (original) version: `diffusion { }` -which omitted some of the term of the diffusion operator- can be recovered by using the following parameters in the new class :
`diffusion { standard grad_Ubar 0 nu 1 nut 1 nu_transp 0 nut_transp 1 filtrer_resu 0 }.`

See also: `diffusion_deriv` (5.3.1)

Usage:

standard [**mot1**] [**bloc_diffusion_standard**]

where

- **mot1** *str* into [*'default_bar'*]: equivalent to `grad_Ubar 1 nu 1 nut 1 nu_transp 1 nut_transp 1 filtrer_resu 1`
- **bloc_diffusion_standard** *bloc_diffusion_standard* (5.3.7)

5.3.7 bloc_diffusion_standard

Description: `grad_Ubar 1` makes the gradient calculated through the filtered values of velocity (P1-conform). `nu 1` (respectively `nut 1`) takes the molecular viscosity (eddy viscosity) into account in the velocity gradient part of the diffusion expression.

`nu_transp 1` (respectively `nut_transp 1`) takes the molecular viscosity (eddy viscosity) into account according in the TRANPOSED velocity gradient part of the diffusion expression.

`filtrer_resu 1` allows to filter the resulting diffusive fluxes contribution.

See also: `objet_lecture` (36)

Usage:

mot1 val1 mot2 val2 mot3 val3 mot4 val4 mot5 val5 mot6 val6

where

- **mot1** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val1** *int* into [*0, 1*]
- **mot2** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val2** *int* into [*0, 1*]
- **mot3** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val3** *int* into [*0, 1*]
- **mot4** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val4** *int* into [*0, 1*]
- **mot5** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val5** *int* into [*0, 1*]
- **mot6** *str* into [*'grad_Ubar', 'nu', 'nut', 'nu_transp', 'nut_transp', 'filtrer_resu'*]
- **val6** *int* into [*0, 1*]

5.3.8 option

Description: not_set

See also: diffusion_deriv (5.3.1)

Usage:

option bloc_lecture

where

- **bloc_lecture** *bloc_lecture* (3.9)

5.3.9 tenseur_Reynolds_externe

Description: Estimate the values of the Reynolds tensor.

See also: diffusion_deriv (5.3.1)

Usage:

tenseur_Reynolds_externe

5.3.10 op_implicite

Description: not_set

See also: objet_lecture (36)

Usage:

implicite mot solveur

where

- **implicite** *str* into ['implicite']
- **mot** *str* into ['solveur']
- **solveur** *solveur_sys_base* (10.17)

5.4 condinits

Description: Initial conditions.

See also: objet_lecture (36)

Usage:

aco condinit acof

where

- **aco** *str* into ['{']: Opening curly bracket.
- **condinit** *condinit* (5.4.1): CI
- **acof** *str* into ['}']: Closing curly bracket.

5.4.1 condinit

Description: Initial condition.

See also: objet_lecture (36)

Usage:

nom ch

where

- **nom** *str*: Name of initial condition field.
- **ch** *champ_base* (16.1): Type field and the initial values.

5.5 sources

Description: The sources.

See also: [listobj \(35.3\)](#)

Usage:

{ object1 , object2 }

list of *source_base* (31) separated with ,

5.6 ecrire_fichier_xyz_valeur_param

Description: *not_set*

Keyword Discretize should have already been used to read the object.

See also: [listobj \(35.3\)](#)

Usage:

n object1 , object2

list of *ecrire_fichier_xyz_valeur_item* (5.6.1) separated with ,

5.6.1 ecrire_fichier_xyz_valeur_item

Description: To write the values of a field for some boundaries in a text file.

The name of the files is *pb_name_field_name_time.dat*

Several *Ecrire_fichier_xyz_valeur* keywords may be written into an equation to write several fields. This kind of files may be read by *Champ_don_lu* or *Champ_front_lu* for example.

See also: [objet_lecture \(36\)](#)

Usage:

name dt_ecrire_fic [bords]

where

- **name** *str*: Name of the field to write (*Champ_Inc*, *Champ_Fonc* or a *post_processed* field).
- **dt_ecrire_fic** *float*: Time period for printing in the file.
- **bords** *bords_ecrire* (5.6.2): to post-process only on some boundaries

5.6.2 bords_ecrire

Description: *not_set*

See also: [objet_lecture \(36\)](#)

Usage:

chaîne bords

where

- **chaîne** *str into ['bords']*
- **bords** *n word1 word2 ... wordn*: Keyword to post-process only on some boundaries :
 bords nb_bords boundary1 ... boundaryn
 where
 nb_bords : number of boundaries
 boundary1 ... boundaryn : name of the boundaries.

5.7 parametre_equation_base

Description: Basic class for parametre_equation

See also: objet_lecture (36) parametre_diffusion_implicite (5.7.1) parametre_implicite (5.7.2)

Usage:

5.7.1 parametre_diffusion_implicite

Description: To specify additional parameters for the equation when using impliciting diffusion

See also: parametre_equation_base (5.7)

Usage:

```
parametre_diffusion_implicite {
    [ crank int into [0, 1]]
    [ preconditionnement_diag int into [0, 1]]
    [ niter_max_diffusion_implicite int]
    [ seuil_diffusion_implicite float]
    [ solveur solveur_sys_base]
}
```

where

- **crank** *int into [0, 1]*: Use (1) or not (0, default) a Crank Nicholson method for the diffusion implication algorithm. Setting crank to 1 increases the order of the algorithm from 1 to 2.
- **preconditionnement_diag** *int into [0, 1]*: The CG used to solve the implication of the equation diffusion operator is not preconditioned by default. If this option is set to 1, a diagonal preconditioning is used. Warning: this option is not necessarily more efficient, depending on the treated case.
- **niter_max_diffusion_implicite** *int*: Change the maximum number of iterations for the CG (Conjugate Gradient) algorithm when solving the diffusion implication of the equation.
- **seuil_diffusion_implicite** *float*: Change the threshold convergence value used by default for the CG resolution for the diffusion implication of this equation.
- **solveur** *solveur_sys_base* (10.17): Method (different from the default one, Conjugate Gradient) to solve the linear system.

5.7.2 parametre_implicite

Description: Keyword to change for this equation only the parameter of the implicit scheme used to solve the problem.

See also: parametre_equation_base (5.7)

Usage:

```
parametre_implicite {
```

```

[ seuil_convergence_implicit float]
[ seuil_convergence_solveur float]
[ solveur solveur_sys_base]
[ resolution_explicite ]
[ equation_non_resolue ]
[ equation_frequence_resolue str]
}
where

```

- **seuil_convergence_implicit** *float*: Keyword to change for this equation only the value of `seuil_convergence_implicit` used in the implicit scheme.
- **seuil_convergence_solveur** *float*: Keyword to change for this equation only the value of `seuil_convergence_solveur` used in the implicit scheme
- **solveur** *solveur_sys_base* (10.17): Keyword to change for this equation only the solver used in the implicit scheme
- **resolution_explicite** : To solve explicitly the equation whereas the scheme is an implicit scheme.
- **equation_non_resolue** : Keyword to specify that the equation is not solved.
- **equation_frequence_resolue** *str*: Keyword to specify that the equation is solved only every *n* time steps (*n* is an integer or given by a time-dependent function *f(t)*).

5.8 Convection_Diffusion_Concentration_Turbulent_FT_Disc

Description: `equation_non_resolue`

Keyword `Discretize` should have already been used to read the object.

See also: `convection_diffusion_concentration_turbulent` (5.23)

Usage:

Convection_Diffusion_Concentration_Turbulent_FT_Disc *obj Lire obj* {

```

[ equation_interface str]
phase int into [0, 1]
[ option str]
[ equations_source_chimie n word1 word2 ... wordn]
[ modele_cinetique int]
[ equation_nu_t str]
[ constante_cinetique float]
[ modele_turbulence modele_turbulence_scal_base]
[ nom_inconnue str]
[ masse_molaire float]
[ alias str]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **equation_interface** *str*: this is the name of the interface tracking equation to watch. The scalar will not diffuse through the interface of this equation.
- **phase** *int into [0, 1]*: tells whether the scalar must be confined in phase 0 or in phase 1
- **option** *str*: Experimental features used to prevent the concentration to leak through the interface between phases due to numerical diffusion.
RIEN: do nothing
RAMASSE_MIETTES_SIMPLE: at each timestep, this algorithm takes all the mass located in the opposite phase and spreads it uniformly in the given phase.
- **equations_source_chimie** *n word1 word2 ... wordn*: This term specifies the name of the concentration equation of the reagents. It should be specified only in the bloc that concerns the convection/diffusion equation of the product.
- **modele_cinetique** *int*: This is the keyword that the user defines for the reaction model that he wants to use. Four reaction models are currently offered (1 to 4). Model 1 is the default one and is based on the laminar rate formulation. Model 2 employs an LES diffusive EDC formulation. Model 3 defines an LES variance formulation. Model 4 is a mix between models 2 and 3.
- **equation_nu_t** *str*: This specifies the name of the hydraulic equation used which defines the turbulent (basically SGS) viscosity.
- **constante_cinetique** *float*: This is the constant kinetic rate of the reaction and is used for the laminar model 1 only.
- **modele_turbulence** *modele_turbulence_scal_base (25)* for inheritance: Turbulence model to be used in the constituent transport equations. The only model currently available is Schmidt.
- **nom_inconnue** *str* for inheritance: Keyword Nom_inconnue will rename the unknown of this equation with the given name. In the postprocessing part, the concentration field will be accessible with this name. This is useful if you want to track more than one concentration (otherwise, only the concentration field in the first concentration equation can be accessed).
- **masse_molaire** *float* for inheritance
- **alias** *str* for inheritance
- **convection** *bloc_convection (5.2)* for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion (5.3)* for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits (5.4)* for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims (4.14.1)* for inheritance: Boundary conditions.
- **sources** *sources (5.5)* for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param (5.6)* for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param (5.6)* for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base (5.7)* for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Example: The Navier-Stokes equations are not solved between time t0 and t1.

```
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }
```

5.9 Convection_Diffusion_Temperature_sensibility

Description: Energy sensitivity equation (temperature diffusion convection)

Keyword Discretize should have already been used to read the object.

See also: convection_diffusion_temperature (5.29)

Usage:

Convection_Diffusion_Temperature_sensibility obj Lire obj {

```
velocity_state bloc_lecture
temperature_state bloc_lecture
uncertain_variable bloc_lecture
convection_sensibility convection_deriv
[ penalisation_l2_ftd pp]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
```

}

where

- **velocity_state** *bloc_lecture* (3.9): Block to indicate the state problem. Between the braces, you must specify the key word 'pb_champ_evaluateur' then the name of the state problem and the velocity unknown
Example: velocity_state { pb_champ_evaluateur pb_state velocity }
- **temperature_state** *bloc_lecture* (3.9): Block to indicate the state problem. Between the braces, you must specify the key word 'pb_champ_evaluateur' then the name of the state problem and the temperature unknown
Example: velocity_state { pb_champ_evaluateur pb_state temperature }
- **uncertain_variable** *bloc_lecture* (3.9): Block to indicate the name of the uncertain variable. Between the braces, you must specify the name of the unknown variable (choice between: temperature, beta_th, boussinesq_temperature, Cp and lambda .
Example: uncertain_variable { temperature }
- **convection_sensibility** *convection_deriv* (5.2.1): Choice between: amount and muscl
Example: convection { Sensibility { amount } }
- **penalisation_l2_ftd** *pp* (5.10) for inheritance: to activate or not (the default is Direct Forcing method) the Penalized Direct Forcing method to impose the specified temperature on the solid-fluid interface.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.

- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.10 pp

Description: not_set

See also: listobj (35.3)

Usage:

{ object1 object2 }

list of *penalisation_l2_ftd_lec* (5.10.1)

5.10.1 penalisation_l2_ftd_lec

Description: not_set

See also: objet_lecture (36)

Usage:

[**postraiter_gradient_pression_sans_masse**] [**correction_matrice_projection_initiale**] [**correction_calcul_pression_initiale**] [**correction_vitesse_projection_initiale**] [**correction_matrice_pression**] [**matrice_pression_penalisee_H1**] [**correction_vitesse_modifie**] [**correction_pression_modifie**] [**gradient_pression_qdm_modifie**] **bord val**

where

- **postraiter_gradient_pression_sans_masse** *int*: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
- **correction_matrice_projection_initiale** *int*: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int*: (IBM advanced) fix initial pressure computation for PDF

- **correction_vitesse_projection_initiale** *int*: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int*: (IBM advanced) fix pressure matrix for PDF
- **matrice_pression_penalisee_H1** *int*: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int*: (IBM advanced) fix velocity for PDF
- **correction_pression_modifie** *int*: (IBM advanced) fix pressure for PDF
- **gradient_pression_qdm_modifie** *int*: (IBM advanced) fix pressure gradient
- **bord** *str*
- **val** *n x1 x2 ... xn*

5.11 Navier_Stokes_Turbulent_ALE

Description: Resolution of hydraulic turbulent Navier-Stokes eq. on mobile domain (ALE)

Keyword Discretize should have already been used to read the object.

See also: Navier_Stokes_std_ALE (5.17)

Usage:

```
Navier_Stokes_Turbulent_ALE obj Lire obj {
    [ modele_turbulence modele_turbulence_hyd_deriv]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **modele_turbulence** *modele_turbulence_hyd_deriv* (5.12): Turbulence model for Navier-Stokes equations.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbyname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

{ equation_non_resolue (t>t0)*(t<t1) }

5.12 modele_turbulence_hyd_deriv

Description: Basic class for turbulence model for Navier-Stokes equations.

See also: objet_lecture (36) mod_turb_hyd_ss_maille (5.12.2) NUL (5.12.18) mod_turb_hyd_rans (5.12.19)

Usage:

```
modele_turbulence_hyd_deriv {  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]  
    [ turbulence_paroit turbulence_paroit_base]  
    [ dt_impr_ustar float]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]  
    [ nut_max float]  
}
```

}

where

- **correction_visco_turb_pour_controle_pas_de_temps** : Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the corr_visco_turb field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float*: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paroit** *turbulence_paroit_base* (33): Keyword to set the wall law.
- **dt_impr_ustar** *float*: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named datafile_ProblemName_Ustar.face and periode refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1): This keyword is used to print the mean values of u* (obtained with the wall laws) on each boundary, into a file named datafile_ProblemName_Ustar_mean_only.out. periode refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword boundaries, all the boundaries will be considered. If you use it, you must specify nb_boundaries which is the number of boundaries on which you want to calculate the mean values of u*, then you have to specify their names.
- **nut_max** *float*: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.1 dt_impr_ustar_mean_only

Description: not_set

See also: objet_lecture (36)

Usage:

```
{  
  
    dt_impr float  
    [ boundaries n word1 word2 ... wordn]  
  
}
```

where

- **dt_impr** float
- **boundaries** n word1 word2 ... wordn

5.12.2 mod_turb_hyd_ss_maille

Description: Class for sub-grid turbulence model for Navier-Stokes equations.

See also: modele_turbulence_hyd_deriv (5.12) sous_maille_selectif_mod (5.12.4) sous_maille_selectif (5.12.7) sous_maille_elt (5.12.8) sous_maille_axi (5.12.10) sous_maille_smago_filtre (5.12.11) sous_maille-smago_dyn (5.12.12) sous_maille_wale (5.12.13) sous_maille_smago (5.12.14) combinaison (5.12.15) longueur_melange (5.12.16) sous_maille (5.12.17)

Usage:

```
mod_turb_hyd_ss_maille {  
  
    [ formulation_a_nb_points form_a_nb_points]  
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]  
    [ turbulence_paroit turbulence_paroit_base]  
    [ dt_impr_ustar float]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]  
    [ nut_max float]  
  
}
```

where

- **formulation_a_nb_points** form_a_nb_points (5.12.3): The structure fonction is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homegeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']: different ways to calculate the characteristic length may be specified :
 - volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
 - volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
 - scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
 - arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.

- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity; it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.3 form_a_nb_points

Description: The structure function is calculated on `nb` points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.

See also: `objet_lecture` (36)

Usage:

nb dir1 dir2

where

- **nb** *int into [4]*: Number of points.
- **dir1** *int*: First direction.
- **dir2** *int*: Second direction.

5.12.4 sous_maille_selectif_mod

Description: Selective structure sub-grid function model (modified).

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

sous_maille_selectif_mod {

```
[ thi deuxentiers]
[ canal floatentier]
[ formulation_a_nb_points form_a_nb_points]
[ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]
[ correction_visco_turb_pour_controle_pas_de_temps ]
[ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
[ turbulence_paro turbulence_paro_base]
[ dt_impr_ustar float]
```

```
[ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
[ nut_max float]
}
```

where

- **thi** *deuxentiers* (5.12.5): For homogeneous isotropic turbulence (THI), two integers k_i and k_c are needed in VDF (not in VEF).
- **canal** *floatentier* (5.12.6): h *dir_faces_pari*: For a channel flow, the half width h and the orientation of the wall *dir_faces_pari* are needed.
- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on nb_points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the *corr_visco_turb* field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_pari** *turbulence_pari_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named *datafile_ProblemName_Ustar.face* and *periode* refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named *datafile_ProblemName_Ustar_mean_only.out*. *periode* refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword *boundaries*, all the boundaries will be considered. If you use it, you must specify *nb_boundaries* which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.5 deuxentiers

Description: Two integers.

See also: *objet_lecture* (36)

Usage:

int1 int2

where

- **int1** *int*: First integer.
- **int2** *int*: Second integer.

5.12.6 floatentier

Description: A real and an integer.

See also: [objet_lecture \(36\)](#)

Usage:

the_float the_int
where

- **the_float** *float*: Real.
- **the_int** *int*: Integer.

5.12.7 sous_maille_selectif

Description: Selective structure sub-grid function model (a filter is applied to the structure function).

See also: [mod_turb_hyd_ss_maille \(5.12.2\)](#)

Usage:

```
sous_maille_selectif {
    [ formulation_a_nb_points form_a_nb_points]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
    [ turbulence_paro turbulence_paro_base]
    [ dt_impr_ustar float]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
    [ nut_max float]
}
```

where

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
 volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
 volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
 scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
 arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when

permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.

- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.8 sous_maille_1elt

Description: Turbulence model `sous_maille_1elt`.

See also: `mod_turb_hyd_ss_maille` (5.12.2) `sous_maille_1elt_selectif_mod` (5.12.9)

Usage:

```
sous_maille_1elt {
    [ formulation_a_nb_points form_a_nb_points ]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] ]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]
    [ turbulence_paro turbulence_paro_base ]
    [ dt_impr_ustar float ]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]
    [ nut_max float ]
}
```

where

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on `nb_points` and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
`volume` : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
`volume_sans_lissage` : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
`scotti` : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
`arete` : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.

- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity; it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.9 sous_maille_1elt_selectif_mod

Description: Turbulence model `sous_maille_1elt_selectif_mod`.

See also: `sous_maille_1elt` (5.12.8)

Usage:

```
sous_maille_1elt_selectif_mod {
    [ formulation_a_nb_points form_a_nb_points ]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] ]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]
    [ turbulence_paro turbulence_paro_base ]
    [ dt_impr_ustar float ]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]
    [ nut_max float ]
}
```

where

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on `nb_points` and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
`volume` : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
`volume_sans_lissage` : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
`scotti` : Characteristic length is based on the cubic root of the volume cells and the Scotti correction

is applied to take into account the stretching of the cell in the case of anisotropic meshes.

arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.

- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.10 sous_maille_axi

Description: Structure sub-grid function turbulence model available in cylindrical co-ordinates.

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

```
sous_maille_axi {
    [ formulation_a_nb_points form_a_nb_points ]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] ]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]
    [ turbulence_paro turbulence_paro_base ]
    [ dt_impr_ustar float ]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]
    [ nut_max float ]
}
```

where

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure fonction is calculated on `nb_points` and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
`volume` : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.

volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).

scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.

arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.

- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity; it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.11 sous_maille_smago_filtre

Description: Smagorinsky sub-grid turbulence model should be used with low-filter.

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

```
sous_maille_smago_filtre {  
    [ formulation_a_nb_points form_a_nb_points ]  
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arete'] ]  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]  
    [ turbulence_paro turbulence_paro_base ]  
    [ dt_impr_ustar float ]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]  
    [ nut_max float ]  
}  
where
```

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on `nb_points` and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arete']* for inheritance: different ways to calculate the characteristic length may be specified :

volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.

volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).

scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.

arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.

- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.12 sous_maille_smago_dyn

Description: Dynamic Smagorinsky sub-grid turbulence model (available in VDF discretization only).

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

```
sous_maille_smago_dyn {
    [ stabilise str into ['6_points', 'moy_euler', 'plans_paralleles']]
    [ nb_points int]
    [ formulation_a_nb_points form_a_nb_points]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arete']]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
    [ turbulence_paro turbulence_paro_base]
    [ dt_impr_ustar float]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
    [ nut_max float]
}
```

where

- **stabilise** *str into* ['6_points', 'moy_euler', 'plans_paralleles']

- **nb_points** *int*
- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
 volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
 volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
 scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
 arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the corr_visco_turb field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named datafile_ProblemName_Ustar.face and periode refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u* (obtained with the wall laws) on each boundary, into a file named datafile_ProblemName_Ustar_mean_only.out. periode refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword boundaries, all the boundaries will be considered. If you use it, you must specify nb_boundaries which is the number of boundaries on which you want to calculate the mean values of u*, then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.13 sous_maille_wale

Description: This is the WALE-model. It is a new sub-grid scale model for eddy-viscosity in LES that has the following properties :

- it goes naturally to 0 at the wall (it doesn't need any information on the wall position or geometry)
- it has the proper wall scaling in $O(y^3)$ in the vicinity of the wall
- it reproduces correctly the laminar to turbulent transition.

See also: mod_turb_hyd_ss_maille (5.12.2)

Usage:

```
sous_maille_wale {
    [ cw float]
    [ formulation_a_nb_points form_a_nb_points]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
}
```

```

[ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
[ turbulence_paro turbulence_paro_base]
[ dt_impr_ustar float]
[ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
[ nut_max float]
}
where

```

- **cw** *float*: The unique parameter (constant) of the WALE-model (by default value 0.5).
- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure fonction is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the *corr_visco_turb* field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named *datafile_ProblemName_Ustar.face* and *periode* refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of *u** (obtained with the wall laws) on each boundary, into a file named *datafile_ProblemName_Ustar_mean_only.out*. *periode* refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword *boundaries*, all the boundaries will be considered. If you use it, you must specify *nb_boundaries* which is the number of boundaries on which you want to calculate the mean values of *u**, then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.14 sous_maille_smago

Description: Smagorinsky sub-grid turbulence model.

$$\text{Nut} = \text{Cs1} * \text{Cs1} * \text{l} * \sqrt{2 * \text{S} * \text{S}}$$

$$\text{K} = \text{Cs2} * \text{Cs2} * \text{l} * 2 * \text{S}$$

See also: *mod_turb_hyd_ss_maille* (5.12.2)

Usage:

```
sous_maille_smago {  
    [ cs float]  
    [ formulation_a_nb_points form_a_nb_points]  
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]  
    [ turbulence_paroit turbulence_paroit_base]  
    [ dt_impr_ustar float]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]  
    [ nut_max float]  
}  
where
```

- **cs float**: This is an optional keyword and the value is used to set the constant used in the Smagorinsky model (This is currently only valid for Smagorinsky models and it is set to 0.18 by default) .
- **formulation_a_nb_points form_a_nb_points** (5.12.3) for inheritance: The structure function is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']** for inheritance: different ways to calculate the characteristic length may be specified :
volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the corr_visco_turb field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre float** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paroit turbulence_paroit_base** (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar float** for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named datafile_ProblemName_Ustar.face and periode refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only dt_impr_ustar_mean_only** (5.12.1) for inheritance: This keyword is used to print the mean values of u* (obtained with the wall laws) on each boundary, into a file named datafile_ProblemName_Ustar_mean_only.out. periode refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword boundaries, all the boundaries will be considered. If you use it, you must specify nb_boundaries which is the number of boundaries on which you want to calculate the mean values of u*, then you have to specify their names.
- **nut_max float** for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.15 combinaison

Description: This keyword specifies a turbulent viscosity model where the turbulent viscosity is user-defined.

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

```
combinaison {  
    [ nb_var n word1 word2 ... wordn ]  
    [ fonction str ]  
    [ formulation_a_nb_points form_a_nb_points ]  
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] ]  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]  
    [ turbulence_paro turbulence_paro_base ]  
    [ dt_impr_ustar float ]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]  
    [ nut_max float ]  
}
```

where

- **nb_var** *n word1 word2 ... wordn*: Number and names of variables which will be used in the turbulent viscosity definition (by default 0)
- **fonction** *str*: Fonction for turbulent viscosity. X,Y,Z and variables defined previously can be used.
- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure fonction is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homegeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.

- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.16 longueur_melange

Description: This model is based on mixing length modelling. For a non academic configuration, formulation used in the code can be expressed basically as :

$$\nu_t = (Kappa.y)^2.dU/dy$$

Till a maximum distance (`dmax`) set by the user in the data file, y is set equal to the distance from the wall (`dist_w`) calculated previously and saved in file `Wall_length.xyz`. [see `Distance_paro` keyword]

Then (from $y=dmax$), y decreases as an exponential function : $y=dmax*\exp[-2.*(dist_w-dmax)/dmax]$

See also: `mod_turb_hyd_ss_maille` (5.12.2)

Usage:

```
longueur_melange {
    [ canalx float]
    [ tuyauz float]
    [ verif_dparoi str]
    [ dmax float]
    [ fichier str]
    [ fichier_ecriture_K_Eps str]
    [ formulation_a_nb_points form_a_nb_points]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
    [ turbulence_paro turbulence_paro_base]
    [ dt_impr_ustar float]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
    [ nut_max float]
}
```

where

- **canalx** *float*: [height] : plane channel according to Ox direction (for the moment, formulation in the code relies on fixed height : $H=2$).
- **tuyauz** *float*: [diameter] : pipe according to Oz direction (for the moment, formulation in the code relies on fixed diameter : $D=2$).
- **verif_dparoi** *str*
- **dmax** *float*: Maximum distance.
- **fichier** *str*
- **fichier_ecriture_K_Eps** *str*: When a resume with k-epsilon model is envisaged, this keyword allows to generate external MED-format file with evaluation of k and epsilon quantities (based on eddy turbulent viscosity and turbulent characteristic length returned by mixing length model). The frequency of the MED file print is set equal to `dt_impr_ustar`. Moreover, k-eps MED field is automatically saved at the last time step. MED file is then used for resuming a K-Epsilon calculation with the `Champ_Fonc_Med` keyword.

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str* into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] for inheritance: different ways to calculate the characteristic length may be specified :
 volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
 volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
 scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
 arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the corr_visco_turb field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named datafile_ProblemName_Ustar.face and periode refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u* (obtained with the wall laws) on each boundary, into a file named datafile_ProblemName_Ustar_mean_only.out. periode refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword boundaries, all the boundaries will be considered. If you use it, you must specify nb_boundaries which is the number of boundaries on which you want to calculate the mean values of u*, then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.17 sous_maille

Description: Structure sub-grid function model.

See also: mod_turb_hyd_ss_maille (5.12.2)

Usage:

```
sous_maille {
    [ formulation_a_nb_points form_a_nb_points ]
    [ longueur_maille str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete'] ]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]
    [ turbulence_paro turbulence_paro_base ]
    [ dt_impr_ustar float ]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]
    [ nut_max float ]
}
```


}
where

- **formulation_a_nb_points** *form_a_nb_points* (5.12.3) for inheritance: The structure function is calculated on nb points and we should add the 2 directions (0:OX, 1:OY, 2:OZ) constituting the homogeneity planes. Example for channel flows, planes parallel to the walls.
- **longueur_maille** *str into ['volume', 'volume_sans_lissage', 'scotti', 'arrete']* for inheritance: different ways to calculate the characteristic length may be specified :
volume : It is the default option. Characteristic length is based on the cubic root of the volume cells. A smoothing procedure is applied to avoid discontinuities of this quantity in VEF from a cell to another.
volume_sans_lissage : For VEF only. Characteristic length is based on the cubic root of the volume cells (without smoothing procedure).
scotti : Characteristic length is based on the cubic root of the volume cells and the Scotti correction is applied to take into account the stretching of the cell in the case of anisotropic meshes.
arete : For VEF only. Characteristic length relies on the max edge (+ smoothing procedure) is taken into account.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the corr_visco_turb field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named datafile_ProblemName_Ustar.face and periode refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named datafile_ProblemName_Ustar_mean_only.out. periode refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword boundaries, all the boundaries will be considered. If you use it, you must specify nb_boundaries which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.18 NUL

Description: not_set

See also: modele_turbulence_hyd_deriv (5.12)

Usage:

NUL [**correction_visco_turb_pour_controle_pas_de_temps**] [**correction_visco_turb_pour_controle_pas_de_temps_parametre**] [**turbulence_paro**] [**dt_impr_ustar**] [**dt_impr_ustar_mean_only**] [**nut_max**]

where

- **correction_visco_turb_pour_controle_pas_de_temps** : Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction

for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.

- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float*: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33): Keyword to set the wall law.
- **dt_impr_ustar** *float*: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1): This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float*: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.19 mod_turb_hyd_rans

Description: Class for RANS turbulence model for Navier-Stokes equations.

See also: `modele_turbulence_hyd_deriv` (5.12) `k_epsilon` (5.12.20) `K_Epsilon_Realisable` (5.12.27)

Usage:

```
mod_turb_hyd_rans {
    [ eps_min float]
    [ eps_max float]
    [ k_min float]
    [ quiet ]
    [ prandtl_k float]
    [ prandtl_eps float]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float]
    [ turbulence_paro turbulence_paro_base]
    [ dt_impr_ustar float]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only]
    [ nut_max float]
}
```

where

- **eps_min** *float*: Lower limitation of epsilon (default value 1.e-10).
- **eps_max** *float*: Upper limitation of epsilon (default value 1.e+10).
- **k_min** *float*: Lower limitation of k (default value 1.e-10).
- **quiet** : To disable printing of information about k and epsilon.
- **prandtl_k** *float*: Keyword to change the Prk value (default 1.0).
- **prandtl_eps** *float*: Keyword to change the Pre value (default 1.3)
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when

permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.

- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.20 k_epsilon

Description: Turbulence model (k-eps).

See also: `mod_turb_hyd_rans` (5.12.19)

Usage:

```
k_epsilon {
    transport_k_epsilon transport_k_epsilon
    [ modele_fonc_bas_reynolds modele_fonction_bas_reynolds_base ]
    [ cmu float ]
    [ prandtl_k float ]
    [ prandtl_eps float ]
    [ eps_min float ]
    [ eps_max float ]
    [ k_min float ]
    [ quiet ]
    [ correction_visco_turb_pour_controle_pas_de_temps ]
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]
    [ turbulence_paro turbulence_paro_base ]
    [ dt_impr_ustar float ]
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]
    [ nut_max float ]
}
```

where

- **transport_k_epsilon** *transport_k_epsilon* (5.48): Keyword to define the (k-eps) transportation equation.
- **modele_fonc_bas_reynolds** *modele_fonction_bas_reynolds_base* (5.12.21): This keyword is used to set the bas Reynolds model used.
- **cmu** *float*: Keyword to modify the C_{mu} constant of k-eps model : $Nut = C_{mu} * k / \epsilon$ Default value is 0.09
- **prandtl_k** *float*: Keyword to change the Pr_k value (default 1.0).
- **prandtl_eps** *float*: Keyword to change the Pr_ϵ value (default 1.3).

- **eps_min** *float* for inheritance: Lower limitation of epsilon (default value 1.e-10).
- **eps_max** *float* for inheritance: Upper limitation of epsilon (default value 1.e+10).
- **k_min** *float* for inheritance: Lower limitation of k (default value 1.e-10).
- **quiet** for inheritance: To disable printing of information about k and epsilon.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity; it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_paro** *turbulence_paro_base* (33) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U^+ , d^+ , u^*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* (5.12.1) for inheritance: This keyword is used to print the mean values of u^* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.
- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.12.21 modele_fonction_bas_reynolds_base

Description: `not_set`

See also: `objet_lecture` (36) `Lam_Bremhorst` (5.12.22) `Jones_Launders` (5.12.25) `Launders_Sharma` (5.12.26)

Usage:

5.12.22 Lam_Bremhorst

Description: Model described in ' C.K.G.Lam and K.Bremhorst, A modified form of the k- epsilon model for predicting wall turbulence, ASME J. Fluids Engng., Vol.103, p456, (1981)'. Only in VEF.

See also: `modele_fonction_bas_reynolds_base` (5.12.21) `standard_KEps` (5.12.23) `EASM_Baglietto` (5.12.24)

Usage:

```
Lam_Bremhorst {
    [ fichier_distance_paro str]
    [ reynolds_stress_isotrope int]
}
```

where

- **fichier_distance_paro** *str*: refer to `distance_paro` keyword
- **reynolds_stress_isotrope** *int*: keyword for isotropic Reynolds stress

5.12.23 standard_KEps

Description: Model described in ' E. Baglietto , CFD and DNS methodologies development for fuel bundle simulaions, Nuclear Engineering and Design, 1503–1510 (236), 2006. '

See also: Lam_Bremhorst ([5.12.22](#))

Usage:

```
standard_KEps {  
    [ fichier_distance_paroi str]  
    [ reynolds_stress_isotrope int]  
}  
where
```

- **fichier_distance_paro**i *str* for inheritance: refer to distance_paro keyword
- **reynolds_stress_isotrope** *int* for inheritance: keyword for isotropic Reynolds stress

5.12.24 EASM_Baglietto

Description: Model described in ' E. Baglietto and H. Ninokata , A turbulence model study for simulating flow inside tight lattice rod bundles, Nuclear Engineering and Design, 773–784 (235), 2005. '

See also: Lam_Bremhorst ([5.12.22](#))

Usage:

```
EASM_Baglietto {  
    [ fichier_distance_paroi str]  
    [ reynolds_stress_isotrope int]  
}  
where
```

- **fichier_distance_paro**i *str* for inheritance: refer to distance_paro keyword
- **reynolds_stress_isotrope** *int* for inheritance: keyword for isotropic Reynolds stress

5.12.25 Jones_Launder

Description: Model described in ' Jones, W. P. and Launder, B. E. (1972), The prediction of laminarization with a two-equation model of turbulence, Int. J. of Heat and Mass transfer, Vol. 15, pp. 301-314.'

See also: modele_fonction_bas_reynolds_base ([5.12.21](#))

Usage:

5.12.26 Launder_Sharma

Description: Model described in ' Launder, B. E. and Sharma, B. I. (1974), Application of the Energy-Dissipation Model of Turbulence to the Calculation of Flow Near a Spinning Disc, Letters in Heat and Mass Transfer, Vol. 1, No. 2, pp. 131-138.'

See also: modele_fonction_bas_reynolds_base ([5.12.21](#))

Usage:

5.12.27 K_Epsilon_Realisable

Description: Realizable K-Epsilon Turbulence Model.

See also: `mod_turb_hyd_rans` ([5.12.19](#))

Usage:

```
K_Epsilon_Realisable {  
    transport_k_epsilon_realisable str  
    modele_fonc_realisable modele_fonc_realisable_base  
    prandtl_k float  
    prandtl_eps float  
    [ eps_min float ]  
    [ eps_max float ]  
    [ k_min float ]  
    [ quiet ]  
    [ correction_visco_turb_pour_controle_pas_de_temps ]  
    [ correction_visco_turb_pour_controle_pas_de_temps_parametre float ]  
    [ turbulence_parois turbulence_parois_base ]  
    [ dt_impr_ustar float ]  
    [ dt_impr_ustar_mean_only dt_impr_ustar_mean_only ]  
    [ nut_max float ]  
}
```

where

- **transport_k_epsilon_realisable** *str*: Keyword to define the realisable (k-eps) transportation equation.
- **modele_fonc_realisable** *modele_fonc_realisable_base* ([10.2](#)): This keyword is used to set the model used
- **prandtl_k** *float*: Keyword to change the Prk value (default 1.0).
- **prandtl_eps** *float*: Keyword to change the Pre value (default 1.3)
- **eps_min** *float* for inheritance: Lower limitation of epsilon (default value 1.e-10).
- **eps_max** *float* for inheritance: Upper limitation of epsilon (default value 1.e+10).
- **k_min** *float* for inheritance: Lower limitation of k (default value 1.e-10).
- **quiet** for inheritance: To disable printing of information about k and epsilon.
- **correction_visco_turb_pour_controle_pas_de_temps** for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is calculated so that diffusive time-step is equal or higher than convective time-step. For a stationary flow, the correction for turbulent viscosity should apply only during the first time steps and not when permanent state is reached. To check that, we could post process the `corr_visco_turb` field which is the correction of turbulent viscosity: it should be 1. on the whole domain.
- **correction_visco_turb_pour_controle_pas_de_temps_parametre** *float* for inheritance: Keyword to set a limitation to low time steps due to high values of turbulent viscosity. The limit for turbulent viscosity is the ratio between diffusive time-step and convective time-step is higher or equal to the given value [0-1]
- **turbulence_parois** *turbulence_parois_base* ([33](#)) for inheritance: Keyword to set the wall law.
- **dt_impr_ustar** *float* for inheritance: This keyword is used to print the values (U +, d+, u*) obtained with the wall laws into a file named `datafile_ProblemName_Ustar.face` and `periode` refers to the printing period, this value is expressed in seconds.
- **dt_impr_ustar_mean_only** *dt_impr_ustar_mean_only* ([5.12.1](#)) for inheritance: This keyword is used to print the mean values of u* (obtained with the wall laws) on each boundary, into a file named `datafile_ProblemName_Ustar_mean_only.out`. `periode` refers to the printing period, this value is expressed in seconds. If you don't use the optional keyword `boundaries`, all the boundaries will

be considered. If you use it, you must specify `nb_boundaries` which is the number of boundaries on which you want to calculate the mean values of u^* , then you have to specify their names.

- **nut_max** *float* for inheritance: Upper limitation of turbulent viscosity (default value 1.e8).

5.13 Navier_Stokes_standard_sensibility

Description: Resolution of Navier-Stokes sensitivity problem

Keyword Discretize should have already been used to read the object.

See also: `navier_stokes_standard` (5.40)

Usage:

Navier_Stokes_standard_sensibility obj Lire obj {

```

state bloc_lecture
uncertain_variable bloc_lecture
[ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
_operateurs', 'sans_rien']]
[ projection_initiale int]
[ solveur_pression solveur_sys_base]
[ solveur_bar solveur_sys_base]
[ dt_projection deuxmots]
[ seuil_divU floatfloat]
[ traitement_particulier traitement_particulier]
[ correction_matrice_projection_initiale int]
[ correction_calcul_pression_initiale int]
[ correction_vitesse_projection_initiale int]
[ correction_matrice_pression int]
[ correction_vitesse_modifie int]
[ gradient_pression_qdm_modifie int]
[ correction_pression_modifie int]
[ postraiter_gradient_pression_sans_masse ]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limités condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]

```

}

where

- **state** *bloc_lecture* (3.9): Block to indicate the state problem. Between the braces, you must specify the key word 'pb_champ_evaluateur' then the name of the state problem and the velocity unknown
Example: state { pb_champ_evaluateur pb_state velocity }
- **uncertain_variable** *bloc_lecture* (3.9): Block to indicate the name of the uncertain variable. Between the braces, you must specify the name of the unknown variable. Choice between velocity and mu.
Example: uncertain_variable { velocity }
- **methode_calcul_pression_initiale** *str into ['avec_les_cl', 'avec_sources', 'avec_sources_et_operateurs', 'sans_rien']* for inheritance: Keyword to select an option for the pressure calculation before the fist

time step. Options are : avec_les_cl (default option lapP=0 is solved with Neuman boundary conditions on pressure if any), avec_sources (lapP=f is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and avec_sources_et_operateurs (lapP=f is solved as with the previous option avec_sources but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.

- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{DivU}=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and Source_Qdm_lambdaup). A file (solveur.bar) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: nb value : This keyword checks every nb time-steps the equality of velocity divergence to zero. value is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: value factor : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in solveur_pression) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value $\text{seuil}(t_{n+1})$ will be evaluated as:
 If ($\text{lmax}(\text{DivU}) * dt < \text{value}$)
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) * \text{factor}$
 Else
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) * \text{factor}$
 Endif
 The first parameter (value) is the mass evolution the user is ready to accept per timestep, and the second one (factor) is the factor of evolution for 'seuil' (for example 1.1, so 10)
- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
- **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
- **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF
- **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
- **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
- **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
 n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

{ equation_non_resolue (t>t0)*(t<t1) }

5.14 deuxmots

Description: Two words.

See also: objet_lecture (36)

Usage:

mot_1 mot_2

where

- **mot_1** *str*: First word.
- **mot_2** *str*: Second word.

5.15 floatfloat

Description: Two reals.

See also: objet_lecture (36)

Usage:

a b

where

- **a** *float*: First real.
- **b** *float*: Second real.

5.16 traitement_particulier

Description: Auxiliary class to post-process particular values.

See also: objet_lecture (36)

Usage:

aco trait_part acof

where

- **aco** *str* into [' ']: Opening curly bracket.
- **trait_part** *traitement_particulier_base* (5.16.1): Type of *traitement_particulier*.
- **acof** *str* into [' ']: Closing curly bracket.

5.16.1 **traitement_particulier_base**

Description: Basic class to post-process particular values.

See also: *objet_lecture* (36) *temperature* (5.16.2) *canal* (5.16.3) *ec* (5.16.4) *thi* (5.16.5) *chmoy_faceperio* (5.16.7) *profils_thermo* (5.16.8) *brech* (5.16.9) *ceg* (5.16.10)

Usage:

5.16.2 **temperature**

Description: *not_set*

See also: *traitement_particulier_base* (5.16.1)

Usage:

```
temperature {
    bord str
    direction int
}
```

where

- **bord** *str*
- **direction** *int*

5.16.3 **canal**

Description: Keyword for statistics on a periodic plane channel.

See also: *traitement_particulier_base* (5.16.1)

Usage:

```
canal {
    [ dt_impr_moy_spat float]
    [ dt_impr_moy_temp float]
    [ debut_stat float]
    [ fin_stat float]
    [ pulsation_w float]
    [ nb_points_par_phase int]
    [ reprise str]
}
```

where

- **dt_impr_moy_spat** *float*: Period to print the spatial average (default value is 1e6).
- **dt_impr_moy_temp** *float*: Period to print the temporal average (default value is 1e6).
- **debut_stat** *float*: Time to start the temporal averaging (default value is 1e6).
- **fin_stat** *float*: Time to end the temporal averaging (default value is 1e6).

- **pulsation_w** *float*: Pulsation for phase averaging (in case of pulsating forcing term) (no default value).
- **nb_points_par_phase** *int*: Number of samples to represent phase average all along a period (no default value).
- **reprise** *str*: val_moy_temp_xxxxxx.sauv : Keyword to resume a calculation with previous averaged quantities.

Note that for thermal and turbulent problems, averages on temperature and turbulent viscosity are automatically calculated. To resume a calculation with phase averaging, val_moy_temp_xxxxxx.sauv_phase file is required on the directory where the job is submitted (this last file will be then automatically loaded by TRUST).

5.16.4 ec

Description: Keyword to print total kinetic energy into the referential linked to the domain (keyword Ec). In the case where the domain is moving into a Galilean referential, the keyword Ec_dans_repere_fixe will print total kinetic energy in the Galilean referential whereas Ec will print the value calculated into the moving referential linked to the domain

See also: traitement_particulier_base (5.16.1)

Usage:

```
ec {
    [ Ec ]
    [ Ec_dans_repere_fixe ]
    [ periode float]
}
```

where

- **Ec**
- **Ec_dans_repere_fixe**
- **periode** *float*: periode is the keyword to set the period of printing into the file datafile_Ec.son or datafile_Ec_dans_repere_fixe.son.

5.16.5 thi

Description: Keyword for a THI (Homogeneous Isotropic Turbulence) calculation.

See also: traitement_particulier_base (5.16.1) thi_thermo (5.16.6)

Usage:

```
thi {
    init_Ec int
    [ val_Ec float]
    [ facon_init int into [0, 1]]
    [ calc_spectre int into [0, 1]]
    [ periode_calc_spectre float]
    [ 3D int into [0, 1]]
    [ 1D int into [0, 1]]
    [ conservation_Ec ]
    [ longueur_boite float]
```

}
where

- **init_Ec** *int*: Keyword to renormalize initial velocity so that kinetic energy equals to the value given by keyword **val_Ec**.
- **val_Ec** *float*: Keyword to impose a value for kinetic energy by velocity renormalized if **init_Ec** value is 1.
- **facon_init** *int into [0, 1]*: Keyword to specify how kinetic energy is computed (0 or 1).
- **calc_spectre** *int into [0, 1]*: Calculate or not the spectrum of kinetic energy.
Files called **Sorties_THI** are written with inside four columns :
time:t global_kinetic_energy:Ec enstrophy:D skewness:S
If **calc_spectre** is set to 1, a file **Sorties_THI2_2** is written with three columns :
time:t kinetic_energy_at_kc=32 enstrophy_at_kc=32
If **calc_spectre** is set to 1, a file **spectre_XXXXX** is written with two columns at each time **XXXXX** :
frequency:k energy:E(k).
- **periode_calc_spectre** *float*: Period for calculating spectrum of kinetic energy
- **3D** *int into [0, 1]*: Calculate or not the 3D spectrum
- **1D** *int into [0, 1]*: Calculate or not the 1D spectrum
- **conservation_Ec** : If set to 1, velocity field will be changed as to have a constant kinetic energy (default 0)
- **longueur_boite** *float*: Length of the calculation domain

5.16.6 thi_thermo

Description: Treatment for the temperature field.

It offers the possibility to :

- evaluate the probability density function on temperature field,
- give in a file the temperature field for a future spectral analysis,
- monitor the evolution of the max and min temperature on the whole domain.

See also: thi ([5.16.5](#))

Usage:

```
thi_thermo {  
    init_Ec int  
    [ val_Ec float]  
    [ facon_init int into [0, 1]]  
    [ calc_spectre int into [0, 1]]  
    [ periode_calc_spectre float]  
    [ 3D int into [0, 1]]  
    [ 1D int into [0, 1]]  
    [ conservation_Ec ]  
    [ longueur_boite float]
```

}
where

- **init_Ec** *int* for inheritance: Keyword to renormalize initial velocity so that kinetic energy equals to the value given by keyword **val_Ec**.
- **val_Ec** *float* for inheritance: Keyword to impose a value for kinetic energy by velocity renormalized if **init_Ec** value is 1.
- **facon_init** *int into [0, 1]* for inheritance: Keyword to specify how kinetic energy is computed (0 or 1).

- **calc_spectre** *int into [0, 1]* for inheritance: Calculate or not the spectrum of kinetic energy.
Files called Sorties_THI are written with inside four columns :
time:t global_kinetic_energy:Ec enstrophy:D skewness:S
If calc_spectre is set to 1, a file Sorties_THI2_2 is written with three columns :
time:t kinetic_energy_at_kc=32 enstrophy_at_kc=32
If calc_spectre is set to 1, a file spectre_XXXXX is written with two columns at each time XXXXX :
frequency:k energy:E(k).
- **periode_calc_spectre** *float* for inheritance: Period for calculating spectrum of kinetic energy
- **3D** *int into [0, 1]* for inheritance: Calculate or not the 3D spectrum
- **1D** *int into [0, 1]* for inheritance: Calculate or not the 1D spectrum
- **conservation_Ec** for inheritance: If set to 1, velocity field will be changed as to have a constant kinetic energy (default 0)
- **longueur_boite** *float* for inheritance: Length of the calculation domain

5.16.7 chmoy_faceperio

Description: non documente

See also: traitement_particulier_base (5.16.1)

Usage:

chmoy_faceperio bloc

where

- **bloc** *bloc_lecture* (3.9)

5.16.8 profils_thermo

Description: non documente

See also: traitement_particulier_base (5.16.1)

Usage:

profils_thermo bloc

where

- **bloc** *bloc_lecture* (3.9)

5.16.9 brech

Description: non documente

See also: traitement_particulier_base (5.16.1)

Usage:

brech bloc

where

- **bloc** *bloc_lecture* (3.9)

5.16.10 ceg

Description: Keyword for a CEG (Gas Entrainment Criteria) calculation. An objective is deepening gas entrainment on the free surface. Numerical analysis can be performed to predict the hydraulic and geometric conditions that can handle gas entrainment from the free surface.

See also: `traitement_particulier_base` ([5.16.1](#))

Usage:

```
ceg {  
    frontiere str  
    t_deb float  
    [ t_fin float]  
    [ dt_post float]  
    haspi float  
    [ debug int]  
    [ areva ceg_areva]  
    [ cea_jaea ceg_cea_jaea]
```

```
}
```

where

- **frontiere** *str*: To specify the boundaries conditions representing the free surfaces
- **t_deb** *float*: value of the CEG's initial calculation time
- **t_fin** *float*: not_set time during which the CEG's calculation was stopped
- **dt_post** *float*: periode refers to the printing period, this value is expressed in seconds
- **haspi** *float*: The suction height required to calculate AREVA's criterion
- **debug** *int*
- **areva** *ceg_areva* ([5.16.11](#)): AREVA's criterion
- **cea_jaea** *ceg_cea_jaea* ([5.16.12](#)): CEA_JAEA's criterion

5.16.11 ceg_areva

Description: not_set

See also: `objet_lecture` ([36](#))

Usage:

```
{  
    [ c float]
```

```
}
```

where

- **c** *float*

5.16.12 ceg_cea_jaea

Description: not_set

See also: `objet_lecture` ([36](#))

Usage:

```
{
```

```

[ normalise int]
[ nb_mailles_mini int]
[ min_critere_q_sur_max_critere_q float]
}
where

```

- **normalise** *int*: renormalize (1) or not (0) values alpha and gamma
- **nb_mailles_mini** *int*: Sets the minimum number of cells for the detection of a vortex.
- **min_critere_q_sur_max_critere_q** *float*: Is an optional keyword used to correct the minimum values of Q's criterion taken into account in the detection of a vortex

5.17 Navier_Stokes_std_ALE

Description: Resolution of hydraulic Navier-Stokes eq. on mobile domain (ALE)

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33) Navier_Stokes_Turbulent_ALE (5.11)

Usage:

Navier_Stokes_std_ALE obj Lire obj {

```

[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

{ equation_non_resolue (t>t0)*(t<t1) }

5.18 Transport_K_Eps_Realisable

Description: Realizable K-Epsilon Turbulence Model Transport Equations for K and Epsilon.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

Transport_K_Eps_Realisable obj Lire obj {

[**convection** *bloc_convection*]

[**diffusion** *bloc_diffusion*]

[**initial_conditions|conditions_initiales** *condinits*]

[**boundary_conditions|conditions_limites** *condlims*]

[**sources** *sources*]

[**ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param*]

[**ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param*]

[**parametre_equation** *parametre_equation_base*]

[**equation_non_resolue** *str*]

}

where

- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.

- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)

- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:

n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.19 convection_diffusion_chaleur_qc

Description: Energy equation under low Mach number.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33) convection_diffusion_chaleur_turbulent_qc (5.20)

Usage:

convection_diffusion_chaleur_qc obj Lire obj {

```
[ mode_calcul_convection str into ['ancien', 'divuT_moins_Tdivu', 'divrhout_moins_Tdivrhout']
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
```

}

where

- **mode_calcul_convection** *str into ['ancien', 'divuT_moins_Tdivu', 'divrhout_moins_Tdivrhout']*: Option to set the form of the convective operator
divrhout_moins_Tdivrhout (the default since 1.6.8): $\rho \cdot u \cdot \text{grad} T = \text{div}(\rho \cdot u \cdot T) - T \cdot \text{div}(\rho \cdot u)$
ancien: $u \cdot \text{grad} T = \text{div}(u \cdot T) - T \cdot \text{div}(u)$
divuT_moins_Tdivu : $u \cdot \text{grad} T = \text{div}(u \cdot T) - T \cdot \text{div}(u)$
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbnome_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following

```

format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat

```

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.20 convection_diffusion_chaleur_turbulent_qc

Description: Energy equation under low Mach number as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.
See also: convection_diffusion_chaleur_qc (5.19)

Usage:

```

convection_diffusion_chaleur_turbulent_qc obj Lire obj {
    [ modele_turbulence modele_turbulence_scal_base]
    [ mode_calcul_convection str into ['ancien', 'divuT_moins_Tdivu', 'divrhout_moins_Tdivrhout']]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}

```

where

- **modele_turbulence** *modele_turbulence_scal_base* (25): Turbulence model for the energy equation.
- **mode_calcul_convection** *str into ['ancien', 'divuT_moins_Tdivu', 'divrhout_moins_Tdivrhout']* for inheritance: Option to set the form of the convective operator
divrhout_moins_Tdivrhout (the default since 1.6.8): $\rho \cdot u \cdot \text{grad}T = \text{div}(\rho \cdot u \cdot T) - T \cdot \text{div}(\rho \cdot u)$
ancien: $u \cdot \text{grad}T = \text{div}(u \cdot T) - T \cdot \text{div}(u)$
divuT_moins_Tdivu : $u \cdot \text{grad}T = \text{div}(u \cdot T) - T \cdot \text{div}(u)$
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)

- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.21 convection_diffusion_concentration

Description: Constituent transport vectorial equation (concentration diffusion convection).

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33) convection_diffusion_concentration_turbulent (5.23) convection_diffusion_concentration_ft_disc (5.22) convection_diffusion_phase_field (5.28)

Usage:

```
convection_diffusion_concentration obj Lire obj {
    [ nom_inconnue str]
    [ masse_molaire float]
    [ alias str]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limités condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **nom_inconnue** *str*: Keyword Nom_inconnue will rename the unknown of this equation with the given name. In the postprocessing part, the concentration field will be accessible with this name. This is usefull if you want to track more than one concentration (otherwise, only the concentration field in the first concentration equation can be accessed).
- **masse_molaire** *float*

- **alias** *str*
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.22 convection_diffusion_concentration_ft_disc

Description: not_set

Keyword Discretize should have already been used to read the object.

See also: convection_diffusion_concentration (5.21)

Usage:

convection_diffusion_concentration_ft_disc obj Lire obj {

```
[ equation_interface  str]
phase  int into [0, 1]
[ option  str]
[ nom_inconnue  str]
[ masse_molaire  float]
[ alias  str]
[ convection  bloc_convection]
[ diffusion  bloc_diffusion]
[ initial_conditions|conditions_initiales  condinits]
[ boundary_conditions|conditions_limites  condlims]
[ sources  sources]
[ ecrire_fichier_xyz_valeur  ecrire_fichier_xyz_valeur_param]
```

```

[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **equation_interface** *str*: this is the name of the interface tracking equation to watch. The scalar will not diffuse through the interface of this equation.
- **phase** *int into [0, 1]*: tells whether the scalar must be confined in phase 0 or in phase 1
- **option** *str*: Experimental features used to prevent the concentration to leak through the interface between phases due to numerical diffusion.
RIEN: do nothing
RAMASSE_MIETTES_SIMPLE: at each timestep, this algorithm takes all the mass located in the opposite phase and spreads it uniformly in the given phase.
- **nom_inconnue** *str* for inheritance: Keyword *Nom_inconnue* will rename the unknown of this equation with the given name. In the postprocessing part, the concentration field will be accessible with this name. This is useful if you want to track more than one concentration (otherwise, only the concentration field in the first concentration equation can be accessed).
- **masse_molaire** *float* for inheritance
- **alias** *str* for inheritance
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limite** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Example: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.23 convection_diffusion_concentration_turbulent

Description: Constituent transport equations (concentration diffusion convection) as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.

See also: convection_diffusion_concentration (5.21) Convection_Diffusion_Concentration_Turbulent_FT-Disc (5.8)

Usage:

```
convection_diffusion_concentration_turbulent obj Lire obj {
    [ modele_turbulence modele_turbulence_scal_base]
    [ nom_inconnue str]
    [ masse_molaire float]
    [ alias str]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **modele_turbulence** *modele_turbulence_scal_base* (25): Turbulence model to be used in the constituent transport equations. The only model currently available is Schmidt.
- **nom_inconnue** *str* for inheritance: Keyword Nom_inconnue will rename the unknown of this equation with the given name. In the postprocessing part, the concentration field will be accessible with this name. This is useful if you want to track more than one concentration (otherwise, only the concentration field in the first concentration equation can be accessed).
- **masse_molaire** *float* for inheritance
- **alias** *str* for inheritance
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

```
x_1 y_1 [z_1] val_1
```

```
...
```

```
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

```
{ equation_non_resolue (t>t0)*(t<t1) }
```

5.24 convection_diffusion_fraction_massique_mb_qc

Description: Species conservation equation under low Mach number.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33) convection_diffusion_fraction_massique_mb_turbulent_qc (5.25)

Usage:

convection_diffusion_fraction_massique_mb_qc obj Lire obj {

```
[ convection bloc_convection]
```

```
[ diffusion bloc_diffusion]
```

```
[ initial_conditions|conditions_initiales condinits]
```

```
[ boundary_conditions|conditions_limites condlims]
```

```
[ sources sources]
```

```
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
```

```
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
```

```
[ parametre_equation parametre_equation_base]
```

```
[ equation_non_resolue str]
```

```
}
```

where

- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.

- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)

- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:

```
n_valeur
```

```
x_1 y_1 [z_1] val_1
```

```
...
```

```
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

```
x_1 y_1 [z_1] val_1
```

```
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
```

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.25 convection_diffusion_fraction_massique_mb_turbulent_qc

Description: Species conservation equation under low Mach number as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.
See also: convection_diffusion_fraction_massique_mb_qc (5.24)

Usage:

```
convection_diffusion_fraction_massique_mb_turbulent_qc obj Lire obj {
    [ modele_turbulence modele_turbulence_scal_base]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **modele_turbulence** *modele_turbulence_scal_base* (25): Turbulence model for the species conservation equation.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: `n_valeur`
`x_1 y_1 [z_1] val_1`
`...`
`x_n y_n [z_n] val_n`
The created files are named : `pbname_fieldname_[boundaryname]_time.dat`
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if `equation_non_resolue` keyword is used. Exemple: The Navier-Stokes equations are not solved between time `t0` and `t1`.
`Navier_Sokes_Standard`
`{ equation_non_resolue (t>t0)*(t<t1) }`

5.26 convection_diffusion_fraction_massique_qc

Description: `not_set`

Keyword Discretize should have already been used to read the object.

See also: `eqn_base` (5.33)

Usage:

convection_diffusion_fraction_massique_qc obj Lire obj {

```

    espece espece
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]

```

}

where

- **espece** *espece* (15)
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format: `n_valeur`
`x_1 y_1 [z_1] val_1`
`...`
`x_n y_n [z_n] val_n`
The created files are named : `pbname_fieldname_[boundaryname]_time.dat`

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: `n_valeur`
`x_1 y_1 [z_1] val_1`
...
`x_n y_n [z_n] val_n`
The created files are named : `pdbname_fieldname_[boundaryname]_time.dat`
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if `equation_non_resolue` keyword is used. Exemple: The Navier-Stokes equations are not solved between time `t0` and `t1`.
`Navier_Sokes_Standard`
`{ equation_non_resolue (t>t0)*(t<t1) }`

5.27 convection_diffusion_fraction_massique_turbulent_qc

Description: `not_set`

Keyword Discretize should have already been used to read the object.

See also: `eqn_base` (5.33)

Usage:

convection_diffusion_fraction_massique_turbulent_qc *obj Lire obj {*

```
[ modele_turbulence modele_turbulence_scal_base]
espece espece
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
```

}

where

- **modele_turbulence** *modele_turbulence_scal_base* (25): Turbulence model to be used.
- **espece** *espece* (15)
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
`n_valeur`
`x_1 y_1 [z_1] val_1`

```

...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
• ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param (5.6) for inheritance: This key-
word is used to write the values of a field only for some boundaries in a binary file with the following
format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
• parametre_equation parametre_equation_base (5.7) for inheritance: Keyword used to specify ad-
ditional parameters for the equation
• equation_non_resolue str for inheritance: The equation will not be solved while condition(t) is
verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not
solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

```

5.28 convection_diffusion_phase_field

Description: Cahn-Hilliard equation of the Phase Field problem. The unknown of this equation is the concentration C.

Keyword Discretize should have already been used to read the object.

See also: convection_diffusion_concentration (5.21)

Usage:

convection_diffusion_phase_field obj Lire obj {

```

[ mu_1 float]
[ mu_2 float]
[ rho_1 float]
[ rho_2 float]
potentiel_chimique_generalise str into ['avec_energie_cinetique', 'sans_energie_cinetique']
[ nom_inconnue str]
[ masse_molaire float]
[ alias str]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limités condlims]
[ sources sources]
[ écrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ écrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]

```

}

where

- **mu_1** *float*: Dynamic viscosity of the first phase.
- **mu_2** *float*: Dynamic viscosity of the second phase.
- **rho_1** *float*: Density of the first phase.
- **rho_2** *float*: Density of the second phase.

- **potentiel_chimique_generalise** *str* into [*'avec_energie_cinetique'*, *'sans_energie_cinetique'*]: To define (chaîne set to *avec_energie_cinetique*) or not (chaîne set to *sans_energie_cinetique*) if the Cahn-Hilliard equation contains the cinetic energy term.
- **nom_inconnue** *str* for inheritance: Keyword *Nom_inconnue* will rename the unknown of this equation with the given name. In the postprocessing part, the concentration field will be accessible with this name. This is usefull if you want to track more than one concentration (otherwise, only the concentration field in the first concentration equation can be accessed).
- **masse_molaire** *float* for inheritance
- **alias** *str* for inheritance
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : *pbname_fieldname_[boundaryname]_time.dat*
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: *n_valeur*
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : *pbname_fieldname_[boundaryname]_time.dat*
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if *equation_non_resolue* keyword is used. Exemple: The Navier-Stokes equations are not solved between time *t0* and *t1*.
Navier_Sokes_Standard
{ *equation_non_resolue* (*t>t0*)*(*t<t1*) }

5.29 convection_diffusion_temperature

Description: Energy equation (temperature diffusion convection).

Keyword *Discretize* should have already been used to read the object.

See also: *eqn_base* (5.33) *convection_diffusion_temperature_ft_disc* (5.30) *Convection_Diffusion_Temperature_sensibility* (5.9)

Usage:

convection_diffusion_temperature *obj* Lire *obj* {

```
[ penalisation_l2_ftd pp ]
[ convection bloc_convection ]
[ diffusion bloc_diffusion ]
```

```

[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **penalisation_l2_ftd** *pp* (5.10): to activate or not (the default is Direct Forcing method) the Penalized Direct Forcing method to impose the specified temperature on the solid-fluid interface.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Example: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.30 convection_diffusion_temperature_ft_disc

Description: not_set

Keyword Discretize should have already been used to read the object.

See also: convection_diffusion_temperature (5.29)

Usage:

```

convection_diffusion_temperature_ft_disc obj Lire obj {
    [ equation_interface str]

```

```

phase int into [0, 1]
[ equation_navier_stokes str]
[ stencil_width int]
[ maintien_temperature objet_lecture_maintien_temperature]
[ penalisation_l2_ftd pp]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **equation_interface** *str*: The name of the interface equation should be given.
- **phase** *int* into [0, 1]: Phase in which the temperature equation will be solved. The temperature, which may be postprocessed with the keyword `temperature_EquationName`, in the other phase may be negative: the code only computes the temperature field in the specified phase. The other phase is supposed to physically stay at saturation temperature. The code uses a ghost fluid numerical method to work on a smooth temperature field at the interface. In the opposite phase (1-X) the temperature will therefore be extrapolated in the vicinity of the interface and have the opposite sign, saturation temperature is zero by convention).
- **equation_navier_stokes** *str*: The name of the Navier Stokes equation of the problem should be given.
- **stencil_width** *int*: distance in mesh elements over which the temperature field should be extrapolated in the opposite phase.
- **maintien_temperature** *objet_lecture_maintien_temperature* (5.31): `maintien_temperature SOUS_ZONE_NAME VALUE` : experimental, this acts as a dynamic source term that heats or cools the fluid to maintain the average temperature to `VALUE` within the specified region. At this time, this is done by multiplying the temperature within the `SOUS_ZONE` by an appropriate uniform value at each timestep. This feature might be implemented in a separate source term in the future.
- **penalisation_l2_ftd** *pp* (5.10) for inheritance: to activate or not (the default is Direct Forcing method) the Penalized Direct Forcing method to impose the specified temperature on the solid-fluid interface.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:

```

n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n

```

The created files are named : `pdbname_fieldname_[boundaryname]_time.dat`
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following

format: n_valeur
x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

{ equation_non_resolue (t>t0)*(t<t1) }

5.31 objet_lecture_maintien_temperature

Description: not_set

See also: objet_lecture (36)

Usage:

sous_zone temperature_moyenne

where

- **sous_zone** *str*
- **temperature_moyenne** *float*

5.32 convection_diffusion_temperature_turbulent

Description: Energy equation (temperature diffusion convection) as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

convection_diffusion_temperature_turbulent obj Lire obj {

```
[ modele_turbulence modele_turbulence_scal_base]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limiters condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
```

}

where

- **modele_turbulence** *modele_turbulence_scal_base* (25): Turbulence model for the energy equation.
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.

- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.33 eqn_base

Description: Basic class for equations.

Keyword Discretize should have already been used to read the object.

See also: mor_eqn (5) navier_stokes_standard (5.40) convection_diffusion_temperature (5.29) convection_diffusion_chaleur_qc (5.19) convection_diffusion_fraction_massique_mb_qc (5.24) convection_diffusion_concentration (5.21) convection_diffusion_fraction_massique_qc (5.26) Conduction (5.1) convection_diffusion_temperature_turbulent (5.32) convection_diffusion_fraction_massique_turbulent_qc (5.27) transport_k_epsilon (5.48) transport_interfaces_ft_disc (5.43) transport_marqueur_ft (5.49) Transport_K_Eps_Realisable (5.18) Navier_Stokes_std_ALE (5.17)

Usage:

```
eqn_base obj Lire obj {
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limites condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
```


}
where

- **convection** *bloc_convection* (5.2): Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3): Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4): Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1): Boundary conditions.
- **sources** *sources* (5.5): To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6): This keyword is used to write the values of a field only for some boundaries in a text file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6): This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7): Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str*: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.34 navier_stokes_ft_disc

Description: Two-phase momentum balance equation.

Keyword Discretize should have already been used to read the object.

See also: navier_stokes_turbulent (5.41)

Usage:

```
navier_stokes_ft_disc obj Lire obj {
    [ equation_interfaces_proprietes_fluide str]
    [ equation_interfaces_vitesse_imposee str]
    [ equations_interfaces_vitesse_imposee n word1 word2 ... wordn]
    [ clipping_courbure_interface int]
    [ terme_gravite str into ['rho_g', 'grad_i']]
    [ equation_temperature_mpoint str]
    [ matrice_pression_invariante ]
    [ penalisation_forage penalisation_forage]
    [ equation_temperature_mpoint_vapeur str]
    [ mpoint_inactif_sur_qdm ]
    [ mpoint_vapeur_inactif_sur_qdm ]
    [ modele_turbulence modele_turbulence_hyd_deriv]
```

```

[ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
_operateurs', 'sans_rien']]
[ projection_initiale int]
[ solveur_pression solveur_sys_base]
[ solveur_bar solveur_sys_base]
[ dt_projection deuxmots]
[ seuil_divU floatfloat]
[ traitement_particulier traitement_particulier]
[ correction_matrice_projection_initiale int]
[ correction_calcul_pression_initiale int]
[ correction_vitesse_projection_initiale int]
[ correction_matrice_pression int]
[ correction_vitesse_modifie int]
[ gradient_pression_qdm_modifie int]
[ correction_pression_modifie int]
[ postraiter_gradient_pression_sans_masse ]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **equation_interfaces_proprietes_fluide** *str*: This keyword is used for liquid-gas, liquid-vapor and fluid-fluid deformable interface, which transported at the Eulerian velocity. When this case is selected, the keyword sequence `Methode_transport vitesse_interpolee` is used in the block `Transport_Interfaces_FT_Disc` to define the velocity field for the displacement of the interface.
- **equation_interfaces_vitesse_imposee** *str*: This keyword is used to specify the velocity field to be used when using an interface that mimics a solid interface moving with a given solid speed of displacement. When this case is selected, the keyword sequence `Methode_transport vitesse_imposee` in the `Transport_Interfaces_FT_Disc` block will define the velocity field for the displacement of the interface.
- **equations_interfaces_vitesse_imposee** *n word1 word2 ... wordn*: This keyword is used to specify the velocity field to be used when using an interface that mimics a solid interface moving with a given solid speed of displacement. When this case is selected, the keyword sequence `Methode_transport vitesse_imposee` in the `Transport_Interfaces_FT_Disc` block will define the velocity field for the displacement of the interface. If two or more solid interfaces are defined, then the keyword `equations_interfaces_vitesse_imposee` should be used.
- **clipping_courbure_interface** *int*: This keyword is used to numerically limit the values of curvature used in the momentum balance equation. Curvature is computed as usual, but values exceeding the clipping value are replaced by this threshold, before using the clipped curvature in the momentum balance. Each time a curvature value is clipped, a counter is increased by one unity and the value of the counter is written in the `.err` file at the end of the time step. This clipping allows not reducing drastically the time stepping when a geometrical singularity occurs in the interface mesh. However, physical phenomena may be concealed with the use of such a clipping.
- **terme_gravite** *str into ['rho_g', 'grad_i']*: The `Terme_gravite` keyword changes the numerical scheme used for the gravity source term. The default is `grad_i`, which is designed to remove spurious currents around the interface. In this case, the pressure field does not contain the hydrostatic part

but only a jump across the interface. This scheme seems not to work very well in vef. The `rho_g` option uses the more traditional source term, equal to $\rho \cdot g$ in the volume. In this case, the hydrostatic pressure is visible in the pressure field and the boundary conditions in pressure must be set accordingly. This model produces spurious currents in the vicinity of the fluid-fluid interfaces and with the immersed boundary conditions.

- **equation_temperature_mpoint** *str*: The `equation_temperature_mpoint` should be used in the case of liquid-vapor flow with phase-change (see the `TRUST_ROOT/doc/TRUST/ft_chgt_phase.pdf` written in French for more information about the model). The name of the temperature equation, defined with the `convection_diffusion_temperature_ft_disc` keyword, should be given.
- **matrice_pression_invariante** : This keyword is a shortcut to be used only when the flow is a single-phase one, with interface tracking only used for solid-fluid interfaces. In this peculiar case, the density of the fluid does not evolve during the computation and the pressure matrix does not need to be actuated at each time step.
- **penalisation_forage** *penalisation_forage* (5.35): This keyword is used to specify a strong formulation (value set to 0) or a weak formulation (value set to 1) for an imposed pressure boundary condition. The first formulation converges quicker and is stable in general cases except some rare cases (see `Ecoulement_Neumann` test case for example) where the second one should be used despite of its slow convergence.
- **equation_temperature_mpoint_vapeur** *str*
- **mpoint_inactif_sur_qdm**
- **mpoint_vapeur_inactif_sur_qdm**
- **modele_turbulence** *modele_turbulence_hyd_deriv* (5.12) for inheritance: Turbulence model for Navier-Stokes equations.
- **methode_calcul_pression_initiale** *str* into [*'avec_les_cl'*, *'avec_sources'*, *'avec_sources_et_operateurs'*, *'sans_rien'*] for inheritance: Keyword to select an option for the pressure calculation before the first time step. Options are : `avec_les_cl` (default option `lapP=0` is solved with Neuman boundary conditions on pressure if any), `avec_sources` (`lapP=f` is solved with Neuman boundaries conditions and `f` integrating the source terms of the Navier-Stokes equations) and `avec_sources_et_operateurs` (`lapP=f` is solved as with the previous option `avec_sources` but `f` integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{Div}U=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and `Source_Qdm_lambdaup`). A file (`solveur.bar`) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: `nb` value : This keyword checks every `nb` time-steps the equality of velocity divergence to zero. `value` is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: `value factor` : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in `solveur_pression`) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value `seuil(tn+1)` will be evaluated as:
 If ($\text{lmax}(\text{Div}U) \cdot dt < \text{value}$)
 `Seuil(tn+1) = Seuil(tn) * factor`
 Else
 `Seuil(tn+1) = Seuil(tn) * factor`
 Endif
 The first parameter (`value`) is the mass evolution the user is ready to accept per timestep, and the second one (`factor`) is the factor of evolution for 'seuil' (for example 1.1, so 10

- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
 - **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
 - **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
 - **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
 - **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
 - **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF
 - **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
 - **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
 - **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
 - **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
 - **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
 - **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
 - **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
-
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
 - **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:

```
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format:

```
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
 - **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Example: The Navier-Stokes equations are not solved between time t0 and t1.

```
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }
```

5.35 penalisation_forcage

Description: penalisation_forcage

See also: objet_lecture (36)

Usage:

```
{
    [ pression_reference float]
```

```
[ domaine_flottant_fluide x1 x2 (x3)]
}
```

where

- **pression_reference** *float*
- **domaine_flottant_fluide** *x1 x2 (x3)*

5.36 navier_stokes_phase_field

Description: Navier Stokes equation for the Phase Field problem.

Keyword Discretize should have already been used to read the object.

See also: `navier_stokes_standard` (5.40)

Usage:

```
navier_stokes_phase_field obj Lire obj {
    approximation_de_boussinesq approx_boussinesq
    [ viscosite_dynamique_constant visco_dyn_cons]
    gravite n x1 x2 ... xn
    [ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
_operateurs', 'sans_rien']]
    [ projection_initiale int]
    [ solveur_pression solveur_sys_base]
    [ solveur_bar solveur_sys_base]
    [ dt_projection deuxmots]
    [ seuil_divU floatfloat]
    [ traitement_particulier traitement_particulier]
    [ correction_matrice_projection_initiale int]
    [ correction_calcul_pression_initiale int]
    [ correction_vitesse_projection_initiale int]
    [ correction_matrice_pression int]
    [ correction_vitesse_modifie int]
    [ gradient_pression_qdm_modifie int]
    [ correction_pression_modifie int]
    [ postraiter_gradient_pression_sans_masse ]
    [ convection bloc_convection]
    [ diffusion bloc_diffusion]
    [ initial_conditions|conditions_initiales condinits]
    [ boundary_conditions|conditions_limit condlims]
    [ sources sources]
    [ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
    [ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
    [ parametre_equation parametre_equation_base]
    [ equation_non_resolue str]
}
```

where

- **approximation_de_boussinesq** *approx_boussinesq* (5.37): To use or not the Boussinesq approximation.
- **viscosite_dynamique_constant** *visco_dyn_cons* (5.38): To use or not a viscosity which will depends on concentration C (in fact, C is the unknown of Cahn-Hilliard equation).
- **gravite** *n x1 x2 ... xn*: Keyword to define gravity in the case Boussinesq approximation is not used.

- **methode_calcul_pression_initiale** *str into* ['avec_les_cl', 'avec_sources', 'avec_sources_et_operateurs', 'sans_rien'] for inheritance: Keyword to select an option for the pressure calculation before the first time step. Options are : avec_les_cl (default option lapP=0 is solved with Neuman boundary conditions on pressure if any), avec_sources (lapP=f is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and avec_sources_et_operateurs (lapP=f is solved as with the previous option avec_sources but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks DivU=0. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and Source_Qdm_lambdaup). A file (solveur.bar) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: nb value : This keyword checks every nb time-steps the equality of velocity divergence to zero. value is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: value factor : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in solveur_pression) is dynamically adapted according to the mass conservation. At tn , the linear system Ax=B is considered as solved if the residual $\|Ax-B\| < \text{seuil}(tn)$. For tn+1, the threshold value $\text{seuil}(tn+1)$ will be evaluated as:
 If (lmax(DivU)*dt<value)
 Seuil(tn+1)= Seuil(tn)*factor
 Else
 Seuil(tn+1)= Seuil(tn)*factor
 Endif
 The first parameter (value) is the mass evolution the user is ready to accept per timestep, and the second one (factor) is the factor of evolution for 'seuil' (for example 1.1, so 10)
- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
- **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
- **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF
- **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
- **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
- **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is

used to write the values of a field only for some boundaries in a text file with the following format:

`n_valeur`

`x_1 y_1 [z_1] val_1`

...

`x_n y_n [z_n] val_n`

The created files are named : `pbname_fieldname_[boundaryname]_time.dat`

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: `n_valeur`

`x_1 y_1 [z_1] val_1`

...

`x_n y_n [z_n] val_n`

The created files are named : `pbname_fieldname_[boundaryname]_time.dat`

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if `equation_non_resolue` keyword is used. Exemple: The Navier-Stokes equations are not solved between time `t0` and `t1`.
`Navier_Sokes_Standard`
{ `equation_non_resolue (t>t0)*(t<t1)` }

5.37 approx_boussinesq

Description: different mass density formulation are available depending if the Boussinesq approximation is made or not

See also: `objet_lecture` (36)

Usage:

yes_or_no bloc_bouss

where

- **yes_or_no** *str* into ['oui', 'non']: To use or not the Boussinesq approximation.
- **bloc_bouss** *bloc_boussinesq* (5.37.1): to choose the rho formulation

5.37.1 bloc_boussinesq

Description: choice of rho formulation

See also: `objet_lecture` (36)

Usage:

{

[**rho_1** *float*]

[**rho_2** *float*]

[**rho_fonc_c** *bloc_rho_fonc_c*]

}

where

- **rho_1** *float*: value of rho
- **rho_2** *float*: value of rho
- **rho_fonc_c** *bloc_rho_fonc_c* (5.37.2): to use for define a general form for rho

5.37.2 bloc_rho_fonc_c

Description: if rho has a general form

See also: objet_lecture (36)

Usage:

```
[ Champ_Fonc_Fonction ] [ concentration ] [ dim ] [ val ] [ Champ_Uniforme ] [ fielddim ] [ val2 ]  
where
```

- **Champ_Fonc_Fonction** *str into* [*'Champ_Fonc_Fonction'*]: Champ_Fonc_Fonction
- **concentration** *str into* [*'concentration'*]: concentration
- **dim** *int*: dimension of the problem
- **val** *str*: function of rho
- **Champ_Uniforme** *str into* [*'Champ_Uniforme'*]: Champ_Uniforme
- **fielddim** *int*: dimension of the problem
- **val2** *str*: function of rho

5.38 visco_dyn_cons

Description: different treatment of the kinematic viscosity could be done depending of the use of the Boussinesq approximation or the constant dynamic viscosity approximation

See also: objet_lecture (36)

Usage:

```
yes_or_no bloc_visco  
where
```

- **yes_or_no** *str into* [*'oui'*, *'non'*]: To use or not the constant dynamic viscosity
- **bloc_visco** *bloc_visco2* (5.38.1): to choose the mu formulation

5.38.1 bloc_visco2

Description: choice of mu formulation

See also: objet_lecture (36)

Usage:

```
{  
    [ mu_1 float]  
    [ mu_2 float]  
    [ mu_fonc_c bloc_mu_fonc_c]  
}  
where
```

- **mu_1** *float*: value of mu
- **mu_2** *float*: value of mu
- **mu_fonc_c** *bloc_mu_fonc_c* (5.38.2): to use for define a general form for mu

5.38.2 bloc_mu_fonc_c

Description: if mu has a general form

See also: objet_lecture (36)

Usage:

```
[ Champ_Fonc_Fonction ] [ concentration ] [ dim ] [ val ]
```

where

- **Champ_Fonc_Fonction** *str* into [*Champ_Fonc_Fonction*]: Champ_Fonc_Fonction
- **concentration** *str* into [*concentration*]: concentration
- **dim** *int*: dimension of the problem
- **val** *str*: function of mu

5.39 navier_stokes_qc

Description: Navier-Stokes equations under low Mach number.

Keyword Discretize should have already been used to read the object.

See also: navier_stokes_standard (5.40)

Usage:

```
navier_stokes_qc obj Lire obj {
```

```
    [ methode_calcul_pression_initiale  str into [avec_les_cl, avec_sources, avec_sources_et-
      _operateurs, sans_rien] ]
    [ projection_initiale  int ]
    [ solveur_pression  solveur_sys_base ]
    [ solveur_bar  solveur_sys_base ]
    [ dt_projection  deuxmots ]
    [ seuil_divU  floatfloat ]
    [ traitement_particulier  traitement_particulier ]
    [ correction_matrice_projection_initiale  int ]
    [ correction_calcul_pression_initiale  int ]
    [ correction_vitesse_projection_initiale  int ]
    [ correction_matrice_pression  int ]
    [ correction_vitesse_modifie  int ]
    [ gradient_pression_qdm_modifie  int ]
    [ correction_pression_modifie  int ]
    [ postraiter_gradient_pression_sans_masse ]
    [ convection  bloc_convection ]
    [ diffusion  bloc_diffusion ]
    [ initial_conditions|conditions_initiales  condinits ]
    [ boundary_conditions|conditions_limites  condlims ]
    [ sources  sources ]
    [ ecrire_fichier_xyz_valeur  ecrire_fichier_xyz_valeur_param ]
    [ ecrire_fichier_xyz_valeur_bin  ecrire_fichier_xyz_valeur_param ]
    [ parametre_equation  parametre_equation_base ]
    [ equation_non_resolue  str ]
```

```
}
```

where

- **methode_calcul_pression_initiale** *str into* ['avec_les_cl', 'avec_sources', 'avec_sources_et_operateurs', 'sans_rien'] for inheritance: Keyword to select an option for the pressure calculation before the first time step. Options are : avec_les_cl (default option lapP=0 is solved with Neuman boundary conditions on pressure if any), avec_sources (lapP=f is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and avec_sources_et_operateurs (lapP=f is solved as with the previous option avec_sources but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{DivU}=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and Source_Qdm_lambdaup). A file (solveur.bar) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: nb value : This keyword checks every nb time-steps the equality of velocity divergence to zero. value is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: value factor : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in solveur_pression) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value $\text{seuil}(t_{n+1})$ will be evaluated as:
 If ($\text{lmax}(\text{DivU}) \cdot dt < \text{value}$)
 Seuil(t_{n+1}) = Seuil(t_n) * factor
 Else
 Seuil(t_{n+1}) = Seuil(t_n) * factor
 Endif
 The first parameter (value) is the mass evolution the user is ready to accept per timestep, and the second one (factor) is the factor of evolution for 'seuil' (for example 1.1, so 10)
- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
- **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
- **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF
- **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
- **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
- **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is

used to write the values of a field only for some boundaries in a text file with the following format:

```
n_valeur
x_1 y_1 [z_1] val_1
```

...

```
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

```
x_1 y_1 [z_1] val_1
```

...

```
x_n y_n [z_n] val_n
```

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

```
Navier_Sokes_Standard
```

```
{ equation_non_resolue (t>t0)*(t<t1) }
```

5.40 navier_stokes_standard

Description: Navier-Stokes equations.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33) navier_stokes_qc (5.39) navier_stokes_turbulent (5.41) navier_stokes_phase_field (5.36) Navier_Stokes_standard_sensibility (5.13)

Usage:

```
navier_stokes_standard obj Lire obj {
```

```
  [ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
    _operateurs', 'sans_rien']]
```

```
  [ projection_initiale int]
```

```
  [ solveur_pression solveur_sys_base]
```

```
  [ solveur_bar solveur_sys_base]
```

```
  [ dt_projection deuxmots]
```

```
  [ seuil_divU floatfloat]
```

```
  [ traitement_particulier traitement_particulier]
```

```
  [ correction_matrice_projection_initiale int]
```

```
  [ correction_calcul_pression_initiale int]
```

```
  [ correction_vitesse_projection_initiale int]
```

```
  [ correction_matrice_pression int]
```

```
  [ correction_vitesse_modifie int]
```

```
  [ gradient_pression_qdm_modifie int]
```

```
  [ correction_pression_modifie int]
```

```
  [ postraiter_gradient_pression_sans_masse ]
```

```
  [ convection bloc_convection]
```

```
  [ diffusion bloc_diffusion]
```

```
  [ initial_conditions|conditions_initiales condinits]
```

```
  [ boundary_conditions|conditions_limites condlims]
```

```
  [ sources sources]
```

```

[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **methode_calcul_pression_initiale** *str* into [*'avec_les_cl'*, *'avec_sources'*, *'avec_sources_et_operateurs'*, *'sans_rien'*]: Keyword to select an option for the pressure calculation before the first time step. Options are : *avec_les_cl* (default option $\text{lapP}=0$ is solved with Neuman boundary conditions on pressure if any), *avec_sources* ($\text{lapP}=f$ is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and *avec_sources_et_operateurs* ($\text{lapP}=f$ is solved as with the previous option *avec_sources* but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int*: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{DivU}=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (5.17): Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (5.17): This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and *Source_Qdm_lambdaup*). A file (*solveur.bar*) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14): *nb* value : This keyword checks every *nb* time-steps the equality of velocity divergence to zero. *value* is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15): *value* factor : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in *solveur_pression*) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value $\text{seuil}(t_{n+1})$ will be evaluated as:
 If ($\text{lmax}(\text{DivU}) * dt < \text{value}$)
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) * \text{factor}$
 Else
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) * \text{factor}$
 Endif
 The first parameter (*value*) is the mass evolution the user is ready to accept per timestep, and the second one (*factor*) is the factor of evolution for 'seuil' (for example 1.1, so 10)
- **traitement_particulier** *traitement_particulier* (5.16): Keyword to post-process particular values.
- **correction_matrice_projection_initiale** *int*: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int*: (IBM advanced) fix initial pressure computation for PDF
- **correction_vitesse_projection_initiale** *int*: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int*: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int*: (IBM advanced) fix velocity for PDF
- **gradient_pression_qdm_modifie** *int*: (IBM advanced) fix pressure gradient
- **correction_pression_modifie** *int*: (IBM advanced) fix pressure for PDF
- **postraiter_gradient_pression_sans_masse** : (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.

- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.41 navier_stokes_turbulent

Description: Navier-Stokes equations as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.

See also: navier_stokes_standard (5.40) navier_stokes_turbulent_qc (5.42) navier_stokes_ft_disc (5.34)

Usage:

```
navier_stokes_turbulent obj Lire obj {
    [ modele_turbulence modele_turbulence_hyd_deriv]
    [ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
_operateurs', 'sans_rien']]
    [ projection_initiale int]
    [ solveur_pression solveur_sys_base]
    [ solveur_bar solveur_sys_base]
    [ dt_projection deuxmots]
    [ seuil_divU floatfloat]
    [ traitement_particulier traitement_particulier]
    [ correction_matrice_projection_initiale int]
    [ correction_calcul_pression_initiale int]
    [ correction_vitesse_projection_initiale int]
    [ correction_matrice_pression int]
    [ correction_vitesse_modifie int]
    [ gradient_pression_qdm_modifie int]
    [ correction_pression_modifie int]
    [ postraiter_gradient_pression_sans_masse ]
    [ convection bloc_convection]
```

```

[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinitis]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **modele_turbulence** *modele_turbulence_hyd_deriv* (5.12): Turbulence model for Navier-Stokes equations.
- **methode_calcul_pression_initiale** *str* into [*'avec_les_cl'*, *'avec_sources'*, *'avec_sources_et_operateurs'*, *'sans_rien'*] for inheritance: Keyword to select an option for the pressure calculation before the first time step. Options are : *avec_les_cl* (default option $\text{lapP}=0$ is solved with Neuman boundary conditions on pressure if any), *avec_sources* ($\text{lapP}=f$ is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and *avec_sources_et_operateurs* ($\text{lapP}=f$ is solved as with the previous option *avec_sources* but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{DivU}=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and *Source_Qdm_lambdaup*). A file (*solveur.bar*) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: *nb* value : This keyword checks every *nb* time-steps the equality of velocity divergence to zero. *value* is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: *value factor* : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in *solveur_pression*) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value $\text{seuil}(t_{n+1})$ will be evaluated as:
 If ($\text{lmax}(\text{DivU}) \cdot dt < \text{value}$)
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) \cdot \text{factor}$
 Else
 $\text{Seuil}(t_{n+1}) = \text{Seuil}(t_n) \cdot \text{factor}$
 Endif
 The first parameter (*value*) is the mass evolution the user is ready to accept per timestep, and the second one (*factor*) is the factor of evolution for 'seuil' (for example 1.1, so 10)
- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
- **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
- **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
- **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
- **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
- **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF

- **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
 - **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
 - **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
 - **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
 - **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
 - **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
 - **boundary_conditions|conditions_limite** *condlims* (4.14.1) for inheritance: Boundary conditions.
-
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
 - **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
 - **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.42 navier_stokes_turbulent_qc

Description: Navier-Stokes equations under low Mach number as well as the associated turbulence model equations.

Keyword Discretize should have already been used to read the object.

See also: navier_stokes_turbulent (5.41)

Usage:

navier_stokes_turbulent_qc obj Lire obj {

```
[ modele_turbulence modele_turbulence_hyd_deriv]
[ methode_calcul_pression_initiale str into ['avec_les_cl', 'avec_sources', 'avec_sources_et-
_operateurs', 'sans_rien']]
[ projection_initiale int]
[ solveur_pression solveur_sys_base]
[ solveur_bar solveur_sys_base]
[ dt_projection deuxmots]
[ seuil_divU floatfloat]
```



```

[ traitement_particulier traitement_particulier]
[ correction_matrice_projection_initiale int]
[ correction_calcul_pression_initiale int]
[ correction_vitesse_projection_initiale int]
[ correction_matrice_pression int]
[ correction_vitesse_modifie int]
[ gradient_pression_qdm_modifie int]
[ correction_pression_modifie int]
[ postraiter_gradient_pression_sans_masse ]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}

```

where

- **modele_turbulence** *modele_turbulence_hyd_deriv* (5.12) for inheritance: Turbulence model for Navier-Stokes equations.
- **methode_calcul_pression_initiale** *str* into [*'avec_les_cl'*, *'avec_sources'*, *'avec_sources_et_operateurs'*, *'sans_rien'*] for inheritance: Keyword to select an option for the pressure calculation before the first time step. Options are : *avec_les_cl* (default option $\text{lapP}=0$ is solved with Neuman boundary conditions on pressure if any), *avec_sources* ($\text{lapP}=f$ is solved with Neuman boundaries conditions and f integrating the source terms of the Navier-Stokes equations) and *avec_sources_et_operateurs* ($\text{lapP}=f$ is solved as with the previous option *avec_sources* but f integrating also some operators of the Navier-Stokes equations). The two last options are useful and sometime necessary when source terms are implicated when using an implicit time scheme to solve the Navier-Stokes equations.
- **projection_initiale** *int* for inheritance: Keyword to suppress, if boolean equals 0, the initial projection which checks $\text{DivU}=0$. By default, boolean equals 1.
- **solveur_pression** *solveur_sys_base* (10.17) for inheritance: Linear pressure system resolution method.
- **solveur_bar** *solveur_sys_base* (10.17) for inheritance: This keyword is used to define when filtering operation is called (typically for EF convective scheme, standard diffusion operator and *Source_Qdm_lambdaup*). A file (*solveur.bar*) is then created and used for inversion procedure. Syntax is the same then for pressure solver (GCP is required for multi-processor calculations and, in a general way, for big meshes).
- **dt_projection** *deuxmots* (5.14) for inheritance: *nb value* : This keyword checks every *nb* time-steps the equality of velocity divergence to zero. *value* is the criteria convergency for the solver used.
- **seuil_divU** *floatfloat* (5.15) for inheritance: *value factor* : this keyword is intended to minimise the number of iterations during the pressure system resolution. The convergence criteria during this step ('seuil' in *solveur_pression*) is dynamically adapted according to the mass conservation. At t_n , the linear system $Ax=B$ is considered as solved if the residual $\|Ax-B\| < \text{seuil}(t_n)$. For t_{n+1} , the threshold value $\text{seuil}(t_{n+1})$ will be evaluated as:
 If ($\text{lmax}(\text{DivU}) \cdot dt < \text{value}$)
 Seuil(t_{n+1})= Seuil(t_n)*factor
 Else
 Seuil(t_{n+1})= Seuil(t_n)*factor
 Endif
 The first parameter (*value*) is the mass evolution the user is ready to accept per timestep, and the second one (*factor*) is the factor of evolution for 'seuil' (for example 1.1, so 10

- **traitement_particulier** *traitement_particulier* (5.16) for inheritance: Keyword to post-process particular values.
 - **correction_matrice_projection_initiale** *int* for inheritance: (IBM advanced) fix matrix of initial projection for PDF
 - **correction_calcul_pression_initiale** *int* for inheritance: (IBM advanced) fix initial pressure computation for PDF
 - **correction_vitesse_projection_initiale** *int* for inheritance: (IBM advanced) fix initial velocity computation for PDF
 - **correction_matrice_pression** *int* for inheritance: (IBM advanced) fix pressure matrix for PDF
 - **correction_vitesse_modifie** *int* for inheritance: (IBM advanced) fix velocity for PDF
 - **gradient_pression_qdm_modifie** *int* for inheritance: (IBM advanced) fix pressure gradient
 - **correction_pression_modifie** *int* for inheritance: (IBM advanced) fix pressure for PDF
 - **postraiter_gradient_pression_sans_masse** for inheritance: (IBM advanced) avoid mass matrix multiplication for the gradient postprocessing
 - **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
 - **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
 - **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
 - **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
-
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
 - **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
 - **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
 - **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.43 transport_interfaces_ft_disc

Description: Interface tracking equation for Front-Tracking problem in the discontinuous version.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

transport_interfaces_ft_disc obj Lire obj {

```

[ initial_conditions|conditions_initiales bloc_lecture]
[ methode_transport methode_transport_deriv]
[ iterations_correction_volume int]
[ n_iterations_distance int]
[ maillage str]
[ remaillage bloc_lecture_remaillage]
[ collisions str]
[ methode_interpolation_v str into ['valeur_a_elem', 'vdf_lineaire']]
[ volume_impose_phase_1 float]
[ parcours_interface parcours_interface]
[ interpolation_repere_local ]
[ interpolation_champ_face interpolation_champ_face_deriv]
[ n_iterations_interpolation_ibc int]
[ type_vitesse_imposee str into ['uniforme', 'analytique']]
[ nombre_facettes_retenues_par_cellule int]
[ seuil_convergence_uzawa float]
[ nb_iteration_max_uzawa int]
[ injecteur_interfaces str]
[ vitesse_imposee_regularisee int]
[ indic_faces_modifiee bloc_lecture]
[ distance_projete_faces str into ['simplifiee', 'initiale', 'modifiee']]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]

```

}
where

- **initial_conditions|conditions_initiales** *bloc_lecture* (3.9): The keyword `conditions_initiales` is used to define the shape of the initial interfaces through the zero level-set of a function, or through a mesh `fichier_geom`. Indicator function is set to 0, that is `fluide0`, where the function is negative; indicator function is set to 1, that is `fluide1`, where the function is positive; the interfaces are the level-set 0 of that function:

```

conditions_initiales { fonction
  
$$-((x-0.002)^2 + (y-0.002)^2 + z^2 - (0.00125)^2) * ((x-0.005)^2 + (y-0.007)^2 + z^2 - (0.00150)^2) * (0.020 - z)$$

}

```

In the above example, there are three interfaces: two bubbles in a liquid with a free surface. One bubble has a radius of 0.00125, i.e. 1.25 mm, and its center is {0.002, 0.002, 0.000}. The other bubble has a radius of 0.00150, i.e. 1.5 mm, and its center is {0.005, 0.007, 0.000}. The free surface is above the two bubble, at a level $z=0.02$.

Additional feature in this block concerns the keywords `ajout_phase0` and `ajout_phase1`. They can be used to simplify the composition of different interfaces. When using these keywords, the initial function defines the indicator function; `ajout_phase0` and `ajout_phase1` are used to modify this initial field. Each time `ajout_phase0` is used, the field is untouched where the function is positive whereas the indicator field is set to 0 where the function is negative. The keyword `ajout_phase1` has the symmetrical use, keeping the field value where the function is negative and setting the indicator field to

1 where the function is positive. The previous example can also be written:

```
conditions_initiales {
fonction z-0.020 , NL fonction ajout_phase1  $(x - 0.002)^2 + (y - 0.002)^2 + z^2 - (0.00125)^2$  ,
fonction ajout_phase1  $(x - 0.005)^2 + (y - 0.007)^2 + z^2 - (0.00150)^2$ 
}
```

- **methode_transport** *methode_transport_deriv* (5.44): Method of transport of interface.
- **iterations_correction_volume** *int*: Keyword to specify the number of iterations requested for the correction process that can be used to keep the volume of the phases constant during the transport process.
- **n_iterations_distance** *int*: Keyword to specify the number of iterations requested for the smoothing process of computing the field corresponding to the signed distance to the interfaces and located at the center of the Eulerian elements. This smoothing is necessary when there are more Lagrangian nodes than Eulerian two-phase cells.
- **maillage** *str*: This optional block is used to specify that we want a Gnuplot drawing of the initial mesh. There is only one keyword, *niveau_plot*, that is used only to define if a Gnuplot drawing is active (value 1) or not active (value -1). By default, skipping the block will produce non Gnuplot drawing. This option is to be used only in a debug process.
- **remaillage** *bloc_lecture_remaillage* (5.45): This block is used to specify the operations that are used to keep the solid interfaces in a proper condition. The remaillage block only contains parameter's values.
- **collisions** *str*: This block is used to specify the operations that are used when a collision occurs between two parts of interfaces. When this occurs, it is necessary to build a new mesh that has locally a clear definition of what is inside and what is outside of the mesh. The collisions can either be active or inactive. If the collisions are active (highly recommended), the keyword *juric_pour_tout* indicates that the Juric level-set reconstruction method will be used to re-create the new mesh after each coalescence or breakup. The next line (*type_remaillage*) is used to state whose field will be used for the level-set computation. Main option is Juric, a remeshing that is compatible with parallel computing. When using Juric level-set remeshing, the source field (*source_isevaleur*) that is used to compute the level-sets is then defined. It can be either the indicator function (*indicatrice*), a choice which is the default one and the most robust, or a geometrical distance computed from the mesh at the beginning of the time step (*fonction_distance*), a choice that may be more accurate in specific situations.

Type_remaillage Thomas is an enhancement of the Juric global remeshing algorithm designed to compensate for mass loss during remeshing. The mesh is always reconstructed with the indicator function (not with the distance function). After having reconstructed the mesh with the Juric algorithm, the difference between the old indicator function (before remeshing) and the new indicator function is computed. The differences occurring at a distance below or equal to N elements from the interface are summed up and used to move the interface in the normal direction. The displacement of the interface is such that the volume of each phase after displacement is equal to the volume of the phase before remeshing. N (default value 1) must be smaller than *n_iterations_distance* (suggested value: 2).

An alternate choice for the remeshing type (*type_remaillage*) is *collision_seq*, which is more complex and tries to sew the two meshes that have collided, once the collision zone has been removed. This algorithm does not work in parallel computation.

- **methode_interpolation_v** *str* into [*'valeur_a_elem'*, *'vdf_lineaire'*]: In this block, two keywords are possible for method to select the way the interpolation is performed. With the choice *valeur_a_elem* the speed of displacement of the nodes of the interfaces is the velocity at the center of the Eulerian element in which each node is located at the beginning of the time step. This choice is the default interpolation method. The choice VDF_lineaire is only available with a VDF discretization (VDF). In this case, the speed of displacement of the nodes of the interfaces is linearly interpolated on the 4 (in 2D) or the 6 (in 3D) Eulerian velocities closest the location of each node at the beginning of the time step. In peculiar situation, this choice may provide a better interpolated value. Of course, this choice is not available with a VEF discretization (VEFPreP1B).

- **volume_impose_phase_1** *float*: this keyword is used to specify the volume of one phase to keep the volume of the phases constant during the remeshing process. It is an alternate solution to trouble in mass conservation. This option is mainly realistic when only one inclusion of phase 1 is present in the domain. In most other situations, the `iterations_correction_volume` keyword seems easier to justify. The volume to be keep is in m3 and should agree with initial condition.
- **parcours_interface** *parcours_interface* (5.46): `Parcours_interface` allows you to configure the algorithm that computes the surface mesh to volume mesh intersection. This algorithm has some serious trouble when the surface mesh points coincide with some faces of the volume mesh. Effects are visible on the indicator function, in VDF when a plane interface coincides with a volume mesh surface. To overcome these problems, the keyword `correction_parcours_thomas` keyword can be used: it allows the algorithm to slightly move some mesh points. This algorithm is experimental and is NOT activated by default.
- **interpolation_repere_local** : Triggers a new transport algorithm for the interface: the velocity vector of lagrangian nodes is computed in the moving frame of reference of the center of each connex component, in such a way that relative displacements of nodes within a connex component of the lagrangian mesh are minimized, hence reducing the necessity of barycentering, smooting and local remeshing. Very efficient for bubbly flows.
- **interpolation_champ_face** *interpolation_champ_face_deriv* (5.47): It is possible to compute the imposed velocity for the solid-fluid interface by direct affectation (`interpolation_scheme` would be set to `base`) or by multi-linear interpolation (`interpolation_scheme` would be set to `lineaire`). The default value is `base`.
- **n_iterations_interpolation_ibc** *int*: Useful only with `interpolation_champ_face` positioned to `lineaire`. Set the value concerning the width of the region of the linear interpolation. For the Penalized Direct Forcing model, a value equals to 1 is enough.
- **type_vitesse_imposee** *str* into [`'uniforme'`, `'analytique'`]: Useful only with `interpolation_champ_face` positioned to `lineaire`. Value of the keyword is `uniforme` (for an uniform solid-fluid interface's velocity, i.e. zero for instance) or `analytique` (for an analytic expression of the solid-fluid interface's velocity depending on the spatial coordinates). The default value is `uniforme`.
- **nombre_facettes_retenues_par_cellule** *int*: Keyword to specify the default number (3) of facets per cell used to describe the geometry of the solid-solid interface. This number should be increased if the geometry of the solid-solid interface is complex in each cell (eulerian mesh too coarse for example).
- **seuil_convergence_uzawa** *float*: Optional option to change the default value (10-8) of the threshold convergence for the Uzawa algorithm if used in the Penalized Direct Forcing model. Sometime, the value should be decreased to insure a better convergence to force equality between sequential and parallel results.
- **nb_iteration_max_uzawa** *int*: Optional option to change the default value (10-8) of the threshold convergence for the Uzawa algorithm if used in the Penalized Direct Forcing model. Sometime, the value should be decreased to insure a better convergence to force equality between sequential and parallel results.
- **injecteur_interfaces** *str*
- **vitesse_imposee_regularisee** *int*
- **indic_faces_modifiee** *bloc_lecture* (3.9)
- **distance_projeete_faces** *str* into [`'simplifiee'`, `'initiale'`, `'modifiee'`]
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format: `n_valeur`

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur

x_1 y_1 [z_1] val_1

...

x_n y_n [z_n] val_n

The created files are named : pbname_fieldname_[boundaryname]_time.dat

- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.

Navier_Sokes_Standard

{ equation_non_resolue (t>t0)*(t<t1) }

5.44 methode_transport_deriv

Description: Basic class for method of transport of interface.

See also: objet_lecture (36) loi_horaire (5.44.1) vitesse_imposee (5.44.2) vitesse_interpolee (5.44.3)

Usage:

methode_transport_deriv

5.44.1 loi_horaire

Description: not_set

See also: methode_transport_deriv (5.44)

Usage:

loi_horaire nom_loi

where

- **nom_loi** *str*

5.44.2 vitesse_imposee

Description: Class to specify that the speed of displacement of the nodes of the interfaces is imposed with an analytical formula.

See also: methode_transport_deriv (5.44)

Usage:

vitesse_imposee val

where

- **val** *word1 word2 (word3)*: Analytical formula.

5.44.3 vitesse_interpolee

Description: Class to specify that the interpolation will use the velocity field of the Navier-Stokes equation named *val* to compute the speed of displacement of the nodes of the interfaces.

See also: *methode_transport_deriv* (5.44)

Usage:

vitesse_interpolee *val*
where

- **val** *str*: Navier-Stokes equation.

5.45 bloc_lecture_remaillage

Description: Parameters for remeshing.

See also: *objet_lecture* (36)

Usage:

```
{  
    [ pas float]  
    [ pas_lissage float]  
    [ nb_iter_remaillage int]  
    [ nb_iter_barycentrage int]  
    [ relax_barycentrage float]  
    [ critere_arete float]  
    [ critere_remaillage float]  
    [ impr float]  
    [ facteur_longueur_ideale float]  
    [ nb_iter_correction_volume int]  
    [ seuil_dvolume_residuel float]  
    [ lissage_courbure_coeff float]  
    [ lissage_courbure_iterations int]  
    [ lissage_courbure_iterations_systematique int]  
    [ lissage_courbure_iterations_si_remaillage int]  
    [ critere_longueur_fixe float]  
}
```

where

- **pas** *float*: This keyword has default value -1.; when it is set to a negative value there is no remeshing. It is the time step in second (physical time) between two operations of remeshing.
- **pas_lissage** *float*: This keyword has default value -1.; when it is set to a negative value there is no smoothing of mesh. It is the time step in second (physical time) between two operations of smoothing of the mesh.
- **nb_iter_remaillage** *int*: This keyword has default value 0; when it is set to the zero value there is no remeshing. It is the number of iterations performed during a remeshing process.
- **nb_iter_barycentrage** *int*: This keyword has default value 0; when it is set to the zero value there is no operation of barycentrage. The barycentrage operation consists in moving each node of the mesh tangentially to the mesh surface and in a direction that let it closer the center of gravity of its neighbors. If **relax_barycentrage** is set to 1, the node is move to the center of gravity. For values lower than unity, the motion is limited to the corresponding fraction. The parameter **nb_iter_barycentrage** is the number of iteration of these node displacements.

- **relax_barycentrage** *float*: This keyword has default value 0; when it is set to the zero value there is no motion of the nodes. When $0 < \text{relax_barycentrage} \leq 1$, this parameter provides the relaxation ratio to be used in the barycentrage operation described for the keyword `nb_iter_barycentrage`.
- **critere_arete** *float*: This keyword is used to compute two sub-criteria : the minimum and the maximum edge length ratios used in the process of obtaining edges of length close to `critere_longueur_fixe`. Their respective values are set to $(1 - \text{critere_arete})^{**2}$ and $(1 + \text{critere_arete})^{**2}$. The default values of the minimum and the maximum are set respectively to 0.5 and 1.5. When an edge is longer than $\text{critere_longueur_fixe} * (1 + \text{critere_arete})^{**2}$, the edge is cut into two pieces; when its length is smaller than $\text{critere_longueur_fixe} * (1 - \text{critere_arete})^{**2}$, this edge has to be suppressed.
- **critere_remaillage** *float*: This keyword was previously used to compute two sub-criteria : the minimum and the maximum length used in the process of remeshing. Their respective values are set to $(1 - \text{critere_remaillage})^{**2}$ and $(1 + \text{critere_remaillage})^{**2}$. The default values of the minimum and the maximum are set respectively to 0.2 and 1.7. There are currently not used in data files.
- **impr** *float*: This keyword is followed by a value that specify the printing time period given. The default value is -1, which means no printing.
- **facteur_longueur_ideale** *float*: This keyword is used to set a ratio between edge length and the cube root of volume cell for the remeshing process. The default value is 1.0.
- **nb_iter_correction_volume** *int*: This keyword give the maximum number of iterations to be performed trying to satisfy the criterion `seuil_dvolume_residuel`. The default value is 0, which means no iteration.
- **seuil_dvolume_residuel** *float*: This keyword give the error volume (in m3) that is accepted to stop the iterations performed to keep the volume constant during the remeshing process. The default value is 0.0.
- **lissage_courbure_coeff** *float*: This keyword is used to specify the diffusion coefficient used in the diffusion process of the curvature in the curvature smoothing process with a time step. The default value is 0.05. That value usually provides a stable process. Too small values do not stabilize enough the interface, especially with several Lagrangian nodes per Eulerian cell. Too high values induce an additional macroscopic smoothing of the interface that should physically come from the surface tension and not from this numerical smoothing.
- **lissage_courbure_iterations** *int*: This keyword is used to specify the number of iterations to perform the curvature smoothing process. The default value is 1.
- **lissage_courbure_iterations_systematique** *int*: These keywords allow a finer control than the previous `lissage_courbure_iterations` keyword. N1 iterations are applied systematically at each timestep. For proper DNS computation, N1 should be set to 0.
- **lissage_courbure_iterations_si_remaillage** *int*: N2 iterations are applied only if the local or the global remeshing effectively changes the lagrangian mesh connectivity.
- **critere_longueur_fixe** *float*: This keyword is used to specify the ideal edge length for a remeshing process. The default value is -1., which means that the remeshing does not try to have all edge lengths to tend towards a given value.

5.46 parours_interface

Description: allows you to configure the algorithm that computes the surface mesh to volume mesh intersection. This algorithm has some serious trouble when the surface mesh points coincide with some faces of the volume mesh. Effects are visible on the indicator function, in VDF when a plane interface coincides with a volume mesh surface.

To overcome these problems, the keyword `correction_parours_thomas` keyword can be used: it allows the algorithm to slightly move some mesh points. This algorithm, which is experimental and is NOT activated by default, triggers a correction that avoids some errors in the computation of the indicator function for surface meshes that exactly cross some eulerian mesh edges (strongly suggested !).

See also: `objet_lecture` (36)

Usage:

```
{
    [ correction_parcours_thomas ]
}
where
```

- **correction_parcours_thomas**

5.47 interpolation_champ_face_deriv

Description: not_set

See also: objet_lecture (36) base (5.47.1) lineaire (5.47.2)

Usage:

5.47.1 base

Description: not_set

See also: interpolation_champ_face_deriv (5.47)

Usage:

base

5.47.2 lineaire

Description: not_set

See also: interpolation_champ_face_deriv (5.47)

Usage:

lineaire {

```
    [ vitesse_fluide_explicite ]
```

```
}
```

where

- **vitesse_fluide_explicite**

5.48 transport_k_epsilon

Description: The (k-eps) transport equation. To resume from a previous mixing length calculation, an external MED-format file containing reconstructed K and Epsilon quantities can be read (see fichier_ecriture_k_eps) thanks to the Champ_fonc_MED keyword.

Warning, When used with the Quasi-compressible model, k and eps should be viewed as rho k and rho epsilon when defining initial and boundary conditions or when visualizing values for k and eps. This bug will be fixed in a future version.

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

transport_k_epsilon obj Lire obj {


```

[ with_nu str into ['yes', 'no']]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ initial_conditions|conditions_initiales condinits]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}
where

```

- **with_nu** *str* into ['yes', 'no']: yes/no
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.
- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **initial_conditions|conditions_initiales** *condinits* (5.4) for inheritance: Initial conditions.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.49 transport_marqueur_ft

Description: not_set

Keyword Discretize should have already been used to read the object.

See also: eqn_base (5.33)

Usage:

transport_marqueur_ft obj Lire obj {

```

[ initial_conditions|conditions_initiales bloc_lecture]
[ injection injection_marqueur]
[ transformation_bulles bloc_lecture]
[ phase_marquee int]
[ methode_transport str into ['vitesse_interpolee', 'vitesse_particules']]
[ methode_couplage str into ['suivi', 'one_way_coupling', 'two_way_coupling']]
[ nb_iterations int]
[ contribution_one_way int into [0, 1]]
[ implicite int into [0, 1]]
[ convection bloc_convection]
[ diffusion bloc_diffusion]
[ boundary_conditions|conditions_limites condlims]
[ sources sources]
[ ecrire_fichier_xyz_valeur ecrire_fichier_xyz_valeur_param]
[ ecrire_fichier_xyz_valeur_bin ecrire_fichier_xyz_valeur_param]
[ parametre_equation parametre_equation_base]
[ equation_non_resolue str]
}

```

where

- **initial_conditions|conditions_initiales** *bloc_lecture* (3.9): ne semble pas standard
- **injection** *injection_marqueur* (5.50): The keyword injection can be used to inject periodically during the calculation some other particles. The syntax for ensemble_points and proprietes_particles is the same than the initial conditions for the particles. The keyword t_debut_injection give the injection initial time (by default, given by t_debut_integration) and dt_injection gives the injection time period (by default given by dt_min).
- **transformation_bulles** *bloc_lecture* (3.9): This keyword will activate the transformation of an inclusion (small bubbles) into a particle. localisation gives the sub-zones (N number of sub-zones and their names) where the transformation may happen. The diameter size for the inclusion transformation is given by either diameter_min option, in this case the inclusion will be suppressed for a diameter less than diameter_size, either by the beta_transfo option, in this case the inclusion will be suppressed for a diameter less than diameter_size*cell_volume (cell_volume is the volume of the cell containing the inclusion). interface specifies the name of the inclusion interface and t_debut_transfo is the beginning time for the inclusion transformation operation (by default, it is t_debut_integr value) and dt_transfo is the period transformation (by default, it is dt_min value). In a two phase flow calculation, the particles will be suppressed when entering into the non marked phase
- **phase_marquee** *int*: Phase number giving the marked phase, where the particles are located (when they leave this phase, they are suppressed). By default, for a the two phase fluide, the particles are supposed to be into the phase 0 (liquid).
- **methode_transport** *str* into ['vitesse_interpolee', 'vitesse_particules']: Kind of transport method for the particles. With vitesse_interpolee, the velocity of the particles is the velocity a fluid interpolation velocity (option by default). With vitesse_particules, the velocity of the particles is governed by the resolution of a momentum equation for the particles.
- **methode_couplage** *str* into ['suivi', 'one_way_coupling', 'two_way_coupling']: Way of coupling between the fluid and the particles. By default, (keyword suivi), there is no interaction between both. With one_way_coupling keyword, the fluid act on the particles. With two_way_coupling keyword, besides, particles act on the fluid.
- **nb_iterations** *int*: Number of sub-timesteps to solve the momentum equation for the particles (1 per default).
- **contribution_one_way** *int* into [0, 1]: Activate (1, default) or not (0) the fluid forces on the particles when one_way_coupling or two_way_coupling coupling method is used.
- **implicite** *int* into [0, 1]: Impliciting (1) or not (0) the time scheme when weight added source term is used in the momentum equation
- **convection** *bloc_convection* (5.2) for inheritance: Keyword to alter the convection scheme.

- **diffusion** *bloc_diffusion* (5.3) for inheritance: Keyword to specify the diffusion operator.
- **boundary_conditions|conditions_limites** *condlims* (4.14.1) for inheritance: Boundary conditions.
- **sources** *sources* (5.5) for inheritance: To introduce a source term into an equation (in case of several source terms into the same equation, the blocks corresponding to the various terms need to be separated by a comma)
- **ecrire_fichier_xyz_valeur** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a text file with the following format:
n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **ecrire_fichier_xyz_valeur_bin** *ecrire_fichier_xyz_valeur_param* (5.6) for inheritance: This keyword is used to write the values of a field only for some boundaries in a binary file with the following format: n_valeur
x_1 y_1 [z_1] val_1
...
x_n y_n [z_n] val_n
The created files are named : pbname_fieldname_[boundaryname]_time.dat
- **parametre_equation** *parametre_equation_base* (5.7) for inheritance: Keyword used to specify additional parameters for the equation
- **equation_non_resolue** *str* for inheritance: The equation will not be solved while condition(t) is verified if equation_non_resolue keyword is used. Exemple: The Navier-Stokes equations are not solved between time t0 and t1.
Navier_Sokes_Standard
{ equation_non_resolue (t>t0)*(t<t1) }

5.50 injection_marqueur

Description: not_set

See also: objet_lecture (36)

Usage:

```
{
    ensemble_points bloc_lecture
    proprietes_particules bloc_lecture
    [ t_debut_injection float]
    [ dt_injection float]
```

```
}
```

where

- **ensemble_points** *bloc_lecture* (3.9)
- **proprietes_particules** *bloc_lecture* (3.9)
- **t_debut_injection** *float*
- **dt_injection** *float*

6 algo_base

Description: Basic class for multi-grid algorithms.

See also: [objet_u \(37\)](#) [algo_couple_1 \(6.1\)](#)

Usage:

6.1 algo_couple_1

Description: not_set

See also: [algo_base \(6\)](#)

Usage:

algo_couple_1 obj Lire obj {

 [**dt_uniforme**]

}

where

- **dt_uniforme**

7 /*

7.1 /*

Description: bloc of Comment in a data file.

See also: [objet_u \(37\)](#)

Usage:

/* comm

where

- **comm** *str*: Text to be commented.

8 champ_generique_base

Description: not_set

See also: [objet_u \(37\)](#) [champ_post_de_champs_post \(8.1\)](#) [champ_post_refchamp \(8.17\)](#) [predefini \(8.15\)](#)

Usage:

8.1 champ_post_de_champs_post

Description: not_set

See also: [champ_generique_base \(8\)](#) [champ_post_operateur_eqn \(8.5\)](#) [champ_post_transformation \(8.19\)](#) [champ_post_operateur_base \(8.4\)](#) [champ_post_statistiques_base \(8.6\)](#) [champ_post_extraction \(8.10\)](#) [champ_post_morceau_equation \(8.13\)](#) [champ_post_tparoi_vef \(8.18\)](#) [champ_post_reduction_0d \(8.16\)](#) [champ_post_interpolation \(8.12\)](#)

Usage:

champ_post_de_champs_post obj Lire obj {

```

[ source champ_generique_base]
[ nom_source str]
[ source_reference str]
[ sources_reference list_nom_virgule]
[ sources listchamp_generique]
}
where

```

- **source** *champ_generique_base* (8): the source field.
- **nom_source** *str*: To name a source field with the `nom_source` keyword
- **source_reference** *str*
- **sources_reference** *list_nom_virgule* (8.2)
- **sources** *listchamp_generique* (8.3): sources { Champ_Post.... { ... } Champ_Post.. { ... } }

8.2 list_nom_virgule

Description: List of name.

See also: `listobj` (35.3)

Usage:
{ object1 , object2 }
list of *nom_anonyme* (26.1) separated with ,

8.3 listchamp_generique

Description: XXX

See also: `listobj` (35.3)

Usage:
{ object1 , object2 }
list of *champ_generique_base* (8) separated with ,

8.4 champ_post_operateur_base

Description: `not_set`

See also: `champ_post_de_champs_post` (8.1) `champ_post_operateur_gradient` (8.11) `champ_post_operateur-divergence` (8.8)

Usage:
champ_post_operateur_base obj Lire obj {

```

[ source champ_generique_base]
[ nom_source str]
[ source_reference str]
[ sources_reference list_nom_virgule]
[ sources listchamp_generique]
}
where

```

- **source** *champ_generique_base* (8) for inheritance: the source field.

- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: `sources { Champ_Post.... { ... } Champ_Post.. { ... } }`

8.5 champ_post_operateur_eqn

Synonymous: **operateur_eqn**

Description: `not_set`

See also: `champ_post_de_champs_post` (8.1)

Usage:

```
champ_post_operateur_eqn obj Lire obj {
    [ numero_op int ]
    [ numero_source int ]
    [ sans_solveur_masse ]
    [ compo int ]
    [ source champ_generique_base ]
    [ nom_source str ]
    [ source_reference str ]
    [ sources_reference list_nom_virgule ]
    [ sources listchamp_generique ]
}
```

where

- **numero_op** *int*
- **numero_source** *int*
- **sans_solveur_masse**
- **compo** *int*: If you want to post-process only one component of a vector field, you can specify the number of the component after `compo` keyword. By default, it is set to -1 which means that all the components will be post-processed. This feature is not available in VDF discretization.
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: `sources { Champ_Post.... { ... } Champ_Post.. { ... } }`

8.6 champ_post_statistiques_base

Description: `not_set`

See also: `champ_post_de_champs_post` (8.1) `correlation` (8.7) `moyenne` (8.14) `ecart_type` (8.9)

Usage:

```
champ_post_statistiques_base obj Lire obj {
    t_deb float
    t_fin float
```

```

[ source champ_generique_base]
[ nom_source str]
[ source_reference str]
[ sources_reference list_nom_virgule]
[ sources listchamp_generique]
}
where

```

- **t_deb** *float*: Start of integration time
- **t_fin** *float*: End of integration time
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: `sources { Champ_Post.... { ... } Champ_Post.. { ... } }`

8.7 correlation

Synonymous: **champ_post_statistiques_correlation**

Description: to calculate the correlation between the two fields.

See also: `champ_post_statistiques_base` (8.6)

Usage:

```

correlation obj Lire obj {
    t_deb float
    t_fin float
    [ source champ_generique_base]
    [ nom_source str]
    [ source_reference str]
    [ sources_reference list_nom_virgule]
    [ sources listchamp_generique]
}
where

```

- **t_deb** *float* for inheritance: Start of integration time
- **t_fin** *float* for inheritance: End of integration time
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: `sources { Champ_Post.... { ... } Champ_Post.. { ... } }`

8.8 champ_post_operateur_divergence

Synonymous: **divergence**

Description: To calculate divergency of a given field.

See also: `champ_post_operateur_base` (8.4)

Usage:

champ_post_operateur_divergence obj Lire obj {

```
[ source champ_generique_base]  
[ nom_source str]  
[ source_reference str]  
[ sources_reference list_nom_virgule]  
[ sources listchamp_generique]
```

}

where

- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post..
{ ... }}

8.9 ecart_type

Synonymous: **champ_post_statistiques_ecart_type**

Description: to calculate the standard deviation (statistic rms) of the field `nom_champ`.

See also: `champ_post_statistiques_base` (8.6)

Usage:

ecart_type obj Lire obj {

```
t_deb float  
t_fin float  
[ source champ_generique_base]  
[ nom_source str]  
[ source_reference str]  
[ sources_reference list_nom_virgule]  
[ sources listchamp_generique]
```

}

where

- **t_deb** *float* for inheritance: Start of integration time
- **t_fin** *float* for inheritance: End of integration time
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post..
{ ... }}

8.10 champ_post_extraction

Synonymous: **extraction**

Description: To create a surface field (values at the boundary) of a volume field

See also: `champ_post_de_champs_post` (8.1)

Usage:

```
champ_post_extraction obj Lire obj {  
    domaine str  
    nom_frontiere str  
    [ methode str into ['trace', 'champ_frontiere']]  
    [ source champ_generique_base]  
    [ nom_source str]  
    [ source_reference str]  
    [ sources_reference list_nom_virgule]  
    [ sources listchamp_generique]  
}  
where
```

- **domaine** *str*: name of the volume field
- **nom_frontiere** *str*: boundary name where the values of the volume field will be picked
- **methode** *str* into ['trace', 'champ_frontiere']: name of the extraction method (trace by_default or champ_frontiere)
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post..
{ ... }}

8.11 champ_post_operateur_gradient

Synonymous: **gradient**

Description: To calculate gradient of a given field.

See also: `champ_post_operateur_base` (8.4)

Usage:

```
champ_post_operateur_gradient obj Lire obj {  
    [ source champ_generique_base]  
    [ nom_source str]  
    [ source_reference str]  
    [ sources_reference list_nom_virgule]  
    [ sources listchamp_generique]  
}  
where
```

- **source** *champ_generique_base* (8) for inheritance: the source field.

- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... } }

8.12 champ_post_interpolation

Synonymous: **interpolation**

Description: To create a field which is an interpolation of the field given by the keyword source.

See also: champ_post_de_champs_post (8.1)

Usage:

```
champ_post_interpolation obj Lire obj {
    localisation str
    [methode str]
    [domaine str]
    [optimisation_sous_maillage str into ['default', 'yes', 'no']]
    [source champ_generique_base]
    [nom_source str]
    [source_reference str]
    [sources_reference list_nom_virgule]
    [sources listchamp_generique]
}
```

where

- **localisation** *str*: type_loc indicate where is done the interpolation (elem for element or som for node).
- **methode** *str*: The optional keyword methode is limited to calculer_champ_post for the moment.
- **domaine** *str*: the domain name where the interpolation is done (by default, the calculation domain)
- **optimisation_sous_maillage** *str* into ['default', 'yes', 'no']
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... } }

8.13 champ_post_morceau_equation

Synonymous: **morceau_equation**

Description: To calculate a field related to a piece of equation. For the moment, the field which can be calculated is the stability time step of an operator equation. The problem name and the unknown of the equation should be given by Source refChamp { Pb_Champ problem_name unknown_field_of_equation }

See also: champ_post_de_champs_post (8.1)

Usage:

```
champ_post_morceau_equation obj Lire obj {
```

```

type str
numero int
option str into ['stabilite', 'flux_bords', 'flux_surfacique_bords']
[ compo int]
[ source champ_generique_base]
[ nom_source str]
[ source_reference str]
[ sources_reference list_nom_virgule]
[ sources listchamp_generique]
}
where

```

- **type** *str*: can only be *operateur* for equation operators.
- **numero** *int*: numero will be 0 (diffusive operator) or 1 (convective operator).
- **option** *str* into ['stabilite', 'flux_bords', 'flux_surfacique_bords']: option is stability for time steps or flux_bords for boundary fluxes or flux_surfacique_bords for boundary surfacic fluxes
- **compo** *int*: compo will specify the number component of the boundary flux (for boundary fluxes, in this case compo permits to specify the number component of the boundary flux choosen).
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... }}

8.14 moyenne

Synonymous: **champ_post_statistiques_moyenne**

Description: to calculate the average of the field over time

See also: **champ_post_statistiques_base** (8.6)

Usage:

```

moyenne obj Lire obj {
    [ moyenne_convergee champ_base]
    t_deb float
    t_fin float
    [ source champ_generique_base]
    [ nom_source str]
    [ source_reference str]
    [ sources_reference list_nom_virgule]
    [ sources listchamp_generique]
}
where

```

- **moyenne_convergee** *champ_base* (16.1): This option allows to read a converged time averaged field in a .xyz file in order to calculate, when resuming the calculation, the statistics fields (rms, correlation) which depend on this average. In that case, the time averaged field is not updated during the resume of calculation. In this case, the time averaged field must be fully converged to avoid errors when calculating high order statistics.
- **t_deb** *float* for inheritance: Start of integration time

- **t_fin** *float* for inheritance: End of integration time
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... } }

8.15 predefini

Description: This keyword is used to post process predefined postprocessing fields.

See also: *champ_generique_base* (8)

Usage:

predefini obj Lire obj {

pb_champ *deuxmots*

}

where

- **pb_champ** *deuxmots* (5.14): { Pb_champ nom_pb nom_champ } : nom_pb is the problem name and nom_champ is the selected field name. The available keywords for the field name are: energie_cinetique_totale, energie_cinetique_elem, viscosite_turbulente, viscous_force_x, viscous_force_y, viscous_force_z, pressure_force_x, pressure_force_y, pressure_force_z, total_force_x, total_force_y, total_force_z, viscous_force, pressure_force, total_force

8.16 champ_post_reduction_0d

Synonymous: **reduction_0d**

Description: To calculate the min, max, sum, average, weighted sum, weighted average, weighted sum by porosity, weighted average by porosity, euclidian norm, normalized euclidian norm, L1 norm, L2 norm of a field.

See also: *champ_post_de_champs_post* (8.1)

Usage:

champ_post_reduction_0d obj Lire obj {

methode *str* into ['min', 'max', 'moyenne', 'average', 'moyenne_ponderee', 'weighted_average', 'somme', 'sum', 'somme_ponderee', 'weighted_sum', 'somme_ponderee_porosite', 'weighted_sum_porosity', 'euclidian_norm', 'normalized_euclidian_norm', 'L1_norm', 'L2_norm', 'valeur_a_gauche', 'left_value']

[**source** *champ_generique_base*]

[**nom_source** *str*]

[**source_reference** *str*]

[**sources_reference** *list_nom_virgule*]

[**sources** *listchamp_generique*]

}

where

- **methode** *str* into ['min', 'max', 'moyenne', 'average', 'moyenne_ponderee', 'weighted_average', 'somme', 'sum', 'somme_ponderee', 'weighted_sum', 'somme_ponderee_porosite', 'weighted_sum_porosity', 'euclidian_norm', 'normalized_euclidian_norm', 'L1_norm', 'L2_norm', 'valeur_a_gauche', 'left_value']: name of the reduction method:
 - min for the minimum value,
 - max for the maximum value,
 - average (or moyenne) for a mean,
 - weighted_average (or moyenne_ponderee) for a mean ponderated by integration volumes, e.g: cell volumes for temperature and pressure in VDF, volumes around faces for velocity and temperature in VEF,
 - sum (or somme) for the sum of all the values of the field,
 - weighted_sum (or somme_ponderee) for a weighted sum (integral),
 - weighted_average_porosity (or moyenne_ponderee_porosite) and weighted_sum_porosity (or somme_ponderee_porosite) for the mean and sum weighted by the volumes of the elements, only for ELEM localisation,
 - euclidian_norm for the euclidian norm,
 - normalized_euclidian_norm for the euclidian norm normalized,
 - L1_norm for norm L1,
 - L2_norm for norm L2
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... } }

8.17 champ_post_refchamp

Synonymous: **refchamp**

Description: Field of prolem

See also: *champ_generique_base* (8)

Usage:

champ_post_refchamp obj Lire obj {

pb_champ *deuxmots*
[**nom_source** *str*]

}

where

- **pb_champ** *deuxmots* (5.14): { Pb_champ nom_pb nom_champ } : nom_pb is the problem name and nom_champ is the selected field name.
- **nom_source** *str*: The alias name for the field

8.18 champ_post_tparoi_vef

Synonymous: **tparoi_vef**

Description: This keyword is used to post process (only for VEF discretization) the temperature field with a slight difference on boundaries with Neumann condition where law of the wall is applied on the

temperature field. `nom_pb` is the problem name and `field_name` is the selected field name. A keyword (`temperature_physique`) is available to post process this field without using `Definition_champs`.

See also: `champ_post_de_champs_post` (8.1)

Usage:

champ_post_tparoi_vef obj Lire obj {

```
[ source champ_generique_base ]
[ nom_source str ]
[ source_reference str ]
[ sources_reference list_nom_virgule ]
[ sources listchamp_generique ]
```

}

where

- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the `nom_source` keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { `Champ_Post....` { ... } `Champ_Post..` { ... } }

8.19 champ_post_transformation

Synonymous: **transformation**

Description: To create a field with a transformation.

See also: `champ_post_de_champs_post` (8.1)

Usage:

champ_post_transformation obj Lire obj {

```
methode str into [ 'produit_scalaire', 'norme', 'vecteur', 'formule', 'composante' ]
[ expression n word1 word2 ... wordn ]
[ numero int ]
[ localisation str ]
[ source champ_generique_base ]
[ nom_source str ]
[ source_reference str ]
[ sources_reference list_nom_virgule ]
[ sources listchamp_generique ]
```

}

where

- **methode** *str* into ['produit_scalaire', 'norme', 'vecteur', 'formule', 'composante']: methode norme : will calculate the norm of a vector given by a source field
methode produit_scalaire : will calculate the dot product of two vectors given by two sources fields
methode composante numero integer : will create a field by extracting the integer component of a field given by a source field
methode formule expression 1 : will create a scalar field located to elements using expressions with x,y,z,t parameters and field names given by a source field or several sources fields.

methode vecteur expression $N \text{ f1}(x,y,z,t) \text{ fN}(x,y,z,t)$: will create a vector field located to elements by defining its N components with N expressions with x,y,z,t parameters and field names given by a source field or several sources fields.

- **expression** *n word1 word2 ... wordn*: see methodes formule and vecteur
- **numero** *int*: see methode composante
- **localisation** *str*: type_loc indicate where is done the interpolation (elem for element or som for node). The optional keyword methode is limited to calculer_champ_post for the moment
- **source** *champ_generique_base* (8) for inheritance: the source field.
- **nom_source** *str* for inheritance: To name a source field with the nom_source keyword
- **source_reference** *str* for inheritance
- **sources_reference** *list_nom_virgule* (8.2) for inheritance
- **sources** *listchamp_generique* (8.3) for inheritance: sources { Champ_Post.... { ... } Champ_Post.. { ... }}

9 chimie

Description: Keyword to describe the chmical reactions

See also: objet_u (37)

Usage:

chimie obj Lire obj {

```

    reactions reactions
    [ modele_micro_melange int]
    [ constante_modele_micro_melange float]
    [ espece_en_competition_micro_melange str]

```

}

where

- **reactions** *reactions* (9.1): list of reactions
- **modele_micro_melange** *int*: modele_micro_melange (0 by default)
- **constante_modele_micro_melange** *float*: constante of modele (1 by default)
- **espece_en_competition_micro_melange** *str*: espece in competition in reactions

9.1 reactions

Description: list of reactions

See also: listobj (35.3)

Usage:

{ object1 , object2 }

list of *reaction* (9.1.1) separeted with ,

9.1.1 reaction

Description: Keyword to describe reaction:

$w = K \text{ pow}(T, \beta) \exp(-E_a / (R T)) \prod \text{pow}(\text{Reactif}_i, \text{activity}_i)$.

If $K_{\text{inv}} > 0$,

$w = K \text{ pow}(T, \beta) \exp(-E_a / (R T)) (\prod \text{pow}(\text{Reactif}_i, \text{activity}_i) - K_{\text{inv}} / \exp(-c_r E_a / (R T)) \prod \text{pow}(\text{Produit}_i, \text{activity}_i))$

See also: `objet_lecture` ([36](#))

Usage:

```
{  
  
    reactifs str  
    produits str  
    [ constante_taux_reaction float]  
    [ coefficients_activites bloc_lecture]  
    enthalpie_reaction float  
    energie_activation float  
    exposant_beta float  
    [ contre_reaction float]  
    [ contre_energie_activation float]  
}
```

where

- **reactifs** *str*: LHS of equation (ex CH4+2*O2)
- **produits** *str*: RHS of equation (ex CO2+2*H2O)
- **constante_taux_reaction** *float*: constante of cinetic K
- **coefficients_activites** *bloc_lecture* ([3.9](#)): coefficients of activity (exemple { CH4 1 O2 2 })
- **enthalpie_reaction** *float*: DH
- **energie_activation** *float*: Ea
- **exposant_beta** *float*: Beta
- **contre_reaction** *float*: K_inv
- **contre_energie_activation** *float*: c_r_Ea

10 class_generic

Description: `not_set`

See also: `objet_u` ([37](#)) `dt_start` ([10.10](#)) `solveur_sys_base` ([10.17](#)) `Modele_Fonc_Realisable_base` ([10.2](#))

Usage:

10.1 Modele_Fonc_Realisable

Description: Deriv for instantiation of functions necessary to Realizable K-Epsilon Turbulence Model

See also: `Modele_Fonc_Realisable_base` ([10.2](#))

Usage:

10.2 Modele_Fonc_Realisable_base

Description: Base class for Functions necessary to Realizable K-Epsilon Turbulence Model

See also: `class_generic` ([10](#)) `Modele_Fonc_Realisable` ([10.1](#)) `Modele_Shih_Zhu_Lumley_VDF` ([10.3](#)) `Shih-Zhu_Lumley` ([10.4](#))

Usage:

10.3 Modele_Shih_Zhu_Lumley_VDF

Description: Functions necessary to Realizable K-Epsilon Turbulence Model in VDF

See also: Modele_Fonc_Realisable_base ([10.2](#))

Usage:

Modele_Shih_Zhu_Lumley_VDF obj Lire obj {

[**a0** *float*]

}

where

- **a0** *float*: value of parameter A0 in U* formula

10.4 Shih_Zhu_Lumley

Description: Functions necessary to Realizable K-Epsilon Turbulence Model in VEF

See also: Modele_Fonc_Realisable_base ([10.2](#))

Usage:

Shih_Zhu_Lumley obj Lire obj {

[**a0** *float*]

}

where

- **a0** *float*: value of parameter A0 in U* formula

10.5 amgx

Description: Solver via AmgX API

See also: petsc ([10.15](#))

Usage:

amgx solveur option_solveur

where

- **solveur** *str*
- **option_solveur** *bloc_lecture* ([3.9](#))

10.6 cholesky

Description: Cholesky direct method.

See also: solveur_sys_base ([10.17](#))

Usage:

cholesky obj Lire obj {

[**impr**]

```
[ quiet ]  
}  
where
```

- **impr** : Keyword which may be used to print the resolution time.
- **quiet** : To disable printing of information

10.7 dt_calc

Description: The time step at first iteration is calculated in agreement with CFL condition.

See also: `dt_start` ([10.10](#))

Usage:
dt_calc

10.8 dt_fixe

Description: The first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).

See also: `dt_start` ([10.10](#))

Usage:
dt_fixe value
where

- **value** *float*: first time step.

10.9 dt_min

Description: The first iteration is based on `dt_min`.

See also: `dt_start` ([10.10](#))

Usage:
dt_min

10.10 dt_start

Description: `not_set`

See also: `class_generic` ([10](#)) `dt_calc` ([10.7](#)) `dt_min` ([10.9](#)) `dt_fixe` ([10.8](#))

Usage:
dt_start

10.11 gcp_ns

Description: not_set

See also: gcp ([10.16](#))

Usage:

```
gcp_ns obj Lire obj {  
    solveur0 solveur_sys_base  
    solveur1 solveur_sys_base  
    [ precondition precondition_base]  
    [ precondition_nul ]  
    seuil float  
    [ impr ]  
    [ quiet ]  
    [ save_matrix|save_matrice ]  
    [ optimized ]  
    [ nb_it_max int]  
}
```

where

- **solveur0** *solveur_sys_base* ([10.17](#)): Solver type.
- **solveur1** *solveur_sys_base* ([10.17](#)): Solver type.
- **precond** *precond_base* ([28](#)) for inheritance: Keyword to define system preconditioning in order to accelerate resolution by the conjugated gradient. Many parallel preconditioning methods are not equivalent to their sequential counterpart, and you should therefore expect differences, especially when you select a high value of the final residue (*seuil*). The result depends on the number of processors and on the mesh splitting. It is sometimes useful to run the solver with no preconditioning at all. In particular:
 - when the solver does not converge during initial projection,
 - when comparing sequential and parallel computations.With no preconditioning, except in some particular cases (no open boundary), the sequential and the parallel computations should provide exactly the same results within fpu accuracy. If not, there might be a coding error or the system of equations is singular.
- **precond_nul** for inheritance: Keyword to not use a preconditioning method.
- **seuil** *float* for inheritance: Value of the final residue. The gradient ceases iteration when the Euclidean residue standard $\|Ax-B\|$ is less than this value.
- **impr** for inheritance: Keyword which is used to request display of the Euclidean residue standard each time this iterates through the conjugated gradient (display to the standard outlet).
- **quiet** for inheritance: To not displaying any outputs of the solver.
- **save_matrix|save_matrice** for inheritance: to save the matrix in a file.
- **optimized** for inheritance: This keyword triggers a memory and network optimized algorithms useful for strong scaling (when computing less than 100 000 elements per processor). The matrix and the vectors are duplicated, common items removed and only virtual items really used in the matrix are exchanged.

Warning: this is experimental and known to fail in some VEF computations (L2 projection step will not converge). Works well in VDF.
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gcp.

10.12 gen

Description: not_set

See also: solveur_sys_base ([10.17](#))

Usage:

```
gen obj Lire obj {  
    solv_elem str  
    precond precond_base  
    [ seuil float ]  
    [ impr ]  
    [ save_matrix|save_matrice ]  
    [ quiet ]  
    [ nb_it_max int ]  
    [ force ]  
}
```

where

- **solv_elem** *str*: To specify a solver among gmres or bicgstab.
- **precond** *precond_base* ([28](#)): The only preconditionner that we can specify is ilu.
- **seuil** *float*: Value of the final residue. The solver ceases iterations when the Euclidean residue standard $\|Ax-B\|$ is less than this value. default value $1e-12$.
- **impr** : Keyword which is used to request display of the Euclidean residue standard each time this iterates through the conjugated gradient (display to the standard outlet).
- **save_matrix**|**save_matrice** : To save the matrix in a file.
- **quiet** : To not displaying any outputs of the solver.
- **nb_it_max** *int*: Keyword to set the maximum iterations number for the GEN solver.
- **force** : Keyword to set ipar[5]=-1 in the GEN solver. This is helpful if you notice that the solver does not perform more than 100 iterations. If this keyword is specified in the datafile, you should provide nb_it_max.

10.13 gmres

Description: Gmres method (for non symmetric matrix).

See also: solveur_sys_base ([10.17](#))

Usage:

```
gmres obj Lire obj {  
    [ impr ]  
    [ quiet ]  
    [ seuil float ]  
    [ diag ]  
    [ nb_it_max int ]  
    [ controle_residu int into [0, 1]]  
    [ save_matrix|save_matrice ]  
    [ dim_espace_krilov int ]  
}
```

where

- **impr** : Keyword which may be used to print the convergence.
- **quiet** : To disable printing of information
- **seuil** *float*: Convergence value.
- **diag** : Keyword to use diagonal preconditionner (in place of pilut that is not parallel).

- **nb_it_max** *int*: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** *int into [0, 1]*: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.
- **save_matrix|save_matrice** : to save the matrix in a file.
- **dim_espace_krilov** *int*

10.14 optimal

Description: Optimal is a solver which tests several solvers of the previous list to choose the fastest one for the considered linear system.

See also: solveur_sys_base ([10.17](#))

Usage:

```
optimal obj Lire obj {
    seuil float
    [ impr ]
    [ quiet ]
    [ save_matrix|save_matrice ]
    [ frequence_recalc int]
    [ nom_fichier_solveur str]
    [ fichier_solveur_non_recree ]
}
```

where

- **seuil** *float*: Convergence threshold
- **impr** : To print the convergency of the fastest solver
- **quiet** : To disable printing of information
- **save_matrix|save_matrice** : To save the linear system (A, x, B) into a file
- **frequence_recalc** *int*: To set a time step period (by default, 100) for re-checking the fastest solver
- **nom_fichier_solveur** *str*: To specify the file containing the list of the tested solvers
- **fichier_solveur_non_recree** : To avoid the creation of the file containing the list

10.15 petsc

Description: Solver via Petsc API

Usage:

```
Solveur_pression Petsc Solver { precond Precond
    [ seuil seuil | nb_it_max integer ]
    [ impr | quiet ]
    [ save_matrix | read_matrix]
}
```

Solver : Several solvers through PETSc API are available :

GCP : Conjugate Gradient

PIPECG : Pipelined Conjugate Gradient (possible reduced CPU cost during massive parallel calculation due to a single non-blocking reduction per iteration, if TRUST is built with a MPI-3 implementation).

GMRES : Generalized Minimal Residual

BICGSTAB : Stabilized Bi-Conjugate Gradient


IBICGSTAB : Improved version of previous one for massive parallel computations (only a single global reduction operation instead of the usual 3 or 4).

CHOLESKY : Parallelized version of Cholesky from MUMPS library. This solver accepts since the 1.6.7 version an option to select a different ordering than the automatic selected one by MUMPS (and printed by using the **impr** option). The possible choices are **Metis** | **Scotch** | **PT-Scotch** | **Parmetis**. The two last options can only be used during a parallel calculation, whereas the two first are available for sequential or parallel calculations. It seems that the CPU cost of $A=LU$ factorization but also of the backward/forward elimination steps may sometimes be reduced by selecting a different ordering (Scotch seems often the best for b/f elimination) than the default one. Notice that this solver requires a huge amount of memory compared to iterative methods. To know how many RAM you will need by core, then use the **impr** option to have detailed informations during the analysis phase and before the factorisation phase (in the following output, you will learn that the largest memory is taken by the 0th CPU with 108MB):

```
...
** Rank of proc needing largest memory in IC facto      :      0
** Estimated corresponding MBYTES for IC facto         :    108
...
```

Thanks to the following graph, you read that in order to solve for instance a flow on a mesh with 2.6e6 cells, you will need to run a parallel calculation on 32 CPUs if you have cluster nodes with only 4GB/core (6.2GB*0.42=2.6GB) :

Relative evolution compare to a 16 CPUs parallel calculation
on a 2.6e6 cells mesh (163000 cells/CPU) where:
Peak RAM/CPU is 6.2GB
 $A=LU$ in factorization in 206 s
 $x=A^{-1}.B$ solve in 0.83 s

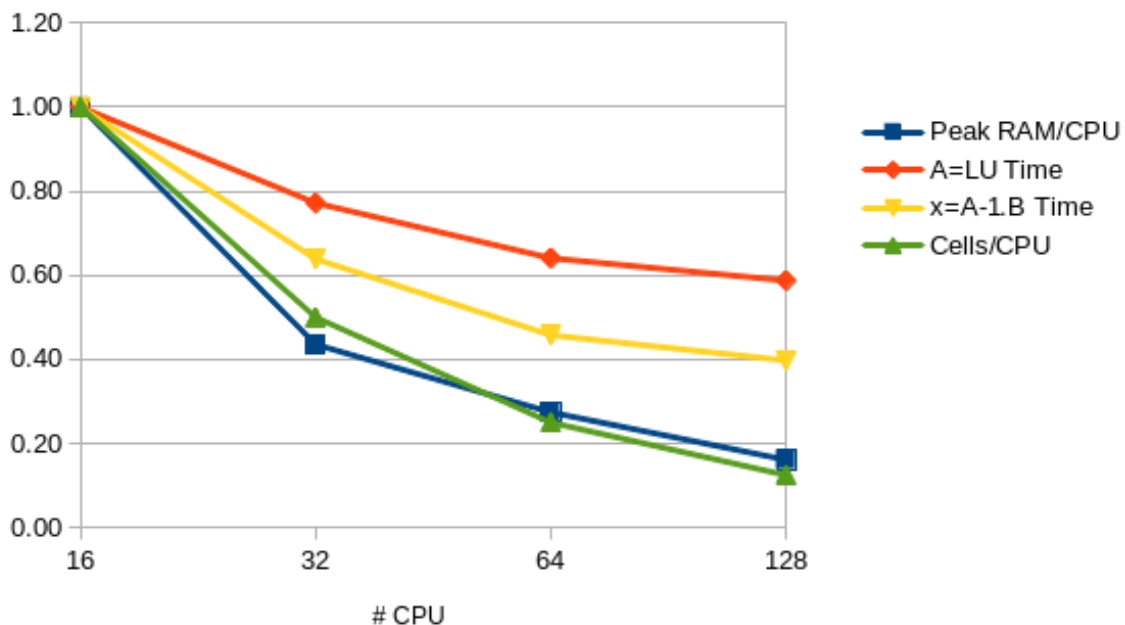

CHOLESKY_OUT_OF_CORE : Same as the previous one but with a written LU decomposition of disk (save RAM memory but add an extra CPU cost during $Ax=B$ solve)

CHOLESKY_SUPERLU : Parallelized Cholesky from SUPERLU_DIST library (less CPU and RAM efficient than the previous one)

CHOLESKY_PASTIX : Parallelized Cholesky from PASTIX library

CHOLESKY_UMFPACK : Sequential Cholesky from UMFPACK library (seems fast).

CLI { string } : Command Line Interface. Should be used only by advanced users, to access the whole solver/preconditioners from the PETSC API. To find all the available options, run your calculation with the -ksp_view -help options:

trust datafile [N] -ksp_view -help

...

Preconditioner (PC) Options -----

-pc_type Preconditioner:(one of) none jacobi pbjacobi bjacobi sor lu shell mg
eisenstat ilu icc cholesky asm ksp composite redundant nn mat fieldsplit galerkin openmp spai hypre
tfs (PCSetType)

HYPRE preconditioner options

-pc_hyre_type <pilut> (choose one of) pilut parasails boomeramg

HYPRE ParaSails Options

-pc_hyre_parasails_nlevels <1>: Number of number of levels (None)

-pc_hyre_parasails_thresh <0.1>: Threshold (None)

-pc_hyre_parasails_filter <0.1>: filter (None)

-pc_hyre_parasails_loadbal <0>: Load balance (None)

-pc_hyre_parasails_logging: <FALSE> Print info to screen (None)

-pc_hyre_parasails_reuse: <FALSE> Reuse nonzero pattern in preconditioner (None)

-pc_hyre_parasails_sym <nonsymmetric> (choose one of) nonsymmetric SPD nonsymmetric,SPD

Krylov Method (KSP) Options -----

-ksp_type Krylov method:(one of) cg cgne stcg gltr richardson chebychev gmres tcqmr

bcgs bcgsl cgs tfqmr cr lsqr preonly qcg bicg fgmres minres symmlq lgmres lcd (KSPSetType)

-ksp_max_it <10000>: Maximum number of iterations (KSPSetTolerances)

-ksp_rtol <0>: Relative decrease in residual norm (KSPSetTolerances)

-ksp_atol <1e-12>: Absolute value of residual norm (KSPSetTolerances)

-ksp_divtol <10000>: Residual norm increase cause divergence (KSPSetTolerances)

-ksp_converged_use_initial_residual_norm: Use initial residual residual norm for computing relative convergence

-ksp_monitor_singular_value <stdout>: Monitor singular values (KSPMonitorSet)

-ksp_monitor_short <stdout>: Monitor preconditioned residual norm with fewer digits (KSPMonitorSet)

-ksp_monitor_draw: Monitor graphically preconditioned residual norm (KSPMonitorSet)

-ksp_monitor_draw_true_residual: Monitor graphically true residual norm (KSPMonitorSet)

Example to use the multigrid method as a solver, not only as a preconditioner:

Solveur_pression Petsc CLI { -ksp_type richardson -pc_type hypre -pc_hyre_type boomeramg -ksp_atol 1.e-7 }

Precond : Several preconditioners are available :

NULL { } : No preconditioner used

BLOCK_JACOBI_ICC { **level** k **ordering** **natural** | **rcm** } : Incomplete Cholesky factorization for symmetric matrix with the PETSc implementation. The integer k is the factorization level (default value, 1). In parallel, the factorization is done by block (one per processor by default). The ordering of the local matrix is **natural** by default, but **rcm** ordering, which reduces the bandwidth of the local matrix, may interestingly improve the quality of the decomposition and reduces the number of iterations.

SSOR { **omega** double } : Symmetric Successive Over Relaxation algorithm. **omega** (default value, 1.5) defines the relaxation factor.

EISENTAT { **omega** double } : SSOR version with Eisenstat trick which reduces the number of computations and thus CPU cost

SPAI { **level** **nlevels** **epsilon** **thresh** } : Spai Approximate Inverse algorithm from Parasails Hypre library. Two parameters are available, **nlevels** and **thresh**.

PILUT { **level** **k** **epsilon** **thresh** } : Dual Threshold Incomplete LU factorization. The integer **k** is the factorization level and **epsilon** is the drop tolerance.

DIAG { } : Diagonal (Jacobi) preconditioner.

BOOMERAMG { } : Multigrid preconditioner (no option is available yet, look at CLI command and Petsc documentation to try other options).

seuil corresponds to the iterative solver convergence value. The iterative solver converges when the Euclidean residue standard $\|Ax-B\|$ is less than the value *seuil*.

nb_it_max integer : In order to specify a given number of iterations instead of a condition on the residue with the keyword **seuil**. May be useful when defining a PETSc solver for the implicit time scheme where convergence is very fast: 5 or less iterations seems enough.

impr is the keyword which is used to request display of the Euclidean residue standard each time this iterates through the conjugated gradient (display to the standard outlet).

quiet is a keyword which is used to not displaying any outputs of the solver.

save_matrix/read_matrix are the keywords to savelread into a file the constant matrix **A** of the linear system $Ax=B$ solved (eg: matrix from the pressure linear system for an incompressible flow). It is useful when you want to minimize the MPI communications on massive parallel calculation. Indeed, in VEF discretization, the overlapping width (generaly 2, specified with the **largeur_joint** option in the partition keyword **partition**) can be reduced to 1, once the matrix has been properly assembled and saved. The cost of the MPI communications in TRUST itself (not in PETSc) will be reduced with length messages divided by 2. So the strategy is:

I) Partition your VEF mesh with a **largeur_joint** value of 2

II) Run your parallel calculation on 0 time step, to build and save the matrix with the **save_matrix** option. A file named *Matrix_NBROWS_rows_NCPUS_cpus.petsc* will be saved to the disk (where NBROWS is the number of rows of the matrix and NCPUS the number of CPUs used).

III) Partition your VEF mesh with a **largeur_joint** value of 1

IV) Run your parallel calculation completely now and substitute the **save_matrix** option by the **read_matrix** option. Some interesting gains have been noticed when the cost of linear system solve with PETSc is small compared to all the other operations.

TIPS:

A) Solver for symmetric linear systems (e.g: Pressure system from Navier-Stokes equations):

-The **CHOLESKY** parallel solver is from MUMPS library. It offers better performance than all others solvers if you have enough RAM for your calculation. A parallel calculation on a cluster with 4GBytes on each processor, 40000 cells/processor seems the upper limit. Seems to be very slow to initialize above 500 cpus/cores.

-When running a parallel calculation with a high number of cpus/cores (typically more than 500) where preconditioner scalability is the key for CPU performance, consider **BICGSTAB** with **BLOCK_JACOBI_ICC(1)** as preconditioner or if not converges, **GCP** with **BLOCK_JACOBI_ICC(1)** as preconditioner.

-For other situations, the first choice should be **GCP/SSOR**. In order to fine tune the solver choice, each one of the previous list should be considered. Indeed, the CPU speed of a solver depends of a lot of parameters. You may give a try to the **OPTIMAL** solver to help you to find the fastest solver on your study.

B) Solver for non symmetric linear systems (e.g.: Implicit schemes):

The **BICGSTAB/DIAG** solver seems to offer the best performances.

Additional information is available into the PETSC documentation available on:

\$TRUST_ROOT/lib/src/LIBPETSC/petsc/*/docs/manual.pdf

See also: solveur_sys_base (10.17) amgx (10.5)

Usage:

petsc solveur option_solveur

where

- **solveur** *str*
- **option_solveur** *bloc_lecture* (3.9)

10.16 gcp

Description: Preconditioned conjugated gradient.

See also: solveur_sys_base (10.17) gcp_ns (10.11)

Usage:

gcp obj Lire obj {

 [**precond** *precond_base*]

 [**precond_nul**]

seuil *float*

 [**impr**]

 [**quiet**]

 [**save_matrix|save_matrice**]

 [**optimized**]

 [**nb_it_max** *int*]

}

where

- **precond** *precond_base* (28): Keyword to define system preconditioning in order to accelerate resolution by the conjugated gradient. Many parallel preconditioning methods are not equivalent to their sequential counterpart, and you should therefore expect differences, especially when you select a high value of the final residue (**seuil**). The result depends on the number of processors and on the mesh splitting. It is sometimes useful to run the solver with no preconditioning at all. In particular:
 - when the solver does not converge during initial projection,
 - when comparing sequential and parallel computations.With no preconditioning, except in some particular cases (no open boundary), the sequential and the parallel computations should provide exactly the same results within fpu accuracy. If not, there might be a coding error or the system of equations is singular.
- **precond_nul** : Keyword to not use a preconditioning method.
- **seuil** *float*: Value of the final residue. The gradient ceases iteration when the Euclidean residue standard $\|Ax-B\|$ is less than this value.
- **impr** : Keyword which is used to request display of the Euclidean residue standard each time this iterates through the conjugated gradient (display to the standard outlet).
- **quiet** : To not displaying any outputs of the solver.
- **save_matrix|save_matrice** : to save the matrix in a file.
- **optimized** : This keyword triggers a memory and network optimized algorithms useful for strong scaling (when computing less than 100 000 elements per processor). The matrix and the vectors are duplicated, common items removed and only virtual items really used in the matrix are exchanged. Warning: this is experimental and known to fail in some VEF computations (L2 projection step will not converge). Works well in VDF.

- **nb_it_max** *int*: Keyword to set the maximum iterations number for the Gcp.

10.17 solveur_sys_base

Description: Basic class to solve the linear system.

See also: `class_generic` (10) `optimal` (10.14) `gen` (10.12) `petsc` (10.15) `gcp` (10.16) `cholesky` (10.6) `gmres` (10.13)

Usage:

11

11.1

Description: Comments in a data file.

See also: `objet_u` (37)

Usage:

comm

where

- **comm** *str*: Text to be commented.

12 condlim_base

Description: Basic class of boundary conditions.

See also: `objet_u` (37) `paroi_fixe` (12.54) `symetrie` (12.71) `periodique` (12.67) `paroi_adiabatique` (12.36) `dirichlet` (12.6) `neumann` (12.35) `paroi_contact` (12.37) `paroi_contact_fictif` (12.38) `paroi_echange_contact_vdf` (12.45) `paroi_echange_externer_impose` (12.49) `paroi_echange_global_impose` (12.53) `Paroi` (12.3) `paroi_flux_impose` (12.56) `frontiere_ouverte_fraction_massique_imposee` (12.16) `paroi_echange_contact_correlation_vdf` (12.41) `paroi_echange_contact_correlation_vdf` (12.42) `Neumann_homogene` (12.1) `frontiere_ouverte_k_eps_impose` (12.21) `paroi_decalee_robin` (12.39) `paroi_ft_disc` (12.60) `sortie_libre_rho_variable` (12.69) `flux_radiatif` (12.11) `contact_vdf_vdf` (12.4) `contact_vdf_vdf` (12.5) `echange_contact_vdf_ft_disc_solid` (12.9) `echange_contact_vdf_ft_disc` (12.8)

Usage:

condlim_base

12.1 Neumann_homogene

Description: Homogeneous neumann boundary condition

See also: `condlim_base` (12) `Neumann_pari_adiabatique` (12.2)

Usage:

Neumann_homogene

12.2 Neumann_paro_adiabatique

Description: Adiabatic wall neumann boundary condition

See also: Neumann_homogene ([12.1](#))

Usage:

Neumann_paro_adiabatique

12.3 Paroi

Description: Impermeability condition at a wall called bord (edge) (standard flux zero). This condition must be associated with a wall type hydraulic condition.

See also: condlim_base ([12](#))

Usage:

Paroi

12.4 contact_vdf_vef

Description: Boundary condition in the case of two problems (VDF -> VEF).

See also: condlim_base ([12](#))

Usage:

contact_vdf_vef champ

where

- **champ** *champ_front_base* ([17.1](#)): Boundary field type.

12.5 contact_vef_vdf

Description: Boundary condition in the case of two problems (VEF -> VDF).

See also: condlim_base ([12](#))

Usage:

contact_vef_vdf champ

where

- **champ** *champ_front_base* ([17.1](#)): Boundary field type.

12.6 dirichlet

Description: Dirichlet condition at the boundary called bord (edge) : 1). For Navier-Stokes equations, velocity imposed at the boundary; 2). For scalar transport equation, scalar imposed at the boundary.

See also: condlim_base ([12](#)) paroi_defilante ([12.40](#)) paroi_knudsen_non_negligeable ([12.62](#)) frontiere_ouverte_vitesse_imposee ([12.33](#)) frontiere_ouverte_temperature_imposee ([12.30](#)) frontiere_ouverte_concentration_imposee ([12.15](#)) paroi_temperature_imposee ([12.64](#)) scalaire_impose_paro ([12.68](#)) paroi_rugueuse ([12.63](#))

Usage:

dirichlet

12.7 echange_contact_rayo_transp_vdf

Description: Exchange boundary condition in VDF between the transparent fluid and the solid for a problem coupled with radiation. Without radiation, it is the equivalent of the Paroi_Echange_contact_VDF exchange condition.

See also: `paroi_echange_contact_vdf` ([12.45](#))

Usage:

echange_contact_rayo_transp_vdf *autrepb nameb temp h*

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **temp** *str*: Name of field.
- **h** *float*: Value assigned to a coefficient (expressed in W.K-1m-2) that characterises the contact between the two mediums. In order to model perfect contact, h must be taken to be infinite. This value must obviously be the same in both the two problems blocks.
The surface thermal flux exchanged between the two mediums is represented by :
$$fi = h (T1-T2)$$
 where $1/h = d1/\lambda1 + 1/val_h_contact + d2/\lambda2$
where di : distance between the node where Ti and the wall is found.

12.8 echange_contact_vdf_ft_disc

Description: `echange_conatct_vdf` en precisant la phase

See also: `condlim_base` ([12](#))

Usage:

echange_contact_vdf_ft_disc *obj Lire obj {*

autre_probleme str
autre_bord str
autre_champ_temperature str
nom_mon_indicatrice str
phase int

}

where

- **autre_probleme** *str*: name of other problem
- **autre_bord** *str*: name of other boundary
- **autre_champ_temperature** *str*: name of other field
- **nom_mon_indicatrice** *str*: name of indicatrice
- **phase** *int*: phase

12.9 echange_contact_vdf_ft_disc_solid

Description: `echange_conatct_vdf` en precisant la phase

See also: `condlim_base` ([12](#))

Usage:

echange_contact_vdf_ft_disc_solid *obj Lire obj {*

```

    autre_probleme str
    autre_bord str
    autre_champ_temperature_indic1 str
    autre_champ_temperature_indic0 str
    autre_champ_indicatrice str
}
where

```

- **autre_probleme** *str*: name of other problem
- **autre_bord** *str*: name of other boundary
- **autre_champ_temperature_indic1** *str*: name of temperature indic 1
- **autre_champ_temperature_indic0** *str*: name of temperature indic 0
- **autre_champ_indicatrice** *str*: name of indicatrice

12.10 entree_temperature_imposee_h

Description: Particular case of class `frontiere_ouverte_temperature_imposee` for enthalpy equation.

See also: `frontiere_ouverte_temperature_imposee` ([12.30](#))

Usage:

```

entree_temperature_imposee_h ch
where

```

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.11 flux_radiatif

Description: Boundary condition for radiation equation.

See also: `condlim_base` ([12](#)) `flux_radiatif_vdf` ([12.12](#)) `flux_radiatif_vef` ([12.13](#))

Usage:

```

flux_radiatif na a ne emissivite
where

```

- **na** *str into ['A']*: Keyword for constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **a** *float*: Value of constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **ne** *str into ['emissivite']*: Keyword for wall emissivity.
- **emissivite** *champ_front_base* ([17.1](#)): Wall emissivity, value between 0 and 1.

12.12 flux_radiatif_vdf

Description: Boundary condition for radiation equation in VDF.

See also: `flux_radiatif` ([12.11](#))

Usage:

```

flux_radiatif_vdf na a ne emissivite
where

```

- **na** *str into ['A']*: Keyword for constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **a** *float*: Value of constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **ne** *str into ['emissivite']*: Keyword for wall emissivity.
- **emissivite** *champ_front_base (17.1)*: Wall emissivity, value between 0 and 1.

12.13 flux_radiatif_vef

Description: Boundary condition for radiation equation in VEF.

See also: flux_radiatif (12.11)

Usage:

flux_radiatif_vef na a ne emissivite

where

- **na** *str into ['A']*: Keyword for constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **a** *float*: Value of constant in boundary condition for irradiancy (sqrt(3) for half-infinite domain or 2 in closed domain).
- **ne** *str into ['emissivite']*: Keyword for wall emissivity.
- **emissivite** *champ_front_base (17.1)*: Wall emissivity, value between 0 and 1.

12.14 frontiere_ouverte

Description: Boundary outlet condition on the boundary called bord (edge) (diffusion flux zero). This condition must be associated with a boundary outlet hydraulic condition.

See also: neumann (12.35) frontiere_ouverte_rayo_transp (12.26) frontiere_ouverte_rayo_semi_transp (12.25)

Usage:

frontiere_ouverte var_name ch

where

- **var_name** *str into ['T_ext', 'C_ext', 'Y_ext', 'K_Eps_ext', 'Fluctu_Temperature_ext', 'Flux_Chaleur-Turb_ext', 'V2_ext']*: Field name.
- **ch** *champ_front_base (17.1)*: Boundary field type.

12.15 frontiere_ouverte_concentration_imposee

Description: Imposed concentration condition at an open boundary called bord (edge) (situation corresponding to a fluid inlet). This condition must be associated with an imposed inlet velocity condition.

See also: dirichlet (12.6)

Usage:

frontiere_ouverte_concentration_imposee ch

where

- **ch** *champ_front_base (17.1)*: Boundary field type.

12.16 `frontiere_ouverte_fraction_massique_imposee`

Description: `not_set`

See also: `condlim_base` ([12](#))

Usage:

`frontiere_ouverte_fraction_massique_imposee ch`

where

- **`ch`** *champ_front_base* ([17.1](#)): Boundary field type.

12.17 `frontiere_ouverte_gradient_pression_impose`

Description: Normal imposed pressure gradient condition on the open boundary called `bord` (edge). This boundary condition may be only used in VDF discretization. The imposed $\partial P/\partial n$ value is expressed in Pa.m-1.

See also: `neumann` ([12.35](#)) `frontiere_ouverte_gradient_pression_impose_vefprep1b` ([12.18](#))

Usage:

`frontiere_ouverte_gradient_pression_impose ch`

where

- **`ch`** *champ_front_base* ([17.1](#)): Boundary field type.

12.18 `frontiere_ouverte_gradient_pression_impose_vefprep1b`

Description: Keyword for an outlet boundary condition in VEF P1B/P1NC on the gradient of the pressure.

See also: `frontiere_ouverte_gradient_pression_impose` ([12.17](#))

Usage:

`frontiere_ouverte_gradient_pression_impose_vefprep1b ch`

where

- **`ch`** *champ_front_base* ([17.1](#)): Boundary field type.

12.19 `frontiere_ouverte_gradient_pression_libre_vef`

Description: Class for outlet boundary condition in VEF like Orlansky. There is no reference for pressure for these boundary conditions so it is better to add pressure condition (with `Frontiere_ouverte_pression_imposee`) on one or two cells (for symmetry in a channel) of the boundary where Orlansky conditions are imposed.

See also: `neumann` ([12.35](#))

Usage:

`frontiere_ouverte_gradient_pression_libre_vef`

12.20 `frontiere_ouverte_gradient_pression_libre_vefprep1b`

Description: Class for outlet boundary condition in VEF P1B/P1NC like Orlansky.

See also: `neumann` ([12.35](#))

Usage:

`frontiere_ouverte_gradient_pression_libre_vefprep1b`

12.21 `frontiere_ouverte_k_eps_impose`

Description: Turbulence condition imposed on an open boundary called bord (edge) (this situation corresponds to a fluid inlet). This condition must be associated with an imposed inlet velocity condition.

See also: `condlim_base` ([12](#))

Usage:

`frontiere_ouverte_k_eps_impose ch`

where

- `ch` *champ_front_base* ([17.1](#)): Boundary field type.

12.22 `frontiere_ouverte_pression_imposee`

Description: Imposed pressure condition at the open boundary called bord (edge). The imposed pressure field is expressed in Pa.

See also: `neumann` ([12.35](#))

Usage:

`frontiere_ouverte_pression_imposee ch`

where

- `ch` *champ_front_base* ([17.1](#)): Boundary field type.

12.23 `frontiere_ouverte_pression_imposee_orlansky`

Description: This boundary condition may only be used with VDF discretization. There is no reference for pressure for this boundary condition so it is better to add pressure condition (with `Frontiere_ouverte_pression_imposee`) on one or two cells (for symmetry in a channel) of the boundary where Orlansky conditions are imposed.

See also: `neumann` ([12.35](#))

Usage:

`frontiere_ouverte_pression_imposee_orlansky`

12.24 `frontiere_ouverte_pression_moyenne_imposee`

Description: Class for open boundary with pressure mean level imposed.

See also: `neumann` ([12.35](#))

Usage:

frontiere_ouverte_pression_moyenne_imposee pext

where

- **pext** *float*: Mean pressure.

12.25 frontiere_ouverte_rayo_semi_transp

Description: Keyword to set a boundary outlet temperature condition on the boundary called bord (edge) (diffusion flux zero) for a radiation problem with semi transparent gas.

See also: `frontiere_ouverte` ([12.14](#))

Usage:

frontiere_ouverte_rayo_semi_transp var_name ch

where

- **var_name** *str* into ['T_ext', 'C_ext', 'Y_ext', 'K_Eps_ext', 'Fluctu_Temperature_ext', 'Flux_Chaleur-Turb_ext', 'V2_ext']: Field name.
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.26 frontiere_ouverte_rayo_transp

Description: Keyword to set a boundary outlet temperature condition on the boundary called bord (edge) (diffusion flux zero) for a radiation problem with transparent gas.

See also: `frontiere_ouverte` ([12.14](#)) `frontiere_ouverte_rayo_transp_vdf` ([12.27](#)) `frontiere_ouverte_rayo-transp_vef` ([12.28](#))

Usage:

frontiere_ouverte_rayo_transp var_name ch

where

- **var_name** *str* into ['T_ext', 'C_ext', 'Y_ext', 'K_Eps_ext', 'Fluctu_Temperature_ext', 'Flux_Chaleur-Turb_ext', 'V2_ext']: Field name.
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.27 frontiere_ouverte_rayo_transp_vdf

Description: doit disparaitre

See also: `frontiere_ouverte_rayo_transp` ([12.26](#))

Usage:

frontiere_ouverte_rayo_transp_vdf var_name ch

where

- **var_name** *str* into ['T_ext', 'C_ext', 'Y_ext', 'K_Eps_ext', 'Fluctu_Temperature_ext', 'Flux_Chaleur-Turb_ext', 'V2_ext']: Field name.
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.28 **frontiere_ouverte_rayo_transp_vef**

Description: doit disparaitre

See also: `frontiere_ouverte_rayo_transp` ([12.26](#))

Usage:

frontiere_ouverte_rayo_transp_vef **var_name** **ch**

where

- **var_name** *str into* ['T_ext', 'C_ext', 'Y_ext', 'K_Eps_ext', 'Fluctu_Temperature_ext', 'Flux_Chaleur-Turb_ext', 'V2_ext']: Field name.
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.29 **frontiere_ouverte_rho_u_impose**

Description: This keyword is used to designate a condition of imposed mass rate at an open boundary called bord (edge). The imposed mass rate field at the inlet is vectorial and the imposed velocity values are expressed in kg.s-1. This boundary condition can be used only with the Quasi compressible model.

See also: `frontiere_ouverte_vitesse_imposee_sortie` ([12.34](#))

Usage:

frontiere_ouverte_rho_u_impose **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.30 **frontiere_ouverte_temperature_imposee**

Description: Imposed temperature condition at the open boundary called bord (edge) (in the case of fluid inlet). This condition must be associated with an imposed inlet velocity condition. The imposed temperature value is expressed in oC or K.

See also: `dirichlet` ([12.6](#)) `entree_temperature_imposee_h` ([12.10](#)) `frontiere_ouverte_temperature_imposee_rayo_transp` ([12.32](#)) `frontiere_ouverte_temperature_imposee_rayo_semi_transp` ([12.31](#))

Usage:

frontiere_ouverte_temperature_imposee **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.31 **frontiere_ouverte_temperature_imposee_rayo_semi_transp**

Description: Imposed temperature condition for a radiation problem with semi transparent gas.

See also: `frontiere_ouverte_temperature_imposee` ([12.30](#))

Usage:

frontiere_ouverte_temperature_imposee_rayo_semi_transp **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.32 `frontiere_ouverte_temperature_imposee_rayo_transp`

Description: Imposed temperature condition for a radiation problem with transparent gas.

See also: `frontiere_ouverte_temperature_imposee` ([12.30](#))

Usage:

`frontiere_ouverte_temperature_imposee_rayo_transp` **`ch`**

where

- **`ch`** `champ_front_base` ([17.1](#)): Boundary field type.

12.33 `frontiere_ouverte_vitesse_imposee`

Description: Class for velocity-inlet boundary condition. The imposed velocity field at the inlet is vectorial and the imposed velocity values are expressed in m.s-1.

See also: `dirichlet` ([12.6](#)) `frontiere_ouverte_vitesse_imposee_sortie` ([12.34](#))

Usage:

`frontiere_ouverte_vitesse_imposee` **`ch`**

where

- **`ch`** `champ_front_base` ([17.1](#)): Boundary field type.

12.34 `frontiere_ouverte_vitesse_imposee_sortie`

Description: Sub-class for velocity boundary condition. The imposed velocity field at the open boundary is vectorial and the imposed velocity values are expressed in m.s-1.

See also: `frontiere_ouverte_vitesse_imposee` ([12.33](#)) `frontiere_ouverte_rho_u_impose` ([12.29](#))

Usage:

`frontiere_ouverte_vitesse_imposee_sortie` **`ch`**

where

- **`ch`** `champ_front_base` ([17.1](#)): Boundary field type.

12.35 `neumann`

Description: Neumann condition at the boundary called bord (edge) : 1). For Navier-Stokes equations, constraint imposed at the boundary; 2). For scalar transport equation, flux imposed at the boundary.

See also: `condlim_base` ([12](#)) `frontiere_ouverte_gradient_pression_libre_vef` ([12.19](#)) `frontiere_ouverte_gradient_pression_libre_vefprep1b` ([12.20](#)) `frontiere_ouverte_gradient_pression_impose` ([12.17](#)) `frontiere_ouverte_pression_imposee` ([12.22](#)) `frontiere_ouverte_pression_imposee_orlansky` ([12.23](#)) `frontiere_ouverte_pression_moyenne_imposee` ([12.24](#)) `frontiere_ouverte` ([12.14](#)) `sortie_libre_temperature_imposee_h` ([12.70](#))

Usage:

`neumann`

12.36 paroi_adiabatique

Description: Normal zero flux condition at the wall called bord (edge).

See also: `condlim_base` ([12](#))

Usage:

paroi_adiabatique

12.37 paroi_contact

Description: Thermal condition between two domains. Important: the name of the boundaries in the two domains should be the same. (Warning: there is also an old limitation not yet fixed on the sequential algorithm in VDF to detect the matching faces on the two boundaries: faces should be ordered in the same way). The kind of condition depends on the discretization. In VDF, it is a heat exchange condition, and in VEF, a temperature condition.

Such a coupling requires coincident meshes for the moment. In case of non-coincident meshes, run is stopped and two external files are automatically generated in VEF (`connectivity_failed_boundary_name` and `connectivity_failed_pb_name.med`). In 2D, the keyword `Decouper_bord_coincident` associated to the `connectivity_failed_boundary_name` file allows to generate a new coincident mesh.

In 3D, for a first preliminary cut domain with HOMARD (fluid for instance), the second problem associated to `pb_name` (solide in a fluid/solid coupling problem) has to be submitted to HOMARD cutting procedure with `connectivity_failed_pb_name.med`.

Such a procedure works as while the primary refined mesh (fluid in our example) impacts the fluid/solid interface with a compact shape as described below (values 2 or 4 indicates the number of division from primary faces obtained in fluid domain at the interface after HOMARD cutting):

2-2-2-2-2-2

2-4-4-4-4-4-2 2-2-2

2-4-4-4-4-2 2-4-2

2-2-2-2-2 2-2

OK

2-2 2-2-2

2-4-2 2-2

2-2 2-2

NOT OK

See also: `condlim_base` ([12](#))

Usage:

paroi_contact autrepb nameb

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: boundary name of the remote problem which should be the same than the local name

12.38 paroi_contact_fictif

Description: This keyword is derivated from `paroi_contact` and is especially dedicated to compute coupled fluid/solid/fluid problem in case of thin material. Thanks to this option, solid is considered as a fictitious media (no mesh, no domain associated), and coupling is performed by considering instantaneous thermal equilibrium in it (for the moment).

See also: `condlim_base` ([12](#))

Usage:

paroi_contact_fictif **autrepb** **nameb** **conduct_fictif** **ep_fictive**

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **conduct_fictif** *float*: thermal conductivity
- **ep_fictive** *float*: thickness of the fictitious media

12.39 paroi_decalee_robin

Description: This keyword is used to designate a Robin boundary condition ($a.u+b.du/dn=c$) associated with the Pironneau methodology for the wall laws. The value of given by the delta option is the distance between the mesh (where symmetry boundary condition is applied) and the fictitious wall. This boundary condition needs the definition of the dedicated source terms (Source_Robin or Source_Robin_Scalaire) according the equations used.

See also: `condlim_base` ([12](#))

Usage:

paroi_decalee_robin obj Lire obj {

delta *float*

}

where

- **delta** *float*

12.40 paroi_defilante

Description: Keyword to designate a condition where tangential velocity is imposed on the wall called bord (edge). If the velocity components set by the user is not tangential, projection is used.

See also: `dirichlet` ([12.6](#))

Usage:

paroi_defilante **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.41 paroi_echange_contact_correlation_vdf

Description: Class to define a thermohydraulic 1D model which will apply to a boundary of 2D or 3D domain.

Warning : For parallel calculation, the only possible partition will be according the axis of the model with the keyword `Tranche`.

See also: `condlim_base` ([12](#))

Usage:

paroi_echange_contact_correlation_vdf obj Lire obj {

```

    dir int
    tin float
    tsup float
    lambda str
    rho str
    cp float
    dt_impr float
    mu str
    debit float
    dh float
    volume str
    nu str
    [ reprise_correlation ]
}
where

```

- **dir** *int*: Direction (0 : axis X, 1 : axis Y, 2 : axis Z) of the 1D model.
- **tin** *float*: Inlet fluid temperature of the 1D model (oC or K).
- **tsup** *float*: Outlet fluid temperature of the 1D model (oC or K).
- **lambda** *str*: Thermal conductivity of the fluid (W.m-1.K-1).
- **rho** *str*: Mass density of the fluid (kg.m-3) which may be a function of the temperature T.
- **cp** *float*: Calorific capacity value at a constant pressure of the fluid (J.kg-1.K-1).
- **dt_impr** *float*: Printing period in name_of_data_file_time.dat files of the 1D model results.
- **mu** *str*: Dynamic viscosity of the fluid (kg.m-1.s-1) which may be a function of the temperature T.
- **debit** *float*: Surface flow rate (kg.s-1.m-2) of the fluid into the channel.
- **dh** *float*: Hydraulic diameter may be a function f(x) with x position along the 1D axis (xinf <= x <= xsup)
- **volume** *str*: Exact volume of the 1D domain (m3) which may be a function of the hydraulic diameter (Dh) and the lateral surface (S) of the meshed boundary.
- **nu** *str*: Nusselt number which may be a function of the Reynolds number (Re) and the Prandtl number (Pr).
- **reprise_correlation** : Keyword in the case of a resuming calculation with this correlation.

12.42 paroi_echange_contact_correlation_vef

Description: Class to define a thermohydraulic 1D model which will apply to a boundary of 2D or 3D domain.

Warning : For parallel calculation, the only possible partition will be according the axis of the model with the keyword `Tranche_geom`.

See also: `condlim_base` ([12](#))

Usage:

paroi_echange_contact_correlation_vef obj Lire obj {

```

    dir int
    tin float
    tsup float
    lambda str
    rho str
    cp float
    dt_impr float
    mu str

```

```

    debit float
    dh float
    n int
    surface str
    nu str
    xinf float
    xsup float
    [ emissivite_pour_rayonnement_entre_deux_plaques_quasi_infinies float ]
    [ reprise_correlation ]
}
where

```

- **dir** *int*: Direction (0 : axis X, 1 : axis Y, 2 : axis Z) of the 1D model.
- **tinf** *float*: Inlet fluid temperature of the 1D model (oC or K).
- **tsup** *float*: Outlet fluid temperature of the 1D model (oC or K).
- **lambda** *str*: Thermal conductivity of the fluid (W.m-1.K-1).
- **rho** *str*: Mass density of the fluid (kg.m-3) which may be a function of the temperature T.
- **cp** *float*: Calorific capacity value at a constant pressure of the fluid (J.kg-1.K-1).
- **dt Impr** *float*: Printing period in name_of_data_file_time.dat files of the 1D model results.
- **mu** *str*: Dynamic viscosity of the fluid (kg.m-1.s-1) which may be a function of the temperature T.
- **debit** *float*: Surface flow rate (kg.s-1.m-2) of the fluid into the channel.
- **dh** *float*: Hydraulic diameter may be a function f(x) with x position along the 1D axis (xinf <= x <= xsup)
- **n** *int*: Number of 1D cells of the 1D mesh.
- **surface** *str*: Section surface of the channel which may be function f(Dh,x) of the hydraulic diameter (Dh) and x position along the 1D axis (xinf <= x <= xsup)
- **nu** *str*: Nusselt number which may be a function of the Reynolds number (Re) and the Prandtl number (Pr).
- **xinf** *float*: Position of the inlet of the 1D mesh on the axis direction.
- **xsup** *float*: Position of the outlet of the 1D mesh on the axis direction.
- **emissivite_pour_rayonnement_entre_deux_plaques_quasi_infinies** *float*: Coefficient of emissivity for radiation between two quasi infinite plates.
- **reprise_correlation** : Keyword in the case of a resuming calculation with this correlation.

12.43 paroi_echange_contact_odvm_vdf

Description: not_set

See also: paroi_echange_contact_vdf ([12.45](#))

Usage:

```

paroi_echange_contact_odvm_vdf autrepb nameb temp h
where

```

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **temp** *str*: Name of field.
- **h** *float*: Value assigned to a coefficient (expressed in W.K-1m-2) that characterises the contact between the two mediums. In order to model perfect contact, h must be taken to be infinite. This value must obviously be the same in both the two problems blocks.
The surface thermal flux exchanged between the two mediums is represented by :

$$f_i = h (T_1 - T_2) \text{ where } 1/h = d_1/\lambda_{d1} + 1/val_h_contact + d_2/\lambda_{d2}$$
 where di : distance between the node where Ti and the wall is found.

12.44 paroi_echange_contact_rayo_semi_transp_vdf

Description: Exchange boundary condition in VDF between the semi transparent fluid and the solid for a problem coupled with radiation.

See also: `paroi_echange_contact_vdf` ([12.45](#))

Usage:

paroi_echange_contact_rayo_semi_transp_vdf **autrepb** **nameb** **temp** **h**

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **temp** *str*: Name of field.
- **h** *float*: Value assigned to a coefficient (expressed in W.K-1m-2) that characterises the contact between the two mediums. In order to model perfect contact, h must be taken to be infinite. This value must obviously be the same in both the two problems blocks.
The surface thermal flux exchanged between the two mediums is represented by :
$$f_i = h (T_1 - T_2)$$
 where $1/h = d_1/\lambda_{a1} + 1/val_h_contact + d_2/\lambda_{a2}$
where d_i : distance between the node where T_i and the wall is found.

12.45 paroi_echange_contact_vdf

Description: Boundary condition type to model the heat flux between two problems. Important: the name of the boundaries in the two problems should be the same.

See also: `condlim_base` ([12](#)) `paroi_echange_contact_odvm_vdf` ([12.43](#)) `paroi_echange_contact_vdf_ft` ([12.46](#)) `exchange_contact_rayo_transp_vdf` ([12.7](#)) `paroi_echange_contact_rayo_semi_transp_vdf` ([12.44](#))

Usage:

paroi_echange_contact_vdf **autrepb** **nameb** **temp** **h**

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **temp** *str*: Name of field.
- **h** *float*: Value assigned to a coefficient (expressed in W.K-1m-2) that characterises the contact between the two mediums. In order to model perfect contact, h must be taken to be infinite. This value must obviously be the same in both the two problems blocks.
The surface thermal flux exchanged between the two mediums is represented by :
$$f_i = h (T_1 - T_2)$$
 where $1/h = d_1/\lambda_{a1} + 1/val_h_contact + d_2/\lambda_{a2}$
where d_i : distance between the node where T_i and the wall is found.

12.46 paroi_echange_contact_vdf_ft

Description: This boundary condition is used between a conduction problem and a thermohydraulic problem with two phases flow (Front-Tracking method) to modelize heat exchange.

See also: `paroi_echange_contact_vdf` ([12.45](#))

Usage:

paroi_echange_contact_vdf_ft **autrepb** **nameb** **temp** **h**

where

- **autrepb** *str*: Name of other problem.
- **nameb** *str*: Name of bord.
- **temp** *str*: Name of field.
- **h** *float*: Value assigned to a coefficient (expressed in W.K-1m-2) that characterises the contact between the two mediums. In order to model perfect contact, h must be taken to be infinite. This value must obviously be the same in both the two problems blocks.
The surface thermal flux exchanged between the two mediums is represented by :
$$f_i = h (T_1 - T_2)$$
 where $1/h = d_1/\lambda_{b1} + 1/\text{val_h_contact} + d_2/\lambda_{b2}$
where d_i : distance between the node where T_i and the wall is found.

12.47 paroi_echange_contact_vdf_zoom_fin

Description: External type exchange condition with a heat exchange coefficient and an imposed external temperature in the case of zoom (fine).

See also: [paroi_echange_externe_impose \(12.49\)](#)

Usage:

paroi_echange_contact_vdf_zoom_fin h_imp himpc text ch
where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.48 paroi_echange_contact_vdf_zoom_grossier

Description: External type exchange condition with a heat exchange coefficient and an imposed external temperature in the case of zoom (coarse).

See also: [paroi_echange_externe_impose \(12.49\)](#)

Usage:

paroi_echange_contact_vdf_zoom_grossier h_imp himpc text ch
where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.49 paroi_echange_externe_impose

Description: External type exchange condition with a heat exchange coefficient and an imposed external temperature.

See also: [condlim_base \(12\)](#) [paroi_echange_externe_impose_h \(12.50\)](#) [paroi_echange_externe_impose_rayo_transp \(12.52\)](#) [paroi_echange_externe_impose_rayo_semi_transp \(12.51\)](#) [paroi_echange_contact_vdf_zoom_grossier \(12.48\)](#) [paroi_echange_contact_vdf_zoom_fin \(12.47\)](#)

Usage:

paroi_echange_externe_impose h_imp himpc text ch

where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.50 paroi_echange_externe_impose_h

Description: Particular case of class `paroi_echange_externe_impose` for enthalpy equation.

See also: `paroi_echange_externe_impose` ([12.49](#))

Usage:

paroi_echange_externe_impose_h h_imp himpc text ch

where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.51 paroi_echange_externe_impose_rayo_semi_transp

Description: External type exchange condition for a coupled problem with radiation in semi transparent gas.

See also: `paroi_echange_externe_impose` ([12.49](#))

Usage:

paroi_echange_externe_impose_rayo_semi_transp h_imp himpc text ch

where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.52 paroi_echange_externe_impose_rayo_transp

Description: External type exchange condition for a coupled problem with radiation in transparent gas.

See also: `paroi_echange_externe_impose` ([12.49](#))

Usage:

paroi_echange_externe_impose_rayo_transp h_imp himpc text ch

where

- **h_imp** *str*: Heat exchange coefficient value (expressed in W.m-2.K-1).
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value (expressed in oC or K).
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.53 **paroi_echange_global_impose**

Description: Global type exchange condition (internal) that is to say that diffusion on the first fluid mesh is not taken into consideration.

See also: [condlim_base \(12\)](#)

Usage:

paroi_echange_global_impose h_imp himpc text ch
where

- **h_imp** *str*: Global exchange coefficient value. The global exchange coefficient value is expressed in $\text{W.m}^{-2}\text{.K}^{-1}$.
- **himpc** *champ_front_base* ([17.1](#)): Boundary field type.
- **text** *str*: External temperature value. The external temperature value is expressed in $^{\circ}\text{C}$ or K .
- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.54 **paroi_fixe**

Description: Keyword to designate a situation of adherence to the wall called bord (edge) (normal and tangential velocity at the edge is zero).

See also: [condlim_base \(12\)](#) [paroi_fixe_iso_Genepi2_sans_contribution_aux_vitesses_sommets \(12.55\)](#)

Usage:

paroi_fixe

12.55 **paroi_fixe_iso_Genepi2_sans_contribution_aux_vitesses_sommets**

Description: Boundary condition to obtain iso Genepi2, without interest

See also: [paroi_fixe \(12.54\)](#)

Usage:

paroi_fixe_iso_Genepi2_sans_contribution_aux_vitesses_sommets

12.56 **paroi_flux_impose**

Description: Normal flux condition at the wall called bord (edge). The surface area of the flux (W.m^{-1} in 2D or W.m^{-2} in 3D) is imposed at the boundary according to the following convention: a positive flux is a flux that enters into the domain according to convention.

See also: [condlim_base \(12\)](#) [paroi_flux_impose_rayo_transp \(12.59\)](#) [paroi_flux_impose_rayo_semi_transp_vdf \(12.57\)](#) [paroi_flux_impose_rayo_semi_transp_vef \(12.58\)](#)

Usage:

paroi_flux_impose ch
where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.57 **paroi_flux_impose_rayo_semi_transp_vdf**

Description: Normal flux condition at the wall called bord (edge) for a radiation problem in semi transparent gas (in VDF).

See also: `paroi_flux_impose` ([12.56](#))

Usage:

paroi_flux_impose_rayo_semi_transp_vdf **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.58 **paroi_flux_impose_rayo_semi_transp_vef**

Description: Normal flux condition at the wall called bord (edge) for a radiation problem in semi transparent gas (in VEF).

See also: `paroi_flux_impose` ([12.56](#))

Usage:

paroi_flux_impose_rayo_semi_transp_vef **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.59 **paroi_flux_impose_rayo_transp**

Description: Normal flux condition at the wall called bord (edge) for a radiation problem in transparent gas.

See also: `paroi_flux_impose` ([12.56](#))

Usage:

paroi_flux_impose_rayo_transp **ch**

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.60 **paroi_ft_disc**

Description: Boundary condition for Front-Tracking problem in the discontinuous version.

See also: `condlim_base` ([12](#))

Usage:

paroi_ft_disc **type**

where

- **type** *paroi_ft_disc_deriv* ([12.61](#)): Symetrie condition.

12.61 paroi_ft_disc_deriv

Description: not_set

See also: objet_lecture (36) symetrie (12.61.1) constant (12.61.2)

Usage:

paroi_ft_disc_deriv

12.61.1 symetrie

Description: Symetrie condition in the case of two-phase flows

See also: paroi_ft_disc_deriv (12.61)

Usage:

symetrie

12.61.2 constant

Description: condition contact angle fidex. The angle is measured between the wall and the interface in the phase 0.

See also: paroi_ft_disc_deriv (12.61)

Usage:

constant ch

where

- **ch** *champ_front_base* (17.1): Boundary field type.

12.62 paroi_knudsen_non_negligeable

Description: Boundary condition for number of Knudsen (Kn) above 0.001 where slip-flow condition appears: the velocity near the wall depends on the shear stress : $Kn=l/L$ with l is the mean-free-path of the molecules and L a characteristic length scale.

$U(y=0)-U_{wall}=k(dU/dY)$

Where k is a coefficient given by several laws:

Mawxell : $k=(2-s)*l/s$

Bestok&Karniadakis : $k=(2-s)/s*L*Kn/(1+Kn)$

Xue&Fan : $k=(2-s)/s*L*tanh(Kn)$

s is a value between 0 and 2 named accomodation coefficient. $s=1$ seems a good value.

Warning : The keyword is available for VDF calculation only for the moment.

See also: dirichlet (12.6)

Usage:

paroi_knudsen_non_negligeable name_champ_1 champ_1 name_champ_2 champ_2

where

- **name_champ_1** *str into ['vitesse_paro', 'k']*: Field name.
- **champ_1** *champ_front_base* (17.1): Boundary field type.
- **name_champ_2** *str into ['vitesse_paro', 'k']*: Field name.
- **champ_2** *champ_front_base* (17.1): Boundary field type.

12.63 paroi_rugueuse

Description: Rough wall boundary

See also: [dirichlet \(12.6\)](#)

Usage:

paroi_rugueuse obj Lire obj {

erugu *float*

}

where

- **erugu** *float*: Constant value for roughness

12.64 paroi_temperature_imposee

Description: Imposed temperature condition at the wall called bord (edge).

See also: [dirichlet \(12.6\)](#) [temperature_imposee_paro \(12.72\)](#) [paroi_temperature_imposee_rayo_transp \(12.66\)](#) [paroi_temperature_imposee_rayo_semi_transp \(12.65\)](#)

Usage:

paroi_temperature_imposee **ch**

where

- **ch** *champ_front_base (17.1)*: Boundary field type.

12.65 paroi_temperature_imposee_rayo_semi_transp

Description: Imposed temperature condition at the wall called bord (edge) for a radiation problem in semi transparent gas.

See also: [paroi_temperature_imposee \(12.64\)](#)

Usage:

paroi_temperature_imposee_rayo_semi_transp **ch**

where

- **ch** *champ_front_base (17.1)*: Boundary field type.

12.66 paroi_temperature_imposee_rayo_transp

Description: Imposed temperature condition at the wall called bord (edge) for a radiation problem in transparent gas.

See also: [paroi_temperature_imposee \(12.64\)](#)

Usage:

paroi_temperature_imposee_rayo_transp **ch**

where

- **ch** *champ_front_base (17.1)*: Boundary field type.

12.67 periodique

Description: 1). For Navier-Stokes equations, this keyword is used to indicate that the horizontal inlet velocity values are the same as the outlet velocity values, at every moment. As regards meshing, the inlet and outlet edges bear the same name.; 2). For scalar transport equation, this keyword is used to set a periodic condition on scalar. The two edges dealing with this periodic condition bear the same name.

See also: `condlim_base` ([12](#))

Usage:

periodique

12.68 scalaire_impose_paro

Description: Imposed temperature condition at the wall called bord (edge).

See also: `dirichlet` ([12.6](#))

Usage:

scalaire_impose_paro ch

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.69 sortie_libre_rho_variable

Description: Class to define an outlet boundary condition at which the pressure is defined through the given field, whereas the density of the two-phase flow may varies (value of P/ρ given in $\text{Pa}/\text{kg}\cdot\text{m}^{-3}$).

See also: `condlim_base` ([12](#))

Usage:

sortie_libre_rho_variable ch

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.70 sortie_libre_temperature_imposee_h

Description: Open boundary for heat equation with enthalpy as unknown.

See also: `neumann` ([12.35](#))

Usage:

sortie_libre_temperature_imposee_h ch

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

12.71 symetrie

Description: 1). For Navier-Stokes equations, this keyword is used to designate a symmetry condition concerning the velocity at the boundary called bord (edge) (normal velocity at the edge equal to zero and tangential velocity gradient at the edge equal to zero); 2). For scalar transport equation, this keyword is used to set a symmetry condition on scalar on the boundary named bord (edge).

See also: `condlim_base` ([12](#))

Usage:

symetrie

12.72 temperature_imposee_pari

Description: Imposed temperature condition at the wall called bord (edge).

See also: `pari_temperature_imposee` ([12.64](#))

Usage:

temperature_imposee_pari ch

where

- **ch** *champ_front_base* ([17.1](#)): Boundary field type.

13 discretisation_base

Description: Basic class for space discretization of thermohydraulic turbulent problems.

See also: `objet_u` ([37](#)) `vdf` ([13.4](#)) `vef` ([13.5](#)) `covimac` ([13.1](#)) `polymac` ([13.3](#)) `ef` ([13.2](#))

Usage:

13.1 covimac

Description: `covimac` discretization.

See also: `discretisation_base` ([13](#))

Usage:

13.2 ef

Description: Element Finite discretization.

See also: `discretisation_base` ([13](#))

Usage:

13.3 polymac

Description: `polymac` discretization.

See also: `discretisation_base` ([13](#))

Usage:

13.4 vdf

Description: Finite difference volume discretization.

See also: discretisation_base (13)

Usage:

13.5 vef

Description: Finite element volume discretization (P1NC/P0 element)

Warning: it becomes an obsolete discretization.

See also: discretisation_base (13) vefprep1b (13.6)

Usage:

13.6 vefprep1b

Description: Finite element volume discretization (P1NC/P1-bubble element). Since the 1.5.5 version, several new discretizations are available thanks to the optional keyword Read. By default, the VEFPreP1B keyword is equivalent to the former VEFPreP1B formulation (v1.5.4 and sooner). P0P1 (if used with the strong formulation for imposed pressure boundary) is equivalent to VEFPreP1B but the convergence is slower. VEFPreP1B dis is equivalent to VEFPreP1B dis Read dis { P0 P1 Changement_de_base_P1Bulle 1 Cl_pression_sommet_faible 0 }

See also: vef (13.5)

Usage:

```
vefprep1b obj Lire obj {  
    [ changement_de_base_p1bulle int]  
    [ p0 ]  
    [ p1 ]  
    [ pa ]  
    [ rt ]  
    [ modif_div_face_dirichlet int]  
    [ cl_pression_sommet_faible int]  
}
```

where

- **changement_de_base_p1bulle** *int*: (into=[0,1]) **changement_de_base_p1bulle** 1 This option may be used to have the P1NC/P0P1 formulation (value set to 0) or the P1NC/P1Bulle formulation (value set to 1, the default).
- **p0** : Pressure nodes are added on element centres
- **p1** : Pressure nodes are added on vertices
- **pa** : Only available in 3D, pressure nodes are added on bones
- **rt** : For P1NCP1B
- **modif_div_face_dirichlet** *int*: (into=[0,1]) This option (by default 0) is used to extend control volumes for the momentum equation.

- **cl_pression_sommet_faible** *int*: (into=[0,1]) This option is used to specify a strong formulation (value set to 0, the default) or a weak formulation (value set to 1) for an imposed pressure boundary condition. The first formulation converges quicker and is stable in general cases. The second formulation should be used if there are several outlet boundaries with Neumann condition (see `Ecoulement_Neumann` test case for example).

14 domaine

Description: Keyword to create a domain.

See also: `objet_u` (37) `domaine_ale` (14.1)

Usage:

14.1 domaine_ale

Description: Domain with nodes at the interior of the domain which are displaced in an arbitrarily prescribed way thanks to ALE (Arbitrary Lagrangian-Eulerian) description.

Keyword to specify that the domain is mobile following the displacement of some of its boundaries.

See also: `domaine` (14)

Usage:

15 espece

Description: `not_set`

See also: `objet_u` (37)

Usage:

```
espece obj Lire obj {
    cp champ_base
    mu champ_base
    masse_molaire float
}
```

where

- **cp** *champ_base* (16.1): Specific heat value (J.kg-1.K-1).
- **mu** *champ_base* (16.1): Dynamic viscosity value (kg.m-1.s-1).
- **masse_molaire** *float*: Gas molar mass.

16 champ_base

16.1 champ_base

Description: Basic class of fields.

See also: `objet_u` (37) `champ_don_base` (16.6) `champ_ostwald` (16.20) `champ_input_base` (16.18) `champ_fonc_med` (16.11) `field_uniform_keps_from_ud` (16.28)

Usage:

16.2 Champ_Fonc_MED_Tabule

Description: not_set

See also: champ_fonc_med ([16.11](#))

Usage:

Champ_Fonc_MED_Tabule [**use_existing_domain**] [**last_time**] [**option**] **filename domain_name**
field_name location time

where

- **use_existing_domain** *str* into [*'use_existing_domain'*]
- **last_time** *str* into [*'last_time'*]: to use the last time of the MED file instead of the specified time.
- **option** *decoup* ([16.3](#)): Keyword for a partition file
- **filename** *str*: Name of the .med file.
- **domain_name** *str*: Name of the domain.
- **field_name** *str*: Name of the problem unknown.
- **location** *str* into [*'som'*, *'elem'*]: To indicate where the field has been post-processed.
- **time** *float*: Time of the field in the .med file.

16.3 decoup

Description: Optional keyword

See also: objet_lecture ([36](#))

Usage:

key nom

where

- **key** *str* into [*'decoup'*]: Name of for a partition file
- **nom** *str*: Name of for a partition file

16.4 Champ_Fonc_MEDfile

Description: Obsolete keyword to read a field with MED file API

See also: champ_fonc_med ([16.11](#))

Usage:

Champ_Fonc_MEDfile [**use_existing_domain**] [**last_time**] [**option**] **filename domain_name**
field_name location time

where

- **use_existing_domain** *str* into [*'use_existing_domain'*]
- **last_time** *str* into [*'last_time'*]: to use the last time of the MED file instead of the specified time.
- **option** *decoup* ([16.3](#)): Keyword for a partition file
- **filename** *str*: Name of the .med file.
- **domain_name** *str*: Name of the domain.
- **field_name** *str*: Name of the problem unknown.
- **location** *str* into [*'som'*, *'elem'*]: To indicate where the field has been post-processed.
- **time** *float*: Time of the field in the .med file.

16.5 Champ_Tabule_Morceaux

Description: set Tabulated field by sub-zone

See also: [champ_don_base \(16.6\)](#)

Usage:

Champ_Tabule_Morceaux **dom_name** **nb_comp** **data**

where

- **dom_name** *str*: Name of the domain
- **nb_comp** *int*: Number of field components.
- **data** *bloc_lecture* (3.9): subzone_1 nb_comp InputFieldName { table_dim InputFieldVal_1 InputFieldVal_2 OutputFieldVal_1 OutputFieldVal_2 ... } subzone_2 nb_comp InputFieldName { table_dim InputFieldVal_1 InputFieldVal_2 OutputFieldVal_1 OutputFieldVal_2 ... } subzone_n nb_comp InputFieldName { table_dim InputFieldVal_1 InputFieldVal_2 OutputFieldVal_1 OutputFieldVal_2 ... }

16.6 champ_don_base

Description: Basic class for data fields (not calculated), p.e. physics properties.

See also: [champ_base \(16.1\)](#) [uniform_field \(16.31\)](#) [champ_uniforme_morceaux \(16.24\)](#) [champ_fonc_xyz \(16.27\)](#) [champ_fonc_txyz \(16.26\)](#) [champ_don_lu \(16.7\)](#) [init_par_partie \(16.29\)](#) [champ_tabule_temps \(16.23\)](#) [champ_fonc_t \(16.14\)](#) [champ_fonc_tabule \(16.15\)](#) [champ_init_canal_sinal \(16.16\)](#) [champ_som_lu_vdf \(16.21\)](#) [champ_som_lu_vef \(16.22\)](#) [tayl_green \(16.30\)](#) [champ_fonc_reprise \(16.12\)](#) [Champ_Tabule_Morceaux \(16.5\)](#) [champ_fonc_fonction_txyz_morceaux \(16.10\)](#)

Usage:

16.7 champ_don_lu

Description: Field to read a data field (values located at the center of the cells) in a file.

See also: [champ_don_base \(16.6\)](#)

Usage:

champ_don_lu **dom** **nb_comp** **file**

where

- **dom** *str*: Name of the domain.
- **nb_comp** *int*: Number of field components.
- **file** *str*: Name of the file.
This file has the following format:
nb_val_lues -> Number of values readen in th file
Xi Yi Zi -> Coordinates readen in the file
Ui Vi Wi -> Value of the field

16.8 champ_fonc_fonction

Description: Field that is a function of another field.

See also: [champ_fonc_tabule \(16.15\)](#) [champ_fonc_fonction_txyz \(16.9\)](#)

Usage:

champ_fonc_fonction inco expression

where

- **inco** *str*: Name of the field (for example: temperature).
- **expression** *n word1 word2 ... wordn*: Number of field components followed by the analytical expression for each field component.

16.9 champ_fonc_fonction_txyz

Description: this refers to a field that is a function of another field and time and/or space coordinates

See also: `champ_fonc_fonction` ([16.8](#))

Usage:

champ_fonc_fonction_txyz inco expression

where

- **inco** *str*: Name of the field (for example: temperature).
- **expression** *n word1 word2 ... wordn*: Number of field components followed by the analytical expression for each field component.

16.10 champ_fonc_fonction_txyz_morceaux

Description: Field defined by analytical functions in each sub-zone. It makes possible the definition of a field that depends on the time and the space.

See also: `champ_don_base` ([16.6](#))

Usage:

champ_fonc_fonction_txyz_morceaux problem_name inco nb_comp data

where

- **problem_name** *str*: Name of the problem.
- **inco** *str*: Name of the field (for example: temperature).
- **nb_comp** *int*: Number of field components.
- **data** *bloc_lecture* ([3.9](#)): { Defaut val_def sous_zone_1 val_1 ... sous_zone_i val_i } By default, the value val_def is assigned to the field. It takes the sous_zone_i identifier Sous_Zone (sub_area) type object function, val_i. Sous_Zone (sub_area) type objects must have been previously defined if the operator wishes to use a `champ_fonc_fonction_txyz_morceaux` type object.

16.11 champ_fonc_med

Description: Field to read a data field in a MED-format file .med at a specified time. It is very useful, for example, to resume a calculation with a new or refined geometry. The field post-processed on the new geometry at med format is used as initial condition for the resume.

See also: `champ_base` ([16.1](#)) `Champ_Fonc_MED_Tabule` ([16.2](#)) `Champ_Fonc_MEDfile` ([16.4](#))

Usage:

champ_fonc_med [use_existing_domain] [last_time] [option] filename domain_name field_name location time

where

- **use_existing_domain** *str* into ['use_existing_domain']
- **last_time** *str* into ['last_time']: to use the last time of the MED file instead of the specified time.
- **option** *decoup* (16.3): Keyword for a partition file
- **filename** *str*: Name of the .med file.
- **domain_name** *str*: Name of the domain.
- **field_name** *str*: Name of the problem unknown.
- **location** *str* into ['som', 'elem']: To indicate where the field has been post-processed.
- **time** *float*: Time of the field in the .med file.

16.12 champ_fonc_reprise

Description: This field is used to read a data field in a save file (.xyz or .sauv) at a specified time. It is very useful, for example, to run a thermohydraulic calculation with velocity initial condition read into a save file from a previous hydraulic calculation.

See also: champ_don_base (16.6)

Usage:

champ_fonc_reprise [**format**] **filename** **pb_name** **champ** [**fonction**] **temps**

where

- **format** *str* into ['binaire', 'formatte', 'xyz', 'single_hdf']: Type of file (the file format). If xyz format is activated, the .xyz file from the previous calculation will be given for filename, and if formatte or binaire is choosen, the .sauv file of the previous calculation will be specified for filename. In the case of a parallel calculation, if the mesh partition does not changed between the previous calculation and the next one, the binaire format should be preferred, because is faster than the xyz format. If single_hdf is used, the same constraints/advantages as binaire apply, but a single (HDF5) file is produced on the filesystem instead of having one file per processor.
- **filename** *str*: Name of the save file.
- **pb_name** *str*: Name of the problem.
- **champ** *str*: Name of the problem unknown. It may also be the temporal average of a problem unknown (like moyenne_vitesse, moyenne_temperature,...)
- **fonction** *fonction_champ_reprise* (16.13): Optional keyword to apply a function on the field being read in the save file (e.g. to read a temperature field in Celsius units and convert it for the calculation on Kelvin units, you will use: fonction 1 273.+val)
- **temps** *str*: Time of the saved field in the save file or last_time. If you give the keyword last_time instead, the last time saved in the save file will be used.

16.13 fonction_champ_reprise

Description: not_set

See also: objet_lecture (36)

Usage:

mot fonction

where

- **mot** *str* into ['fonction']
- **fonction** *n word1 word2 ... wordn*: n f1(val) f2(val) ... fn(val)] time

16.14 champ_fonc_t

Description: Field that is constant in space and is a function of time.

See also: champ_don_base (16.6)

Usage:

champ_fonc_t val

where

- **val** *n word1 word2 ... wordn*: Values of field components (time dependant functions).

16.15 champ_fonc_tabule

Description: Field that is tabulated as a function of another field.

See also: champ_don_base (16.6) champ_fonc_fonction (16.8)

Usage:

champ_fonc_tabule inco dim bloc

where

- **inco** *str*: Name of the field (for example: temperature).
- **dim** *int*: Number of field components.
- **bloc** *bloc_lecture* (3.9): Values (the table (the value of the field at any time is calculated by linear interpolation from this table) or the analytical expression (with keyword expression to use an analytical expression)).

16.16 champ_init_canal_sinal

Description: For a parabolic profile on U velocity with an unpredictable disturbance on V and W and a sinusoidal disturbance on V velocity.

See also: champ_don_base (16.6)

Usage:

champ_init_canal_sinal dim bloc

where

- **dim** *int*: Number of field components.
- **bloc** *bloc_lec_champ_init_canal_sinal* (16.17): Parameters for the class champ_init_canal_sinal.

16.17 bloc_lec_champ_init_canal_sinal

Description: Parameters for the class champ_init_canal_sinal.

in 2D:

$U = u_{cent} * y(2h - y) / h / h$

$V = ampli_bruit * rand + ampli_sin * \sin(\omega * x)$

rand: unpredictable value between -1 and 1.

in 3D:

$U = u_{cent} * y(2h - y) / h / h$

$V = ampli_bruit * rand1 + ampli_sin * \sin(\omega * x)$

$W = ampli_bruit * rand2$

rand1 and rand2: unpredictable values between -1 and 1.

See also: [objet_lecture \(36\)](#)

Usage:

```
{  
  
    ucent float  
    h float  
    ampli_bruit float  
    [ ampli_sin float]  
    omega float  
    [ dir_flow int into [0, 1, 2]]  
    [ dir_wall int into [0, 1, 2]]  
    [ min_dir_flow float]  
    [ min_dir_wall float]  
  
}
```

where

- **ucent** *float*: Velocity value at the center of the channel.
- **h** *float*: Half length of the channel.
- **ampli_bruit** *float*: Amplitude for the disturbance.
- **ampli_sin** *float*: Amplitude for the sinusoidal disturbance (by default equals to ucent/10).
- **omega** *float*: Value of pulsation for the of the sinusoidal disturbance.
- **dir_flow** *int into [0, 1, 2]*: Flow direction for the initialization of the flow in a channel.
 - if dir_flow=0, the flow direction is X
 - if dir_flow=1, the flow direction is Y
 - if dir_flow=2, the flow direction is ZDefault value for dir_flow is 0
- **dir_wall** *int into [0, 1, 2]*: Wall direction for the initialization of the flow in a channel.
 - if dir_wall=0, the normal to the wall is in X direction
 - if dir_wall=1, the normal to the wall is in Y direction
 - if dir_wall=2, the normal to the wall is in Z directionDefault value for dir_flow is 1
- **min_dir_flow** *float*: Value of the minimum coordinate in the flow direction for the initialization of the flow in a channel. Default value for dir_flow is 0.
- **min_dir_wall** *float*: Value of the minimum coordinate in the wall direction for the initialization of the flow in a channel. Default value for dir_flow is 0.

16.18 champ_input_base

Description: not_set

See also: [champ_base \(16.1\)](#) [champ_input_p0 \(16.19\)](#)

Usage:

champ_input_base obj Lire obj {

```
    nb_comp int  
    nom str  
    [ initial_value n x1 x2 ... xn]  
    probleme str  
    [ sous_zone str]
```


}
where

- **nb_comp** *int*
- **nom** *str*
- **initial_value** *n x1 x2 ... xn*
- **probleme** *str*
- **sous_zone** *str*

16.19 champ_input_p0

Description: not_set

See also: champ_input_base ([16.18](#))

Usage:

champ_input_p0 obj Lire obj {

nb_comp *int*
nom *str*
[**initial_value** *n x1 x2 ... xn*]
probleme *str*
[**sous_zone** *str*]

}
where

- **nb_comp** *int* for inheritance
- **nom** *str* for inheritance
- **initial_value** *n x1 x2 ... xn* for inheritance
- **probleme** *str* for inheritance
- **sous_zone** *str* for inheritance

16.20 champ_ostwald

Description: This keyword is used to define the viscosity variation law:

$\mu(T) = K(T) \cdot (D:D/2)^{((n-1)/2)}$

See also: champ_base ([16.1](#))

Usage:

champ_ostwald

16.21 champ_som_lu_vdf

Description: Keyword to read in a file values located at the nodes of a mesh in VDF discretization.

See also: champ_don_base ([16.6](#))

Usage:

champ_som_lu_vdf **domain_name** **dim** **tolerance** **file**

where

- **domain_name** *str*: Name of the domain.

- **dim** *int*: Value of the dimension of the field.
- **tolerance** *float*: Value of the tolerance to check the coordinates of the nodes.
- **file** *str*: name of the file
This file has the following format:
Xi Yi Zi -> Coordinates of the node
Ui Vi Wi -> Value of the field on this node
Xi+1 Yi+1 Zi+1 -> Next point
Ui+1 Vi+1 Zi+1 -> Next value ...

16.22 champ_som_lu_vef

Description: Keyword to read in a file values located at the nodes of a mesh in VEF discretization.

See also: champ_don_base (16.6)

Usage:

champ_som_lu_vef domain_name dim tolerance file
where

- **domain_name** *str*: Name of the domain.
- **dim** *int*: Value of the dimension of the field.
- **tolerance** *float*: Value of the tolerance to check the coordinates of the nodes.
- **file** *str*: Name of the file.
This file has the following format:
Xi Yi Zi -> Coordinates of the node
Ui Vi Wi -> Value of the field on this node
Xi+1 Yi+1 Zi+1 -> Next point
Ui+1 Vi+1 Zi+1 -> Next value ...

16.23 champ_tabule_temps

Description: Field that is constant in space and tabulated as a function of time.

See also: champ_don_base (16.6)

Usage:

champ_tabule_temps dim bloc
where

- **dim** *int*: Number of field components.
- **bloc** *bloc_lecture* (3.9): Values as a table. The value of the field at any time is calculated by linear interpolation from this table.

16.24 champ_uniforme_morceaux

Description: Field which is partly constant in space and stationary.

See also: champ_don_base (16.6) champ_uniforme_morceaux_tabule_temps (16.25) valeur_totale_sur-volume (16.32)

Usage:

champ_uniforme_morceaux nom_dom nb_comp data
where

- **nom_dom** *str*: Name of the domain to which the sub-areas belong.
- **nb_comp** *int*: Number of field components.
- **data** *bloc_lecture* (3.9): { Defaut val_def sous_zone_1 val_1 ... sous_zone_i val_i } By default, the value val_def is assigned to the field. It takes the sous_zone_i identifier Sous_Zone (sub_area) type object value, val_i. Sous_Zone (sub_area) type objects must have been previously defined if the operator wishes to use a Champ_Uniforme_Morceaux(partly_uniform_field) type object.

16.25 champ_uniforme_morceaux_tabule_temps

Description: this type of field is constant in space on one or several sub_zones and tabulated as a function of time.

See also: champ_uniforme_morceaux (16.24)

Usage:

champ_uniforme_morceaux_tabule_temps nom_dom nb_comp data
where

- **nom_dom** *str*: Name of the domain to which the sub-areas belong.
- **nb_comp** *int*: Number of field components.
- **data** *bloc_lecture* (3.9): { Defaut val_def sous_zone_1 val_1 ... sous_zone_i val_i } By default, the value val_def is assigned to the field. It takes the sous_zone_i identifier Sous_Zone (sub_area) type object value, val_i. Sous_Zone (sub_area) type objects must have been previously defined if the operator wishes to use a Champ_Uniforme_Morceaux(partly_uniform_field) type object.

16.26 champ_fonc_txyz

Description: Field defined by analytical functions. It makes it possible the definition of a field that depends on the time and the space.

See also: champ_don_base (16.6)

Usage:

champ_fonc_txyz dom val
where

- **dom** *str*: Name of domain of calculation.
- **val** *n word1 word2 ... wordn*: List of functions on (t,x,y,z).

16.27 champ_fonc_xyz

Description: Field defined by analytical functions. It makes it possible the definition of a field that depends on (x,y,z).

See also: champ_don_base (16.6)

Usage:

champ_fonc_xyz dom val
where

- **dom** *str*: Name of domain of calculation.
- **val** *n word1 word2 ... wordn*: List of functions on (x,y,z).

16.28 field_uniform_keps_from_ud

Description: field which allows to impose on a domain K and EPS values derived from U velocity and D hydraulic diameter

See also: champ_base ([16.1](#))

Usage:

field_uniform_keps_from_ud obj Lire obj {

u *float*

d *float*

}

where

- **u** *float*: value of velocity specified in boundary condition.
- **d** *float*: value of hydraulic diameter specified in boundary condition

16.29 init_par_partie

Description: ne marche que pour n_comp=1

See also: champ_don_base ([16.6](#))

Usage:

init_par_partie n_comp val1 val2 val3

where

- **n_comp** *int* into [1]
- **val1** *float*
- **val2** *float*
- **val3** *float*

16.30 tayl_green

Description: Class Tayl_green.

See also: champ_don_base ([16.6](#))

Usage:

tayl_green dim

where

- **dim** *int*: Dimension.

16.31 uniform_field

Synonymous: **champ_uniforme**

Description: Field that is constant in space and stationary.

See also: champ_don_base ([16.6](#))

Usage:

uniform_field **val**

where

- **val** *n x1 x2 ... xn*: Values of field components.

16.32 valeur_totale_sur_volume

Description: Similar as Champ_Uniforme_Morceaux with the same syntax. Used for source terms when we want to specify a source term with a value given for the volume (eg: heat in Watts) and not a value per volume unit (eg: heat in Watts/m3).

See also: champ_uniforme_morceaux (16.24)

Usage:

valeur_totale_sur_volume **nom_dom** **nb_comp** **data**

where

- **nom_dom** *str*: Name of the domain to which the sub-areas belong.
- **nb_comp** *int*: Number of field components.
- **data** *bloc_lecture* (3.9): { Default val_def sous_zone_1 val_1 ... sous_zone_i val_i } By default, the value val_def is assigned to the field. It takes the sous_zone_i identifier Sous_Zone (sub_area) type object value, val_i. Sous_Zone (sub_area) type objects must have been previously defined if the operator wishes to use a Champ_Uniforme_Morceaux(partly_uniform_field) type object.

17 champ_front_base

17.1 champ_front_base

Description: Basic class for fields at domain boundaries.

See also: objet_u (37) champ_front_uniforme (17.33) champ_front_fonc_xyz (17.25) champ_front_fonc_txyz (17.24) champ_front_fonc_pois_ipsn (17.21) champ_front_fonc_pois_tube (17.22) champ_front_tabule (17.31) champ_front_fonction (17.26) champ_front_bruite (17.14) champ_front_tangentiel_vef (17.32) champ_front_lu (17.27) boundary_field_inward (17.9) champ_front_pression_from_u (17.29) champ_front_contact_vef (17.18) champ_front_calc (17.15) champ_front_recyclage (17.30) ch_front_input (17.11) champ_front_normal_vef (17.28) champ_front_debit_massique (17.20) champ_front_debit (17.19) champ_front_xyz_debit (17.35) champ_front_fonc_t (17.23) champ_front_MED (17.13) Champ_front_debit_QC_VDF_fonc_t (17.6) Champ_front_debit_QC_VDF (17.5) champ_front_vortex (17.34) boundary_field_uniform_keps_from_ud (17.10) Champ_front_synt (17.7) champ_front_zoom (17.36) Champ_front_ale (17.4) Ch_front_input_ALE (17.3) Boundary_field_keps_from_ud (17.2)

Usage:

17.2 Boundary_field_keps_from_ud

Description: To specify a K-Eps inlet field with hydraulic diameter, speed, and turbulence intensity (VDF only)

See also: champ_front_base (17.1)

Usage:

Boundary_field_keps_from_ud obj Lire obj {

```

    u champ_front_base
    d float
    i float
}
where

```

- **u** *champ_front_base* (17.1): U 0 Initial velocity magnitude
- **d** *float*: Hydraulic diameter
- **i** *float*: Turbulence intensity [

17.3 Ch_front_input_ALE

Description: Class to define a boundary condition on a moving boundary of a mesh (only for the Arbitrary Lagrangian-Eulerian framework).

Example: Ch_front_input_ALE { nb_comp 3 nom VITESSE_IN_ALE probleme pb initial_value 3 1. 0. 0. }

See also: champ_front_base (17.1)

Usage:

17.4 Champ_front_ale

Description: Class to define a boundary condition on a moving boundary of a mesh (only for the Arbitrary Lagrangian-Eulerian framework).

See also: champ_front_base (17.1)

Usage:

Champ_front_ale **val**
where

- **val** *n word1 word2 ... wordn*:
Example: 2 -y*0.01 x*0.01

17.5 Champ_front_debit_QC_VDF

Description: This keyword is used to define a flow rate field for quasi-compressible fluids in VDF discretization. The flow rate is kept constant during a transient.

See also: champ_front_base (17.1)

Usage:

Champ_front_debit_QC_VDF **dimension** **liste** [**moyen**] **pb_name**
where

- **dimension** *int*: Problem dimension
- **liste** *bloc_lecture* (3.9): List of the mass flow rate values [kg/s/m2] with the following syntaxe: { val1 ... valdim }
- **moyen** *str*: Option to use rho mean value
- **pb_name** *str*: Problem name

17.6 Champ_front_debit_QC_VDF_fonc_t

Description: This keyword is used to define a flow rate field for quasi-compressible fluids in VDF discretization. The flow rate could be constant or time-dependent.

See also: `champ_front_base` ([17.1](#))

Usage:

Champ_front_debit_QC_VDF_fonc_t *dimension* *liste* [*moyen*] *pb_name*

where

- **dimension** *int*: Problem dimension
- **liste** *bloc_lecture* ([3.9](#)): List of the mass flow rate values [kg/s/m2] with the following syntaxe: { val1 ... valdim } where val1 ... valdim are constant or function of time.
- **moyen** *str*: Option to use rho mean value
- **pb_name** *str*: Problem name

17.7 Champ_front_synt

Description: Boundary condition to create the synthetic fluctuations as inlet boundary. Available only for 3D configurations.

See also: `champ_front_base` ([17.1](#))

Usage:

Champ_front_synt *dim* *bloc*

where

- **dim** *int*: Number of field components. It should be 3!
- **bloc** *bloc_lecture_turb_synt* ([17.8](#)): bloc containing the parameters of the synthetic turbulence

17.8 bloc_lecture_turb_synt

Description: bloc containing parameters of the synthetic turbulence

See also: `objet_lecture` ([36](#))

Usage:

{

moyenne *x1 x2 (x3)*
lengthScale *float*
nbModes *int*
turbKinEn *float*
p *float*
timeScale *float*
dir_fluct *x1 x2 (x3)*

}

where

- **moyenne** *x1 x2 (x3)*: Mean Velocity
- **lengthScale** *float*: Integral length scale
- **nbModes** *int*: Number of Fourier coefficients
- **turbKinEn** *float*: Turbulent kinetic energy

- **p** *float*: Wave number factor
- **timeScale** *float*: Integral time scale
- **dir_fluct** *x1 x2 (x3)*: direction of fluctuations

17.9 boundary_field_inward

Description: this field is used to define the normal vector field standard at the boundary in VDF or VEF discretization.

See also: `champ_front_base` ([17.1](#))

Usage:

boundary_field_inward obj Lire obj {

normal_value *str*

}

where

- **normal_value** *str*: normal vector value (positive value for a vector oriented outside to inside) which can depend of the time.

17.10 boundary_field_uniform_keps_from_ud

Description: field which allows to impose on a boundary K and EPS values derived from U velocity and D hydraulic diameter

See also: `champ_front_base` ([17.1](#))

Usage:

boundary_field_uniform_keps_from_ud obj Lire obj {

u *float*

d *float*

}

where

- **u** *float*: value of velocity
- **d** *float*: value of hydraulic diameter

17.11 ch_front_input

Description: `not_set`

See also: `champ_front_base` ([17.1](#)) `ch_front_input_uniforme` ([17.12](#))

Usage:

ch_front_input obj Lire obj {

nb_comp *int*

nom *str*

[**initial_value** *n x1 x2 ... xn*]

probleme *str*


```

    [ sous_zone  str]
}
where

```

- **nb_comp** *int*
- **nom** *str*
- **initial_value** $n \times 1 \ x2 \ \dots \ xn$
- **probleme** *str*
- **sous_zone** *str*

17.12 ch_front_input_uniforme

Description: for coupling, you can use `ch_front_input_uniforme` which is a `champ_front_uniforme`, which use an external value. It must be used with `Problem.setInputField`.

See also: `ch_front_input` ([17.11](#))

Usage:

```

ch_front_input_uniforme obj Lire obj {
    nb_comp  int
    nom      str
    [ initial_value   $n \times 1 \ x2 \ \dots \ xn$ ]
    probleme  str
    [ sous_zone      str]
}
where

```

- **nb_comp** *int* for inheritance
- **nom** *str* for inheritance
- **initial_value** $n \times 1 \ x2 \ \dots \ xn$ for inheritance
- **probleme** *str* for inheritance
- **sous_zone** *str* for inheritance

17.13 champ_front_MED

Description: Field allowing the loading of a boundary condition from a MED file using `Champ_fonc_med`

See also: `champ_front_base` ([17.1](#))

Usage:

```

champ_front_MED  champ_fonc_med
where

```

- **champ_fonc_med** *champ_base* ([16.1](#)): a `champ_fonc_med` loading the values of the unknown on a domain boundary

17.14 champ_front_bruite

Description: Field which is variable in time and space in a random manner.

See also: champ_front_base ([17.1](#))

Usage:

champ_front_bruite nb_comp bloc

where

- **nb_comp** *int*: Number of field components.
- **bloc** *bloc_lecture* ([3.9](#)): { [N val L val] Moyenne m_1.....[m_i] Amplitude A_1.....[A_i]}: Random noise: If N and L are not defined, the ith component of the field varies randomly around an average value m_i with a maximum amplitude A_i.
White noise: If N and L are defined, these two additional parameters correspond to L, the domain length and N, the number of nodes in the domain. Noise frequency will be between $2\pi/L$ and $2\pi N/(4L)$.
For example, formula for velocity: $u=U0(t)$ $v=U1(t)Uj(t)=Mj+2\cdot Aj\cdot\text{bruit_blanc}$ where bruit_blanc (white_noise) is the formula given in the mettre_a_jour (update) method of the Champ_front_bruite (noise_boundary_field) (Refer to the Ch_fr_bruite.cpp file).

17.15 champ_front_calc

Description: This keyword is used on a boundary to get a field from another boundary. The local and remote boundaries should have the same mesh. If not, the Champ_front_recyclage keyword could be used instead. It is used in the condition block at the limits of equation which itself refers to a problem called pb1. We are working under the supposition that pb1 is coupled to another problem.

See also: champ_front_base ([17.1](#))

Usage:

champ_front_calc problem_name bord field_name

where

- **problem_name** *str*: Name of the other problem to which pb1 is coupled.
- **bord** *str*: Name of the side which is the boundary between the 2 domains in the domain object description associated with the problem_name object.
- **field_name** *str*: Name of the field containing the value that the user wishes to use at the boundary. The field_name object must be recognized by the problem_name object.

17.16 champ_front_contact_rayo_semi_transp_vef

Description: This field is used on a boundary between a solid and fluid domain to exchange a calculated temperature at the contact face of the two domains according to the flux of the two problems with radiation in semi transparent fluid.

See also: champ_front_contact_vef ([17.18](#))

Usage:

champ_front_contact_rayo_semi_transp_vef local_pb local_boundary remote_pb remote_boundary

where

- **local_pb** *str*: Name of the problem.

- **local_boundary** *str*: Name of the boundary.
- **remote_pb** *str*: Name of the second problem.
- **remote_boundary** *str*: Name of the boundary in the second problem.

17.17 champ_front_contact_rayo_transp_vef

Description: This field is used on a boundary between a solid and fluid domain to exchange a calculated temperature at the contact face of the two domains according to the flux of the two problems with radiation in transparent fluid.

See also: `champ_front_contact_vef` ([17.18](#))

Usage:

champ_front_contact_rayo_transp_vef local_pb local_boundary remote_pb remote_boundary
where

- **local_pb** *str*: Name of the problem.
- **local_boundary** *str*: Name of the boundary.
- **remote_pb** *str*: Name of the second problem.
- **remote_boundary** *str*: Name of the boundary in the second problem.

17.18 champ_front_contact_vef

Description: This field is used on a boundary between a solid and fluid domain to exchange a calculated temperature at the contact face of the two domains according to the flux of the two problems.

See also: `champ_front_base` ([17.1](#)) `champ_front_contact_rayo_transp_vef` ([17.17](#)) `champ_front_contact-rayo_semi_transp_vef` ([17.16](#))

Usage:

champ_front_contact_vef local_pb local_boundary remote_pb remote_boundary
where

- **local_pb** *str*: Name of the problem.
- **local_boundary** *str*: Name of the boundary.
- **remote_pb** *str*: Name of the second problem.
- **remote_boundary** *str*: Name of the boundary in the second problem.

17.19 champ_front_debit

Description: This field is used to define a flow rate field instead of a velocity field for a Dirichlet boundary condition on Navier-Stokes equations.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_debit ch
where

- **ch** *champ_front_base* ([17.1](#)): uniform field in space to define the flow rate. It could be, for example, `champ_front_uniforme`, `ch_front_input_uniform` or `champ_front_fonc_txyz` that depends only on time.

17.20 champ_front_debit_massique

Description: This field is used to define a flow rate field using the density

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_debit_massique ch

where

- **ch** *champ_front_base* ([17.1](#)): uniform field in space to define the flow rate. It could be, for example, `champ_front_uniforme`, `ch_front_input_uniform` or `champ_front_fonc_txyz` that depends only on time.

17.21 champ_front_fonc_pois_ipsn

Description: Boundary field `champ_front_fonc_pois_ipsn`.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_fonc_pois_ipsn r_tube umoy r_loc

where

- **r_tube** *float*
- **umoy** *n x1 x2 ... xn*
- **r_loc** *x1 x2 (x3)*

17.22 champ_front_fonc_pois_tube

Description: Boundary field `champ_front_fonc_pois_tube`.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_fonc_pois_tube r_tube umoy r_loc r_loc_mult

where

- **r_tube** *float*
- **umoy** *n x1 x2 ... xn*
- **r_loc** *x1 x2 (x3)*
- **r_loc_mult** *n1 n2 (n3)*

17.23 champ_front_fonc_t

Description: Boundary field that depends only on time.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_fonc_t val

where

- **val** *n word1 word2 ... wordn*: Values of field components (mathematical expressions).

17.24 champ_front_fonc_txyz

Description: Boundary field which is not constant in space and in time.

See also: champ_front_base ([17.1](#))

Usage:

champ_front_fonc_txyz val

where

- **val** *n word1 word2 ... wordn*: Values of field components (mathematical expressions).

17.25 champ_front_fonc_xyz

Description: Boundary field which is not constant in space.

See also: champ_front_base ([17.1](#))

Usage:

champ_front_fonc_xyz val

where

- **val** *n word1 word2 ... wordn*: Values of field components (mathematical expressions).

17.26 champ_front_fonction

Description: boundary field that is function of another field

See also: champ_front_base ([17.1](#))

Usage:

champ_front_fonction dim inco expression

where

- **dim** *int*: Number of field components.
- **inco** *str*: Name of the field (for example: temperature).
- **expression** *str*: keyword to use a analytical expression like 10.*EXP(-0.1*val) where val be the keyword for the field.

17.27 champ_front_lu

Description: boundary field which is given from data issued from a read file. The format of this file has to be the same that the one generated by Ecrire_fichier_xyz_valeur

Example for K and epsilon quantities to be defined for inlet condition in a boundary named 'entree':

entree frontiere_ouverte_K_Eps_impose Champ_Front_lu dom 2pb_K_EPS_PERIO_1006.306198.dat

See also: champ_front_base ([17.1](#))

Usage:

champ_front_lu domaine dim file

where

- **domaine** *str*: Name of domain
- **dim** *int*: number of components
- **file** *str*: path for the read file

17.28 champ_front_normal_vef

Description: Field to define the normal vector field standard at the boundary in VEF discretization.

See also: champ_front_base (17.1)

Usage:

champ_front_normal_vef **mot** **vit_tan**

where

- **mot** *str* into [*valeur_normale*']: Name of vector field.
- **vit_tan** *float*: normal vector value (positive value for a vector oriented outside to inside).

17.29 champ_front_pression_from_u

Description: this field is used to define a pressure field depending of a velocity field.

See also: champ_front_base (17.1)

Usage:

champ_front_pression_from_u **expression**

where

- **expression** *str*: value depending of a velocity (like $2 * u_{moy}^2$).

17.30 champ_front_recyclage

Description: This keyword is used on a boundary to get a field from another boundary. New keyword since the 1.6.1 version which replaces and generalizes several obsolete ones:

Champ_front_calc_intern
Champ_front_calc_recycl_fluct_pbperio
Champ_front_calc_recycl_champ
Champ_front_calc_intern_2pbs
Champ_front_calc_recycl_fluct

It is to use, in a general way, on a boundary of a local_pb problem, a field calculated from a linear combination of an imposed field $g(x,y,z,t)$ with an instantaneous $f(x,y,z,t)$ and a spatial mean field $\langle f \rangle(t)$ or a temporal mean field $\langle f \rangle(x,y,z)$ extracted from a plane of a problem named pb (pb may be local_pb itself):

For each component i, the field F applied on the boundary will be:

$$F_i(x,y,z,t) = \alpha_i g_i(x,y,z,t) + \chi_i [f_i(x,y,z,t) - \beta_i \langle f_i \rangle]$$

Usage:

Champ_front_recyclage {

pb_champ_evaluateur *problem_name field nb_comp*
[**distance_plan** *x1 x2 (x3)*]
[**moyenne_imposee** *methode_moy* [**fichier** *file* [*second_file*]]]
[**moyenne_recyclee** *methode_recyc* [**fichier** *file* [*second_file*]]]
[**direction_anisotrope** *int*]
[**ampli_moyenne_imposee** *n x1 x2 ... xn*]
[**ampli_moyenne_recyclee** *n x1 x2 ... xn*]
[**ampli_fluctuation** *n x1 x2 ... xn*]

}

where:

- **pb_champ_evaluateur** *problem_name field nb_comp*: To give the name of the problem, the name of the field of the problem and its number of components nb_comp.
- **distance_plan** *x1 x2 (x3)*: Vector which gives the distance between the boundary and the plane from where the field F will be extracted. By default, the vector is zero, that should imply the two domains have coincident boundaries.
- **ampli_moyenne_imposee** *2|3 alpha(0) alpha(1) [alpha(2)]*: alpha_i coefficients (by default =1)
- **ampli_moyenne_recyclee** *2|3 beta(0) beta(1) [beta(2)]*: beta_i coefficients (by default =1)
- **ampli_fluctuation** *2|3 gamma(0) gamma(1) [gamma(2)]*: gamma_i coefficients (by default =1)
- **direction_anisotrope** *int into [1,2,3]*: If an integer is given for direction (X:1, Y:2, Z:3, by default, direction is negative), the imposed field g will be 0 for the 2 other directions.
- **moyenne_imposee** *methode_moy*: Value of the imposed g field. The *methode_moy* option can be:

profil *[2|3] valx(x,y,z,t) valy(x,y,z,t) [valz(x,y,z,t)]*: To specify analytic profile for the imposed g field.

interpolation_fichier *file*: To create an imposed field built by interpolation of values read from a file. The imposed field is applied on the direction given by the keyword *direction_anisotrope* (the field is zero for the other directions). The format of the file is:

```
pos(1) val(1)
pos(2) val(2)
...
pos(N) val(N)
```

If direction given by *direction_anisotrope* is 1 (or 2 or 3), then pos will be X (or Y or Z) coordinate and val will be X value (or Y value, or Z value) of the imposed field.

connexion_approchee_fichier *file*: To read the imposed field from a file where positions and values are given (it is not necessary that the coordinates of points match the coordinates of the boundary faces, indeed, the nearest point of each face of the boundary will be used). The format of the file is:

```
N
x(1) y(1) [z(1)] valx(1) valy(1) [valz(1)]
x(2) y(2) [z(2)] valx(2) valy(2) [valz(2)]
...
x(N) y(N) [z(N)] valx(N) valy(N) [valz(N)]
```

connection_exacte_fichier *file second_file*: To read the imposed field from two files. The first file contains the points coordinates (which should be the same as the coordinates of the boundary faces) and the *second_file* contains the mean values. The format of the first file is:

```
N
1 x(1) y(1) [z(1)]
2 x(2) y(2) [z(2)]
...
N x(N) y(N) [z(N)]
```

while the format of the *second_file* is:

```
N
1 valx(1) valy(1) [valz(1)]
2 valx(2) valy(2) [valz(2)]
...
N valx(N) valy(N) [valz(N)]
```

logarithmique *diametre float u_tau float visco_cin float direction int*: To specify the imposed field (in this case, velocity) by an analytical logarithmic law of the wall:

$$g(x,y,z) = u_tau * (\log(0.5*diametre*u_tau/visco_cin)/Kappa + 5.1)$$
with $g(x,y,z)=u(x,y,z)$ if **direction** is set to 1 ($g=v(x,y,z)$ if **direction** is set to 2, and $g=w(w,y,z)$ if it is set to 3)

- **moyenne_recylee** *methode_recyc*: Method used to perform a spatial or a temporal averaging of f field to specify <f>. <f> can be the surface mean of f on the plane (surface option, see below) or it can be read from several files (for example generated by the *chmoy_faceperio* option of the *Traitement_particulier* keyword to obtain a temporal mean field). The option *methode_recyc* can be:

surfacique: Surface mean for <f> from f values on the plane

Or one of the following *methode_moy* options applied to read a temporal mean field <f>(x,y,z):

interpolation

connexion_approchee

connexion_exacte

See also: *champ_front_base* (17.1)

Usage:

champ_front_recyclage **bloc**

where

- **bloc** *str*

17.31 champ_front_tabule

Description: Constant field on the boundary, tabulated as a function of time.

See also: *champ_front_base* (17.1)

Usage:

champ_front_tabule **nb_comp** **bloc**

where

- **nb_comp** *int*: Number of field components.
- **bloc** *bloc_lecture* (3.9): {nt1 t2 t3tn u1 [v1 w1 ...] u2 [v2 w2 ...] u3 [v3 w3 ...] ... un [vn wn ...]}

Values are entered into a table based on n couples (ti, ui) if nb_comp value is 1. The value of a field at a given time is calculated by linear interpolation from this table.

17.32 champ_front_tangentiel_vef

Description: Field to define the tangential velocity vector field standard at the boundary in VEF discretization.

See also: *champ_front_base* (17.1)

Usage:

champ_front_tangentiel_vef **mot** **vit_tan**

where

- **mot** *str* into ['vitesse_tangentielle']: Name of vector field.
- **vit_tan** *float*: Vector field standard [m/s].

17.33 champ_front_uniforme

Description: Boundary field which is constant in space and stationary.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_uniforme **val**

where

- **val** *n x1 x2 ... xn*: Values of field components.

17.34 champ_front_vortex

Description: `not_set`

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_vortex **dom geom nu utau**

where

- **dom** *str*: Name of domain.
- **geom** *str*
- **nu** *float*
- **utau** *float*

17.35 champ_front_xyz_debit

Description: This field is used to define a flow rate field with a velocity profil which will be normalized to match the flow rate chosen.

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_xyz_debit **obj** Lire **obj** {

 [**velocity_profil** *champ_front_base*]

flow_rate *champ_front_base*

}

where

- **velocity_profil** *champ_front_base* ([17.1](#)): `velocity_profil` 0 velocity field to define the profil of velocity.
- **flow_rate** *champ_front_base* ([17.1](#)): `flow_rate` 1 uniform field in space to define the flow rate. It could be, for example, `champ_front_uniforme`, `ch_front_input_uniform` or `champ_front_fonc_t`

17.36 champ_front_zoom

Description: Basic class for fields at boundaries of two problems (global problem and local problem).

See also: `champ_front_base` ([17.1](#))

Usage:

champ_front_zoom pbMg pb_1 pb_2 bord inco
where

- **pbMg** *str*: Name of multi-grid problem.
- **pb_1** *str*: Name of first problem.
- **pb_2** *str*: Name of second problem.
- **bord** *str*: Name of bord.
- **inco** *str*: Name of field.

18 interpolation_ibm_base

Description: Base class for all the interpolation methods available in the Immersed Boundary Method (IBM).

See also: `objet_u` ([37](#)) `ibm_element_fluide` ([18.2](#)) `ibm_aucune` ([18.1](#)) `ibm_gradient_moyen` ([18.4](#))

Usage:

interpolation_ibm_base

18.1 ibm_aucune

Synonymous: **interpolation_ibm_aucune**

Description: Immersed Boundary Method (IBM): no interpolation.

See also: `interpolation_ibm_base` ([18](#))

Usage:

ibm_aucune

18.2 ibm_element_fluide

Synonymous: **interpolation_ibm_element_fluide**

Description: Immersed Boundary Method (IBM): fluid element interpolation.

See also: `interpolation_ibm_base` ([18](#)) `ibm_hybride` ([18.3](#))

Usage:

ibm_element_fluide obj Lire obj {
 points_fluides *champ_base*
 points_solides *champ_base*
 elements_fluides *champ_base*
 correspondance_elements *champ_base*
}

where

- **points_fluides** *champ_base* (16.1): Node field giving the projection of the point below (points_solides) falling into the pure cell fluid
- **points_solides** *champ_base* (16.1): Node field giving the projection of the node on the immersed boundary
- **elements_fluides** *champ_base* (16.1): Node field giving the number of the element (cell) containing the pure fluid point
- **correspondance_elements** *champ_base* (16.1): Cell field giving the SALOME cell number

18.3 ibm_hybride

Synonymous: **interpolation_ibm_hybride**

Description: Immersed Boundary Method (IBM): hybrid (fluid/mean gradient) interpolation.

See also: **ibm_element_fluide** (18.2)

Usage:

```
ibm_hybride obj Lire obj {
    est_dirichlet champ_base
    elements_solides champ_base
    points_fluides champ_base
    points_solides champ_base
    elements_fluides champ_base
    correspondance_elements champ_base
}
```

where

- **est_dirichlet** *champ_base* (16.1): Node field of booleans indicating whether the node belong to an element where the interface is
- **elements_solides** *champ_base* (16.1): Node field giving the element number containing the solid point
- **points_fluides** *champ_base* (16.1) for inheritance: Node field giving the projection of the point below (points_solides) falling into the pure cell fluid
- **points_solides** *champ_base* (16.1) for inheritance: Node field giving the projection of the node on the immersed boundary
- **elements_fluides** *champ_base* (16.1) for inheritance: Node field giving the number of the element (cell) containing the pure fluid point
- **correspondance_elements** *champ_base* (16.1) for inheritance: Cell field giving the SALOME cell number

18.4 ibm_gradient_moyen

Synonymous: **interpolation_ibm_gradient_moyen**

Description: Immersed Boundary Method (IBM): mean gradient interpolation.

See also: **interpolation_ibm_base** (18)

Usage:

```
ibm_gradient_moyen obj Lire obj {
    points_solides champ_base
```

```

    est_dirichlet champ_base
    correspondance_elements champ_base
    elements_solides champ_base
}
where

```

- **points_solides** *champ_base* (16.1): Node field giving the projection of the node on the immersed boundary
- **est_dirichlet** *champ_base* (16.1): Node field of booleans indicating whether the node belong to an element where the interface is
- **correspondance_elements** *champ_base* (16.1): Cell field giving the SALOME cell number
- **elements_solides** *champ_base* (16.1): Node field giving the element number containing the solid point

19 loi_etat_base

Description: Basic class for state laws.

See also: objet_u (37) gaz_parfait (19.4) gaz_reel_rhot (19.1) melange_gaz_parfait (19.3) rho_T (19.5) melange_binaire (19.2)

Usage:

19.1 gaz_reel_rhot

Description: Real gas.

See also: loi_etat_base (19)

Usage:

```

gaz_reel_rhot bloc
where

```

- **bloc** *bloc_lecture* (3.9): Description.

19.2 melange_binaire

Description: Mixing of a binary mixture under the iso-thermal and iso-bar assumptions.

See also: loi_etat_base (19)

Usage:

```

melange_binaire obj Lire obj {
    molar_mass1 float
    molar_mass2 float
    mu1 float
    mu2 float
    temperature float
    diffusion_coeff float
}
where

```

- **molar_mass1** *float*: Molar mass of species 1 (in kg/mol).
- **molar_mass2** *float*: Molar mass of species 2 (in kg/mol).
- **mu1** *float*: Dynamic viscosity of species 1 (in kg/m.s).
- **mu2** *float*: Dynamic viscosity of species 2 (in kg/m.s).
- **temperature** *float*: Temperature (in Kelvin) which will be constant during the simulation since this state law only works for iso-thermal conditions.
- **diffusion_coeff** *float*: Diffusion coefficient assumed the same for both species (in m²/s).

19.3 melange_gaz_parfait

Description: Mixing of perfect gas.

See also: `loi_etat_base` ([19](#))

Usage:

melange_gaz_parfait obj Lire obj {

```

    sc float
    [ cp float ]
    prandtl float
    [ correction_fraction ]
    [ ignore_check_fraction ]
    [ dtol_fraction float ]

```

}

where

- **sc** *float*: Schmidt number of the gas $Sc = \nu/D$ (D: diffusion coefficient of the mixing).
- **cp** *float*: Specific heat at constant pressure of the gas C_p .
- **prandtl** *float*: Prandtl number of the gas $Pr = \mu * C_p / \lambda$
- **correction_fraction** : To force mass fractions between 0. and 1.
- **ignore_check_fraction** : Not to check if mass fractions between 0. and 1.
- **dtol_fraction** *float*: Delta tolerance on mass fractions for check testing (default value 1.e-6).

19.4 gaz_parfait

Description: Perfect gas.

See also: `loi_etat_base` ([19](#))

Usage:

gaz_parfait obj Lire obj {

```

    Cp float
    [ Cv float ]
    [ gamma float ]
    Prandtl float
    [ rho_constant_pour_debug champ_base ]

```

}

where

- **Cp** *float*: Specific heat at constant pressure (J/kg/K).
- **Cv** *float*: Specific heat at constant volume (J/kg/K).

- **gamma** *float*: C_p/C_v
- **Prandtl** *float*: Prandtl number of the gas $Pr=\mu*C_p/\lambda$
- **rho_constant_pour_debug** *champ_base* ([16.1](#))

19.5 rho_T

Description: Defining a state equation of form $\rho = f(T)$.

See also: [loi_etat_base](#) ([19](#))

Usage:

```
rho_T obj Lire obj {
    cp float
    [ prandtl float ]
    [ rho_xyz champ_base ]
    [ rho_t str ]
    [ rho_constant_pour_debug ]
}
```

where

- **cp** *float*: Specific heat at constant pressure of the gas C_p .
- **prandtl** *float*: Prandtl number of the gas $Pr=\mu*C_p/\lambda$
- **rho_xyz** *champ_base* ([16.1](#)): Defined with a `Champ_Fonc_xyz` to define a constant ρ with time (space dependent)
- **rho_t** *str*: Expression of T used to calculate ρ . This can lead to a variable ρ , both in space and in time.
- **rho_constant_pour_debug** : To debug use this flag.

20 loi_fermeture_base

Description: Class for appends fermeture to problem

Keyword Discretize should have already been used to read the object.

See also: [objet_u](#) ([37](#)) [loi_fermeture_test](#) ([20.1](#))

Usage:

20.1 loi_fermeture_test

Description: Loi for test only

Keyword Discretize should have already been used to read the object.

See also: [loi_fermeture_base](#) ([20](#))

Usage:

```
loi_fermeture_test obj Lire obj {
    [ coef float ]
}
```

where

- **coef** *float*: coefficient

21 loi_horaire

Description: to define the movement with a time-dependant law for the solid interface.

See also: [objet_u \(37\)](#)

Usage:

```
loi_horaire obj Lire obj {  
    position n word1 word2 ... wordn  
    vitesse n word1 word2 ... wordn  
    [ rotation n word1 word2 ... wordn ]  
    [ derivee_rotation n word1 word2 ... wordn ]  
}  
where
```

- **position** *n word1 word2 ... wordn*
- **vitesse** *n word1 word2 ... wordn*
- **rotation** *n word1 word2 ... wordn*
- **derivee_rotation** *n word1 word2 ... wordn*

22 milieu_base

Description: Basic class for medium (physics properties of medium).

See also: [objet_u \(37\)](#) [constituant \(22.2\)](#) [fluide_incompressible \(22.4\)](#) [Solide \(22.1\)](#) [fluide_diphasique \(22.3\)](#)

Usage:

```
milieu_base obj Lire obj {  
    [ rho champ_base ]  
    [ cp champ_base ]  
    [ lambda champ_base ]  
}  
where
```

- **rho** *champ_base* [\(16.1\)](#): Density (kg.m-3).
- **cp** *champ_base* [\(16.1\)](#): Specific heat (J.kg-1.K-1).
- **lambda** *champ_base* [\(16.1\)](#): Conductivity (W.m-1.K-1).

22.1 Solide

Description: Solid with cp and/or rho non-uniform.

See also: [milieu_base \(22\)](#)

Usage:

```
Solide obj Lire obj {  
    [ rho champ_base ]  
    [ cp champ_base ]  
    [ lambda champ_base ]
```

}
where

- **rho** *champ_base* (16.1) for inheritance: Density (kg.m-3).
- **cp** *champ_base* (16.1) for inheritance: Specific heat (J.kg-1.K-1).
- **lambda** *champ_base* (16.1) for inheritance: Conductivity (W.m-1.K-1).

22.2 constituent

Description: Constituent.

See also: *milieu_base* (22)

Usage:

```
constituant obj Lire obj {  
    [ coefficient_diffusion champ_base]  
    [ rho champ_base]  
    [ cp champ_base]  
    [ lambda champ_base]  
}
```

where

- **coefficient_diffusion** *champ_base* (16.1): Constituent diffusion coefficient value (m2.s-1). If a multi-constituent problem is being processed, the diffusivity will be a vectorial and each components will be the diffusion of the constituent.
- **rho** *champ_base* (16.1) for inheritance: Density (kg.m-3).
- **cp** *champ_base* (16.1) for inheritance: Specific heat (J.kg-1.K-1).
- **lambda** *champ_base* (16.1) for inheritance: Conductivity (W.m-1.K-1).

22.3 fluide_diphasique

Description: Two-phase fluid.

See also: *milieu_base* (22)

Usage:

```
fluide_diphasique obj Lire obj {  
    sigma champ_don_base  
    fluide0 str  
    fluide1 str  
    [ chaleur_latente champ_don_base]  
    [ formule_mu str]  
    [ rho champ_base]  
    [ cp champ_base]  
    [ lambda champ_base]  
}
```

where

- **sigma** *champ_don_base* (16.6): surfacic tension (J/m2)
- **fluide0** *str*: first phase fluid

- **fluide1** *str*: second phase fluid
- **chaleur_latente** *champ_don_base* (16.6): phase changement enthalpy $h(\text{phase1}_-) - h(\text{phase0}_-)$ (J/kg/K)
- **formule_mu** *str*: (into=[standard,arithmetic,harmonic]) formula used to calculate average
- **rho** *champ_base* (16.1) for inheritance: Density (kg.m-3).
- **cp** *champ_base* (16.1) for inheritance: Specific heat (J.kg-1.K-1).
- **lambda** *champ_base* (16.1) for inheritance: Conductivity (W.m-1.K-1).

22.4 fluide_incompressible

Description: This is a uncompressible fluid.

See also: milieu_base (22) fluide_quasi_compressible (22.6) fluide_ostwald (22.5)

Usage:

fluide_incompressible obj Lire obj {

```
[ beta_th  champ_base]
[ mu      champ_base]
[ beta_co  champ_base]
[ indice  champ_base]
[ kappa   champ_base]
[ rho     champ_base]
[ cp      champ_base]
[ lambda  champ_base]
```

}

where

- **beta_th** *champ_base* (16.1): Thermal expansion (K-1).
- **mu** *champ_base* (16.1): Dynamic viscosity (kg.m-1.s-1).
- **beta_co** *champ_base* (16.1): Volume expansion coefficient values in concentration.
- **indice** *champ_base* (16.1): Refractivity of fluid.
- **kappa** *champ_base* (16.1): Absorptivity of fluid (m-1).
- **rho** *champ_base* (16.1) for inheritance: Density (kg.m-3).
- **cp** *champ_base* (16.1) for inheritance: Specific heat (J.kg-1.K-1).
- **lambda** *champ_base* (16.1) for inheritance: Conductivity (W.m-1.K-1).

22.5 fluide_ostwald

Description: Non-Newtonian fluids governed by Ostwald's law. The law applicable to stress tensor is:

$\tau = K(T) \cdot (D:D/2)^{n/2}$ Where:

D refers to the deformation tensor

K refers to fluid consistency (may be a function of the temperature T)

n refers to the fluid structure index $n=1$ for a Newtonian fluid, $n<1$ for a rheofluidifier fluid, $n>1$ for a rheothickening fluid.

See also: fluide_incompressible (22.4)

Usage:

fluide_ostwald obj Lire obj {

```
[ k  champ_base]
[ n  champ_base]
```

```

[ beta_th  champ_base]
[ mu      champ_base]
[ beta_co  champ_base]
[ indice  champ_base]
[ kappa    champ_base]
[ rho     champ_base]
[ cp      champ_base]
[ lambda  champ_base]
}
where

```

- **k** champ_base (16.1): Fluid consistency.
- **n** champ_base (16.1): Fluid structure index.
- **beta_th** champ_base (16.1) for inheritance: Thermal expansion (K-1).
- **mu** champ_base (16.1) for inheritance: Dynamic viscosity (kg.m-1.s-1).
- **beta_co** champ_base (16.1) for inheritance: Volume expansion coefficient values in concentration.
- **indice** champ_base (16.1) for inheritance: Refractivity of fluid.
- **kappa** champ_base (16.1) for inheritance: Absorptivity of fluid (m-1).
- **rho** champ_base (16.1) for inheritance: Density (kg.m-3).
- **cp** champ_base (16.1) for inheritance: Specific heat (J.kg-1.K-1).
- **lambda** champ_base (16.1) for inheritance: Conductivity (W.m-1.K-1).

22.6 fluide_quasi_compressible

Description: Compressible flow at low mach number.

See also: fluide_incompressible (22.4)

Usage:

fluide_quasi_compressible obj Lire obj {

```

[ sutherland bloc_sutherland]
[ pression   float]
[ loi_etat   loi_etat_base]
[ traitement_pth str into ['edo', 'constant', 'conservation_masse']]
[ traitement_rho_gravite str into ['standard', 'moins_rho_moyen']]
[ temps_debut_prise_en_compte_drho_dt float]
[ omega_relaxation_drho_dt float]
[ mu        champ_base]
[ indice    champ_base]
[ kappa     champ_base]
[ rho      champ_base]
[ cp       champ_base]
[ lambda   champ_base]
}
where

```

- **sutherland** bloc_sutherland (22.7): Sutherland law for viscosity and for conductivity.
- **pression** float: Initial pressure.
- **loi_etat** loi_etat_base (19): State law.
- **traitement_pth** str into ['edo', 'constant', 'conservation_masse']: Particular treatment for the thermodynamic pressure Pth ; there are three possibilities:
1) with the keyword 'edo' the code computes Pth solving an O.D.E. ; in this case, the mass is not

strictly conserved (it is the default case for quasi compressible computation):

2) the keyword 'conservation_masse' forces the conservation of the mass (closed geometry or with periodic boundaries condition)

3) the keyword 'constant' makes it possible to have a constant Pth ; it's the good choice when the flow is open (e.g. with pressure boundary conditions).

It is possible to monitor the volume averaged value for temperature and density, plus Pth evolution in the .evol_glob file.

- **traitement_rho_gravite** *str into ['standard', 'moins_rho_moyen']*: It may be :1) `standard`: the gravity term is evaluated with $\rho * g$ (It is the default). 2) `moins_rho_moyen`: the gravity term is evaluated with $(\rho - \rho_{\text{moy}}) * g$. Unknown pressure is then $P^* = P + \rho_{\text{moy}} * g * z$. It is useful when you apply uniform pressure boundary condition like $P^* = 0$.
- **temps_debut_prise_en_compte_drho_dt** *float*: While $\text{time} < \text{value}$, $d\rho/dt$ is set to zero (ρ , volumic mass). Useful for some calculation during the first time steps with big variation of temperature and volumic mass.
- **omega_relaxation_drho_dt** *float*: Optional option to have a relaxed algorithm to solve the mass equation. `value` is used (1 per default) to specify ω .
- **mu** *champ_base (16.1)* for inheritance: Dynamic viscosity ($\text{kg.m}^{-1}.\text{s}^{-1}$).
- **indice** *champ_base (16.1)* for inheritance: Refractivity of fluid.
- **kappa** *champ_base (16.1)* for inheritance: Absorptivity of fluid (m^{-1}).
- **rho** *champ_base (16.1)* for inheritance: Density (kg.m^{-3}).
- **cp** *champ_base (16.1)* for inheritance: Specific heat ($\text{J.kg}^{-1}.\text{K}^{-1}$).
- **lambda** *champ_base (16.1)* for inheritance: Conductivity ($\text{W.m}^{-1}.\text{K}^{-1}$).

22.7 bloc_sutherland

Description: Sutherland law for viscosity $\mu(T) = \mu_0 * ((T_0 + C)/(T + C)) * (T/T_0)^{1.5}$ and (optional) for conductivity $\lambda(T) = \mu_0 * C_p / \text{Prandtl} * ((T_0 + S\lambda)/(T + S\lambda)) * (T/T_0)^{1.5}$

See also: [objet_lecture \(36\)](#)

Usage:

m mu0 t t0 [ms] [s] mc c

where

- **m** *str into ['mu0']*
- **mu0** *float*
- **t** *str into ['T0']*
- **t0** *float*
- **ms** *str into ['Slambda']*
- **s** *float*
- **mc** *str into ['C']*
- **c** *float*

23 milieu_v2_base

Description: Basic class for medium (physics properties of medium) composed of constituents (fluids and solids).

See also: [objet_u \(37\)](#)

Usage:

24 modele_rayonnement_base

Description: Basic class for wall thermal radiation model.

See also: objet_u (37) modele_rayonnement_milieu_transparent (24.1)

Usage:

24.1 modele_rayonnement_milieu_transparent

Description: Wall thermal radiation model for a transparent gas and resolving a radiation-conduction-thermohydraulics coupled problem in VDF or VEF.

Modele_Rayonnement_Milieu_Transparent mod

Read mod {

nom_pb_rayonnant

problem_name

fichier_fij

file_name

fichier_face_rayo

file_name

[fichier_matrice | fichier_matrice_binaire file_name]

}

nom_pb_rayonnant problem_name : problem_name is the name of the radiating fluid problem

fichier_fij file_name : file_name is the name of the file which contains the shape factor matrix between all the faces.

fichier_face_rayo file_name : file_name is the name of the file which contains the radiating faces characteristics (area, emission value ...)

fichier_matrice|fichier_matrice_binaire file_name : file_name is the name of the ASCII (or binary) file which contains the inverted shape factor matrix. It is an optional keyword, if not defined, the inverted shape factor matrix will be calculated and written in a file.

The two first files can be generated by a preprocessor, they allow the radiating face characteristics to be entered (set of faces considered to be uniform with respect to radiation for emission value, flux, etc.) and the form factors for these various faces. These files have the following format:

File on radiating faces:

N M -> N nombre de faces rayonnantes (=bords) et

(N is the number of radiating faces (=edges) and

-> M nombre de faces rayonnantes a emissivitee non nulle

M equals the number of non-zero emission radiating faces

Nom(i) S(i) E(i) -> Nom du bord i, surface du bord i, valeur de

(Name of the edge i, surface area of the edge i)

-> l'emissivite (comprise entre 0 et 1) (emission value (between 0 and 1))

Exemple:

13 4

Gauche 50.0 0.0

Droit1 50.0 0.5

Bas 10.0 0.0

Haut 10.0 0.0

Arriere 5.0 0.0

Avant 5.0 0.0

Droit2 30.0 0.5

Bas1 40.0 0.0

Haut1 20.0 0.0

Avant1 20.0 0.0

Arriere1 20.0 0.0

Entree 20.0 0.5

Sortie 20.0 0.5

File on form factors:

N -> Nombre de faces rayonnantes (Number of radiating faces)

Fij -> Matrice des facteurs de formes avec i,j entre 1 et N (Matrix of form factors where i, j between 1 and N)

Example:

13

```
1.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
0.00 0.00 0.00 0.00 0.00 0.00 0.24 0.20 0.10 0.10 0.10 0.10 0.16
0.00 0.00 1.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
0.00 0.00 0.00 1.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
0.00 0.00 0.00 0.00 1.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
0.00 0.00 0.00 0.00 0.00 1.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
0.00 0.40 0.00 0.00 0.00 0.00 0.00 0.20 0.10 0.10 0.10 0.10 0.00
0.00 0.25 0.00 0.00 0.00 0.00 0.15 0.00 0.15 0.10 0.10 0.15 0.10
0.00 0.25 0.00 0.00 0.00 0.00 0.15 0.30 0.00 0.10 0.10 0.00 0.10
0.00 0.25 0.00 0.00 0.00 0.00 0.15 0.20 0.10 0.00 0.10 0.10 0.10
0.00 0.25 0.00 0.00 0.00 0.00 0.15 0.20 0.10 0.10 0.00 0.10 0.10
0.00 0.25 0.00 0.00 0.00 0.00 0.15 0.30 0.00 0.10 0.10 0.00 0.10
0.00 0.40 0.00 0.00 0.00 0.00 0.00 0.20 0.10 0.10 0.10 0.10 0.00
```

Caution:

- a) The radiation model's precision is decided by the user when he/she names the domain edges. In fact, a radiating face is recognised by the preprocessor as the set of domain edges faces bearing the same name. Thus, if the user subdivides the edge into two edges which are named differently, he/she thus creates two radiating faces instead of one.
- b) The form factors are entered by the user, the preprocessor carries out no calculations other than checking preservation relationships on form factors.
- c) The fluid is considered to be a transparent gas.

Keyword Discretize should have already been used to read the object.

See also: `modele_rayonnement_base` (24)

Usage:

modele_rayonnement_milieu_transparent bloc

where

- **bloc** *bloc_lecture* (3.9): See description.

25 modele_turbulence_scal_base

Description: Basic class for turbulence model for energy equation.

See also: `objet_u` (37) `sous_maille_dyn` (25.3) `prandtl` (25.1) `schmidt` (25.2)

Usage:

```
modele_turbulence_scal_base obj Lire obj {  
    turbulence_paro turbulence_paro_scalaire_base  
    [ dt_impr_nusselt float ]  
}
```

where

- **turbulence_paro**i *turbulence_paro_i_scalaire_base* (34): Keyword to set the wall law.
- **dt_impr_nusselt** *float*: Keyword to print local values of Nusselt number and temperature near a wall during a turbulent calculation. The values will be printed in the `_Nusselt.face` file each `dt_impr_nusselt` time period. The local Nusselt expression is as follows : $Nu = ((\lambda + \lambda_t)/\lambda) * d_{wall}/d_{eq}$ where `d_wall` is the distance from the first mesh to the wall and `d_eq` is given by the wall law. This option also gives the value of `d_eq` and $h = (\lambda + \lambda_t)/d_{eq}$ and the fluid temperature of the first mesh near the wall.

For the Neumann boundary conditions (`flux_impose`), the «equivalent» wall temperature given by the wall law is also printed (`Tparoi equiv.`) preceded for VEF calculation by the edge temperature «T face de bord».

25.1 prandtl

Description: The Prandtl model. For the scalar equations, only the model based on Reynolds analogy is available. If `K_Epsilon` was selected in the hydraulic equation, Prandtl must be selected for the convection-diffusion temperature equation coupled to the hydraulic equation and Schmidt for the concentration equations.

See also: `modele_turbulence_scal_base` (25)

Usage:

```
prandtl obj Lire obj {
    [ prdt str]
    [ prandt_turbulent_fonction_nu_t_alpha str]
    turbulence_paroi turbulence_paro_i_scalaire_base
    [ dt_impr_nusselt float]
}
```

where

- **prdt** *str*: Keyword to modify the constant (`Prdt`) of Prandtl model : $Alphat = Nu/Prdt$ Default value is 0.9
- **prandt_turbulent_fonction_nu_t_alpha** *str*: Optional keyword to specify turbulent diffusivity (by default, $\alpha_t = \nu_t/Pr_t$) with another formulae, for example: $\alpha_t = \nu_t^2 / (0.7 * \alpha + 0.85 * \nu_t)$ with the string `nu_t*nu_t/(0,7*alpha+0,85*nu_t)` where `alpha` is the thermal diffusivity.
- **turbulence_paro**i *turbulence_paro_i_scalaire_base* (34) for inheritance: Keyword to set the wall law.
- **dt_impr_nusselt** *float* for inheritance: Keyword to print local values of Nusselt number and temperature near a wall during a turbulent calculation. The values will be printed in the `_Nusselt.face` file each `dt_impr_nusselt` time period. The local Nusselt expression is as follows : $Nu = ((\lambda + \lambda_t)/\lambda) * d_{wall}/d_{eq}$ where `d_wall` is the distance from the first mesh to the wall and `d_eq` is given by the wall law. This option also gives the value of `d_eq` and $h = (\lambda + \lambda_t)/d_{eq}$ and the fluid temperature of the first mesh near the wall.

For the Neumann boundary conditions (`flux_impose`), the «equivalent» wall temperature given by the wall law is also printed (`Tparoi equiv.`) preceded for VEF calculation by the edge temperature «T face de bord».

25.2 schmidt

Description: The Schmidt model. For the scalar equations, only the model based on Reynolds analogy is available. If `K_Epsilon` was selected in the hydraulic equation, Prandtl must be selected for the convection-diffusion temperature equation coupled to the hydraulic equation and Schmidt for the concentration equations.

See also: modele_turbulence_scal_base (25)

Usage:

```
schmidt obj Lire obj {  
    [ scturb float]  
    turbulence_paroi turbulence_paro_scalaire_base  
    [ dt_impr_nusselt float]  
}
```

where

- **scturb** float: Keyword to modify the constant (Sct) of Schmlidt model : $Dt = \text{Nut} / \text{Sct}$ Default value is 0.7.
- **turbulence_paro**i turbulence_paro_scalaire_base (34) for inheritance: Keyword to set the wall law.
- **dt_impr_nusselt** float for inheritance: Keyword to print local values of Nusselt number and temperature near a wall during a turbulent calculation. The values will be printed in the _Nusselt.face file each dt_impr_nusselt time period. The local Nusselt expression is as follows : $Nu = ((\lambda + \lambda_t) / \lambda) * d_{\text{wall}} / d_{\text{eq}}$ where d_wall is the distance from the first mesh to the wall and d_eq is given by the wall law. This option also gives the value of d_eq and $h = (\lambda + \lambda_t) / d_{\text{eq}}$ and the fluid temperature of the first mesh near the wall.
For the Neumann boundary conditions (flux_impose), the «equivalent» wall temperature given by the wall law is also printed (Tparoi equiv.) preceded for VEF calculation by the edge temperature «T face de bord».

25.3 sous_maille_dyn

Description: Dynamic sub-grid turbulence modele.

Warning : Available in VDF only. Not coded in VEF yet.

See also: modele_turbulence_scal_base (25)

Usage:

```
sous_maille_dyn obj Lire obj {  
    [ stabilise str into ['6_points', 'moy_euler', 'plans_paralleles']]  
    [ nb_points int]  
    turbulence_paroi turbulence_paro_scalaire_base  
    [ dt_impr_nusselt float]  
}
```

where

- **stabilise** str into ['6_points', 'moy_euler', 'plans_paralleles']
- **nb_points** int
- **turbulence_paro**i turbulence_paro_scalaire_base (34) for inheritance: Keyword to set the wall law.
- **dt_impr_nusselt** float for inheritance: Keyword to print local values of Nusselt number and temperature near a wall during a turbulent calculation. The values will be printed in the _Nusselt.face file each dt_impr_nusselt time period. The local Nusselt expression is as follows : $Nu = ((\lambda + \lambda_t) / \lambda) * d_{\text{wall}} / d_{\text{eq}}$ where d_wall is the distance from the first mesh to the wall and d_eq is given by the wall law. This option also gives the value of d_eq and $h = (\lambda + \lambda_t) / d_{\text{eq}}$ and the fluid temperature of the first mesh near the wall.

For the Neumann boundary conditions (flux_impose), the «equivalent» wall temperature given by the wall law is also printed (Tparoi equiv.) preceded for VEF calculation by the edge temperature «T face de bord».

26 nom

Description: Class to name the TRUST objects.

See also: objet_u (37) nom_anonyme (26.1)

Usage:

nom [**mot**]

where

- **mot** *str*: Chain of characters.

26.1 nom_anonyme

Description: not_set

See also: nom (26)

Usage:

[**mot**]

where

- **mot** *str*: Chain of characters.

27 partitionneur_deriv

Description: not_set

See also: objet_u (37) metis (27.2) sous_zones (27.5) tranche (27.6) partition (27.3) fichier_decoupage (27.1) sous_domaine (27.4) union (27.7)

Usage:

partitionneur_deriv obj Lire obj {

 [**nb_parts** *int*]

}

where

- **nb_parts** *int*: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.1 fichier_decoupage

Description: This algorithm reads an array of integer values on the disc, one value for each mesh element. Each value is interpreted as the target part number $n \geq 0$ for this element. The number of parts created is the highest value in the array plus one. Empty parts can be created if some values are not present in the array.

The file format is ASCII, and contains space, tab or carriage-return separated integer values. The first value

is the number `nb_elem` of elements in the domain, followed by `nb_elem` integer values (positive or zero). This algorithm has been designed to work together with the `'ecrire_decoupage'` option. You can generate a partition with any other algorithm, write it to disc, modify it, and read it again to generate the `.Zone` files. Contrary to other partitioning algorithms, no correction is applied by default to the partition (eg. element 0 on processor 0 and corrections for periodic boundaries). If `'corriger_partition'` is specified, these corrections are applied.

See also: `partitionneur_deriv` ([27](#))

Usage:

fichier_decoupage obj Lire obj {

```

    fichier  str
    [ corriger_partition ]
    [ nb_parts  int]

```

}

where

- **fichier** *str*: FILENAME
- **corriger_partition**
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.2 metis

Description: Metis is an external partitionning library. It is a general algorithm that will generate a partition of the domain.

See also: `partitionneur_deriv` ([27](#))

Usage:

metis obj Lire obj {

```

    [ kmetis ]
    [ use_weights ]
    [ nb_parts  int]

```

}

where

- **kmetis** : The default values are `pmetis`, default parameters are automatically chosen by Metis. `'kmetis'` is faster than `pmetis` option but the last option produces better partitioning quality. In both cases, the partitioning quality may be slightly improved by increasing the `nb_essais` option (by default `N=1`). It will compute `N` partitions and will keep the best one (smallest edge cut number). But this option is CPU expensive, taking `N=10` will multiply the CPU cost of partitioning by 10. Experiments show that only marginal improvements can be obtained with non default parameters.
- **use_weights** : If `use_weights` is specified, weighting of the element-element links in the graph is used to force metis to keep opposite periodic elements on the same processor. This option can slightly improve the partitionning quality but it consumes more memory and takes more time. It is not mandatory since a correction algorithm is always applied afterwards to ensure a correct partitionning for periodic boundaries.
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.3 partition

Synonymous: **decouper**

Description: This algorithm re-use the partition of the domain named `DOMAINE_NAME`. It is useful to partition for example a post processing domain. The partition should match with the calculation domain.

See also: `partitionneur_deriv` (27)

Usage:

```
partition obj Lire obj {  
    domaine str  
    [ nb_parts int ]  
}  
where
```

- **domaine** *str*: domain name
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.4 sous_domaine

Description: Given a global partition of a global domain, 'sous-domaine' allows to produce a conform partition of a sub-domain generated from the bigger one using the keyword `create_domain_from_sous_zone`. The sub-domain will be partitionned in a conform fashion with the global domain.

See also: `partitionneur_deriv` (27)

Usage:

```
sous_domaine obj Lire obj {  
    fichier str  
    fichier_ssz str  
    [ nb_parts int ]  
}  
where
```

- **fichier** *str*: fichier domaine
- **fichier_ssz** *str*: fichier sous zone
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.5 sous_zones

Description: This algorithm will create one part for each specified subzone/domain. All elements contained in the first subzone/domain are put in the first part, all remaining elements contained in the second subzone/domain in the second part, etc...

If all elements of the current domain are contained in the specified subzones/domain, then N parts are created, otherwise, a supplemental part is created with the remaining elements.

If no subzone is specified, all subzones defined in the domain are used to split the mesh.

See also: `partitionneur_deriv` (27)

Usage:

```
sous_zones obj Lire obj {  
    [ sous_zones  n word1 word2 ... wordn]  
    [ domaines    n word1 word2 ... wordn]  
    [ nb_parts    int]  
}  
where
```

- **sous_zones** *n word1 word2 ... wordn*: N SUBZONE_NAME_1 SUBZONE_NAME_2 ...
- **domaines** *n word1 word2 ... wordn*: N DOMAIN_NAME_1 DOMAIN_NAME_2 ...
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.6 tranche

Description: This algorithm will create a geometrical partitionning by slicing the mesh in the two or three axis directions, based on the geometric center of each mesh element. *nz* must be given if *dimension=3*. Each slice contains the same number of elements (slices don't have the same geometrical width, and for VDF meshes, slice boundaries are generally not flat except if the number of mesh elements in each direction is an exact multiple of the number of slices). First, *nx* slices in the X direction are created, then each slice is split in *ny* slices in the Y direction, and finally, each part is split in *nz* slices in the Z direction. The resulting number of parts is *nx*ny*nz*. If one particular direction has been declared periodic, the default slicing (0, 1, 2, ..., *n-1*) is replaced by (0, 1, 2, ..., *n-1*, 0), each of the two '0' slices having twice less elements than the other slices.

See also: [partitionneur_deriv \(27\)](#)

Usage:

```
tranche obj Lire obj {  
    [ tranches  n1 n2 (n3)]  
    [ nb_parts  int]  
}  
where
```

- **tranches** *n1 n2 (n3)*: Partitioned by *nx* in the X direction, *ny* in the Y direction, *nz* in the Z direction. Works only for structured meshes. No warranty for unstructured meshes.
- **nb_parts** *int* for inheritance: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

27.7 union

Description: Let several local domains be generated from a bigger one using the keyword `create_domain_from_sous_zone`, and let their partitions be generated in the usual way. Provided the list of partition files for each small domain, the keyword 'union' will partition the global domain in a conform fashion with the smaller domains.

See also: [partitionneur_deriv \(27\)](#)

Usage:

```
union liste [ nb_parts ]  
where
```

- **liste** *bloc_lecture* (3.9): List of the partition files with the following syntaxe: {sous_zone1 decoupage1 ... sous_zoneim decoupageim } where sous_zone1 ... sous_zomeim are small domains names and decoupage1 ... decoupageim are partition files.
- **nb_parts** *int*: The number of non empty parts that must be generated (generally equal to the number of processors in the parallel run).

28 precondition_base

Description: Basic class for preconditioning.

See also: objet_u (37) ssor (28.3) ssor_bloc (28.4) precondsolv (28.2) ilu (28.1)

Usage:

28.1 ilu

Description: This preconditionner can be only used with the generic GEN solver.

See also: precondition_base (28)

Usage:

```
ilu obj Lire obj {
    [ type int]
    [ filling int]
}
```

where

- **type** *int*: values can be 0|1|2|3 for null|left|right|left-and-right preconditionning (default value = 2)
- **filling** *int*: default value = 1.

28.2 precondsolv

Description: not_set

See also: precondition_base (28)

Usage:

```
precondsolv solveur
where
```

- **solveur** *solveur_sys_base* (10.17): Solver type.

28.3 ssor

Description: Symmetric successive over-relaxation algorithm.

See also: precondition_base (28)

Usage:

```
ssor obj Lire obj {
```

```

    [ omega float]
}
where

```

- **omega** *float*: Over-relaxation facteur (between 1 and 2, default value 1.6).

28.4 ssor_bloc

Description: not_set

See also: [precond_base \(28\)](#)

Usage:

```

ssor_bloc obj Lire obj {
    [ alpha_0 float]
    [ precond0 precond_base]
    [ alpha_1 float]
    [ precond1 precond_base]
    [ alpha_a float]
    [ preconda precond_base]
}
where

```

- **alpha_0** *float*
- **precond0** *precond_base* ([28](#))
- **alpha_1** *float*
- **precond1** *precond_base* ([28](#))
- **alpha_a** *float*
- **preconda** *precond_base* ([28](#))

29 schema_temps_base

Description: Basic class for time schemes. This scheme will be associated with a problem and the equations of this problem.

See also: [objet_u \(37\)](#) [scheme_euler_explicit \(29.4\)](#) [schema_predictor_corrector \(29.19\)](#) [Sch_CN_iteratif \(29.3\)](#) [runge_kutta_ordre_3 \(29.7\)](#) [runge_kutta_ordre_4_d3p \(29.8\)](#) [leap_frog \(29.5\)](#) [runge_kutta_rationnel_ordre_2 \(29.9\)](#) [schema_implicite_base \(29.17\)](#) [schema_adams_bashforth_order_2 \(29.10\)](#) [schema_adams_bashforth_order_3 \(29.11\)](#) [schema_phase_field \(29.18\)](#) [schema_euler_explicite_ALE \(29.20\)](#)

Usage:

```

schema_temps_base obj Lire obj {
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
}

```

```

[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicit int]
[ seuil_diffusion_implicit float]
[ impr_diffusion_implicit int]
[ no_error_if_not_converged_diffusion_implicit int]
[ no_conv_subiteration_diffusion_implicit int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicit int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}
where

```

- **tinit** *float*: Value of initial calculation time (0 by default).
- **tmax** *float*: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float*: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float*: Minimum calculation time step (1e-16s by default).
- **dt_max** *str*: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float*: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the **.sauv** file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the **.sauv** files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float*: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the **.out** file.
- **facsec** *float*: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example **Schema_Adams_Bashforth_order_3**.
- **seuil_statio** *float*: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int*
- **diffusion_implicit** *int*: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large **facsec** value. Start with a **facsec** value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float*: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int*: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int*

- **no_conv_subiteration_diffusion_implicit** *int*
- **dt_start** *dt_start* (10.10): *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int*: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int*: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int*: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float*: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** : To disable the check of the available amount of disk space during the calculation.
- **disable_progress** : To disable the writing of the .progress file.
- **disable_dt_ev** : To disable the writing of the .dt_ev file.
- **gnuplot_header** *int*: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.1 implicit_euler_steady_scheme

Synonymous: **schema_euler_implicit_stationnaire**

Description: This is the Implicit Euler scheme using a dual time step procedure (using local and global dt) for steady problems. Remark: the only possible solver choice for this scheme is the **implicit_steady** solver.

See also: **schema_implicit_base** (29.17)

Usage:

```
implicit_euler_steady_scheme obj Lire obj {
    [ max_iter_implicit int]
    [ steady_security_facteur float]
    [ steady_global_dt float]
    solveur solveur_implicit_base
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicit int]
    [ seuil_diffusion_implicit float]
    [ impr_diffusion_implicit int]
    [ no_error_if_not_converged_diffusion_implicit int]
    [ no_conv_subiteration_diffusion_implicit int]
    [ dt_start dt_start]
```

```

[ nb_pas_dt_max int]
[ niter_max_diffusion_implicit int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}
where

```

- **max_iter_implicit** *int*: Maximum number of iterations allowed for the solver (by default 200)
- **steady_security_facteur** *float*: Parameter used in the local time step calculation procedure in order to increase or decrease the local dt value (by default 0.5). We expect a strictly positive value
- **steady_global_dt** *float*: This is the global time step used in the dual time step algorithm (by default 100). We expect a strictly positive value
- **solveur** *solveur_implicit_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. *solveur* is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simpler (SIMPLER type algorithm) for incompressible systems, Piso (Pressure Implicit with Split Operator), and Implicit (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicit or Simple, then Piso, and at least Simpler. Because the two first give a fastest convergence (several times) than Piso and the Simpler has not been validated. It seems also than Implicit and Piso schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicit scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcputmax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every *dt_sauv*, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that *dt_sauv* is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the *facsec* to 0.5.
Warning: Some schemes needs a *facsec* lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important

gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_max$.

- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min .
 dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
 dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.2 Sch_CN_EX_iteratif

Description: This keyword also describes a Crank-Nicholson method of second order accuracy but here, for scalars, because of instabilities encountered when $dt > dt_CFL$, the Crank Nicholson scheme is not applied to scalar quantities. Scalars are treated according to Euler-Explicite scheme at the end of the CN treatment for velocity flow fields (by doing p Euler explicite under-iterations at $dt \leq dt_CFL$). Parameters are the same (but default values may change) compare to the Sch_CN_iterative scheme plus a relaxation keyword: $niter_min$ (2 by default), $niter_max$ (6 by default), $niter_avg$ (3 by default), $facsec_max$ (20 by default), $seuil$ (0.05 by default)

See also: Sch_CN_iteratif (29.3)

Usage:

Sch_CN_EX_iteratif obj Lire obj {

```
[ omega float]
[ niter_min int]
[ niter_max int]
[ niter_avg int]
[ facsec_max float]
[ seuil float]
[ tinit float]
```

```

[ tmax float]
[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicite int]
[ seuil_diffusion_implicite float]
[ impr_diffusion_implicite int]
[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}

```

where

- **omega** *float*: relaxation factor (0.1 by default)
- **niter_min** *int* for inheritance: minimal number of p-iterations to satisfy convergence criteria (2 by default)
- **niter_max** *int* for inheritance: number of maximum p-iterations allowed to satisfy convergence criteria (6 by default)
- **niter_avg** *int* for inheritance: threshold of p-iterations (3 by default). If the number of p-iterations is greater than niter_avg, facsec is reduced, if lesser than niter_avg, facsec is increased (but limited by the facsec_max value).
- **facsec_max** *float* for inheritance: maximum ratio allowed between dynamical time step returned by iterative process and stability time returned by CFL condition (2 by default).
- **seuil** *float* for inheritance: criteria for ending iterative process ($\text{Max}(\|u(p) - u(p-1)\|/\text{Max} \|u(p)\|) < \text{seuil}$) (0.001 by default)
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.

Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.

- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: $dt_{start} dt_{min}$: the first iteration is based on dt_{min} .
 $dt_{start} dt_{calc}$: the time step at first iteration is calculated in agreement with CFL condition.
 $dt_{start} dt_{fixe}$ value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
 By default, the first iteration is based on dt_{calc} .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.3 Sch_CN_iteratif

Description: The Crank-Nicholson method of second order accuracy. A mid-point rule formulation is used (Euler-centered scheme). The basic scheme is:

$$u(t+1) = u(t) + du/dt(t+1/2) * dt$$

The estimation of the time derivative du/dt at the level $(t+1/2)$ is obtained either by iterative process. The time derivative du/dt at the level $(t+1/2)$ is calculated iteratively with a simple under-relaxations method. Since the method is implicit, neither the cfl nor the fourier stability criteria must be respected. The time step is calculated in a way that the iterative procedure converges with the less iterations as possible.

Remark : for stationary or RANS calculations, no limitation can be given for time step through high value of facsec_max parameter (for instance : facsec_max 1000). In counterpart, for LES calculations, high

values of `facsec_max` may engender numerical instabilities.

See also: `schema_temps_base` (29) `Sch_CN_EX_iteratif` (29.2)

Usage:

```
Sch_CN_iteratif obj Lire obj {
    [ niter_min int]
    [ niter_max int]
    [ niter_avg int]
    [ facsec_max float]
    [ seuil float]
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicite int]
    [ seuil_diffusion_implicite float]
    [ impr_diffusion_implicite int]
    [ no_error_if_not_converged_diffusion_implicite int]
    [ no_conv_subiteration_diffusion_implicite int]
    [ dt_start dt_start]
    [ nb_pas_dt_max int]
    [ niter_max_diffusion_implicite int]
    [ precision_impr int]
    [ periode_sauvegarde_securite_en_heures float]
    [ no_check_disk_space ]
    [ disable_progress ]
    [ disable_dt_ev ]
    [ gnuplot_header int]
}
```

where

- **niter_min** *int*: minimal number of p-iterations to satisfy convergence criteria (2 by default)
- **niter_max** *int*: number of maximum p-iterations allowed to satisfy convergence criteria (6 by default)
- **niter_avg** *int*: threshold of p-iterations (3 by default). If the number of p-iterations is greater than `niter_avg`, `facsec` is reduced, if lesser than `niter_avg`, `facsec` is increased (but limited by the `facsec_max` value).
- **facsec_max** *float*: maximum ratio allowed between dynamical time step returned by iterative process and stability time returned by CFL condition (2 by default).
- **seuil** *float*: criteria for ending iterative process ($\text{Max}(\|u(p) - u(p-1)\| / \text{Max} \|u(p)\|) < \text{seuil}$) (0.001 by default)
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).

- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dGi/dt of all the unknown transported values Gi have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt = facsec * dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt = facsec * dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.4 scheme_euler_explicit

Synonymous: **schema_euler_explicite**

Description: This is the Euler explicit scheme.

See also: `schema_temps_base` (29)

Usage:

```
scheme_euler_explicit obj Lire obj {  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicite int]  
    [ seuil_diffusion_implicite float]  
    [ impr_diffusion_implicite int]  
    [ no_error_if_not_converged_diffusion_implicite int]  
    [ no_conv_subiteration_diffusion_implicite int]  
    [ dt_start dt_start]  
    [ nb_pas_dt_max int]  
    [ niter_max_diffusion_implicite int]  
    [ precision_impr int]  
    [ periode_sauvegarde_securite_en_heures float]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int]  
}
```

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every `dt_sauv`, fields are saved in the `.sauv` file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the `.sauv` files, you must specify 0. Note that `dt_sauv` is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the `.out` file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the `facsec` to 0.5.

Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema-Adams_Bashforth_order_3.

- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_{start} dt_{min} : the first iteration is based on dt_{min} .
 dt_{start} dt_{calc} : the time step at first iteration is calculated in agreement with CFL condition.
 dt_{start} dt_{fixe} value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_{calc} .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.5 leap_frog

Description: This is the leap-frog scheme.

See also: [schema_temps_base](#) (29)

Usage:

```
leap_frog obj Lire obj {
```

```
  [ tinit float]
```

```
  [ tmax float]
```

```
  [ tcpumax float]
```

```

[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicit int]
[ seuil_diffusion_implicit float]
[ impr_diffusion_implicit int]
[ no_error_if_not_converged_diffusion_implicit int]
[ no_conv_subiteration_diffusion_implicit int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicit int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}
where

```

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the **.sauv** file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the **.sauv** files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the **.out** file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example **Schema_Adams_Bashforth_order_3**.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large **facsec** value. Start with a **facsec** value of 1 and then increase it gradually

if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt = facsec * dt_max$.

- **seuil_diffusion_implicite** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicite** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicite** *int* for inheritance
- **no_conv_subiteration_diffusion_implicite** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min .
 dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
 dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicite** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.6 rk3_ft

Description: Keyword for Runge Kutta time scheme for Front_Tracking calculation.

See also: `runge_kutta_ordre_3` (29.7)

Usage:

```
rk3_ft obj Lire obj {
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicite int]
    [ seuil_diffusion_implicite float]
    [ impr_diffusion_implicite int]
    [ no_error_if_not_converged_diffusion_implicite int]
    [ no_conv_subiteration_diffusion_implicite int]
    [ dt_start dt_start]
```

```

[ nb_pas_dt_max int]
[ niter_max_diffusion_implicit int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}
where

```

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcputmax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).

- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.7 runge_kutta_ordre_3

Description: This is the Runge-Kutta scheme of third order.

See also: [schema_temps_base](#) (29) [rk3_ft](#) (29.6)

Usage:

```
runge_kutta_ordre_3 obj Lire obj {
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicit int]
    [ seuil_diffusion_implicit float]
    [ impr_diffusion_implicit int]
    [ no_error_if_not_converged_diffusion_implicit int]
    [ no_conv_subiteration_diffusion_implicit int]
    [ dt_start dt_start]
    [ nb_pas_dt_max int]
    [ niter_max_diffusion_implicit int]
    [ precision_impr int]
    [ periode_sauvegarde_securite_en_heures float]
    [ no_check_disk_space ]
    [ disable_progress ]
    [ disable_dt_ev ]
    [ gnuplot_header int]
}
```

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).

- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.8 runge_kutta_ordre_4_d3p

Description: not_set

See also: schema_temps_base (29)

Usage:

```
runge_kutta_ordre_4_d3p obj Lire obj {  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicite int]  
    [ seuil_diffusion_implicite float]  
    [ impr_diffusion_implicite int]  
    [ no_error_if_not_converged_diffusion_implicite int]  
    [ no_conv_subiteration_diffusion_implicite int]  
    [ dt_start dt_start]  
    [ nb_pas_dt_max int]  
    [ niter_max_diffusion_implicite int]  
    [ precision_impr int]  
    [ periode_sauvegarde_securite_en_heures float]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int]  
}  
where
```

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.

Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema-Adams-Bashforth_order_3.

- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt = facsec * dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large *facsec* value. Start with a *facsec* value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt = facsec * dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.9 runge_kutta_rationnel_ordre_2

Description: This is the Runge-Kutta rational scheme of second order. The method is described in the note: Wambeck - Rational Runge-Kutta methods for solving systems of ordinary differential equations, at the link: <https://link.springer.com/article/10.1007/BF02252381>. Although rational methods require more computational work than linear ones, they can have some other properties, such as a stable behaviour with explicitness, which make them preferable. The CFD application of this RRK2 scheme is described in the note: https://link.springer.com/content/pdf/10.1007%2F3-540-13917-6_112.pdf.

See also: [schema_temps_base \(29\)](#)

Usage:

```
runge_kutta_rationnel_ordre_2 obj Lire obj {
    [ tinit float]
```

```

[ tmax float]
[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicite int]
[ seuil_diffusion_implicite float]
[ impr_diffusion_implicite int]
[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}

```

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicite** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time

step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_max$.

- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10,10) for inheritance: $dt_start\ dt_min$: the first iteration is based on dt_min .
 $dt_start\ dt_calc$: the time step at first iteration is calculated in agreement with CFL condition.
 $dt_start\ dt_fixe$ value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.10 schema_adams_bashforth_order_2

Description: not_set

See also: schema_temps_base (29)

Usage:

schema_adams_bashforth_order_2 obj Lire obj {

```
[ tinit float]
[ tmax float]
[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicit int]
[ seuil_diffusion_implicit float]
[ impr_diffusion_implicit int]
[ no_error_if_not_converged_diffusion_implicit int]
[ no_conv_subiteration_diffusion_implicit int]
```



```

[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicit int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]

```

}

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcputmax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dGi/dt of all the unknown transported values Gi have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step (dt=facsec*dt_convection). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore dt=facsec*dt_max.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.

- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.11 schema_adams_bashforth_order_3

Description: not_set

See also: schema_temps_base (29)

Usage:

```
schema_adams_bashforth_order_3 obj Lire obj {
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicit int]
    [ seuil_diffusion_implicit float]
    [ impr_diffusion_implicit int]
    [ no_error_if_not_converged_diffusion_implicit int]
    [ no_conv_subiteration_diffusion_implicit int]
    [ dt_start dt_start]
    [ nb_pas_dt_max int]
    [ niter_max_diffusion_implicit int]
    [ precision_impr int]
    [ periode_sauvegarde_securite_en_heures float]
    [ no_check_disk_space ]
    [ disable_progress ]
    [ disable_dt_ev ]
    [ gnuplot_header int]
}
```

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).

- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large **facsec** value. Start with a **facsec** value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: **dt_start dt_min** : the first iteration is based on **dt_min**.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on **dt_calc**.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.12 schema_adams_moulton_order_2

Description: not_set

See also: schema_implicite_base (29.17)

Usage:

```
schema_adams_moulton_order_2 obj Lire obj {  
    [ facsec_max float]  
    [ max_iter_implicite int]  
    solveur solveur_implicite_base  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicite int]  
    [ seuil_diffusion_implicite float]  
    [ impr_diffusion_implicite int]  
    [ no_error_if_not_converged_diffusion_implicite int]  
    [ no_conv_subiteration_diffusion_implicite int]  
    [ dt_start dt_start]  
    [ nb_pas_dt_max int]  
    [ niter_max_diffusion_implicite int]  
    [ precision_impr int]  
    [ periode_sauvegarde_securite_en_heures float]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int]  
}
```

where

- **facsec_max** *float*: Maximum ratio allowed between time step and stability time returned by CFL condition. The initial ratio given by facsec keyword is changed during the calculation with the implicit scheme but it couldn't be higher than facsec_max value.

Warning: Some implicit schemes do not permit high facsec_max, example Schema_Adams_Moulton_order_3 needs facsec=facsec_max=1.

Advice:

The calculation may start with a facsec specified by the user and increased by the algorithm up to the facsec_max limit. But the user can also choose to specify a constant facsec (facsec_max will be set to facsec value then). Faster convergence has been seen and depends on the kind of calculation:

- Hydraulic only or thermal hydraulic with forced convection and low coupling between velocity and temperature (Boussinesq value beta low), facsec between 20-30
- Thermal hydraulic with forced convection and strong coupling between velocity and temperature (Boussinesq value beta high), facsec between 90-100
- Thermohydraulic with natural convection, facsec around 300
- Conduction only, facsec can be set to a very high value (1e8) as if the scheme was unconditionally

stable

These values can also be used as rule of thumb for initial facsec with a facsec_max limit higher.

- **max_iter_implicit** *int* for inheritance: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicit_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. *solveur* is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simplr (SIMPLER type algorithm) for incompressible systems, Piso (Pressure Implicit with Split Operator), and Implicite (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicite or Simple, then Piso, and at least Simplr. Because the two first give a fastest convergence (several times) than Piso and the Simplr has not been validated. It seems also than Implicite and Piso schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicite scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcputmax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every *dt_sauv*, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that *dt_sauv* is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergence criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: *dt_start* *dt_min* : the first iteration is based on *dt_min*.

dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
 dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).

By default, the first iteration is based on dt_calc.

- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.13 schema_adams_moulton_order_3

Description: not_set

See also: schema_implicit_base ([29.17](#))

Usage:

```
schema_adams_moulton_order_3 obj Lire obj {
    [ facsec_max float]
    [ max_iter_implicit int]
    solveur solveur_implicit_base
    [ tinit float]
    [ tmax float]
    [ tcpumax float]
    [ dt_min float]
    [ dt_max str]
    [ dt_sauv float]
    [ dt_impr float]
    [ facsec float]
    [ seuil_statio float]
    [ seuil_statio_relatif_deconseille int]
    [ diffusion_implicit int]
    [ seuil_diffusion_implicit float]
    [ impr_diffusion_implicit int]
    [ no_error_if_not_converged_diffusion_implicit int]
    [ no_conv_subiteration_diffusion_implicit int]
    [ dt_start dt_start]
    [ nb_pas_dt_max int]
    [ niter_max_diffusion_implicit int]
    [ precision_impr int]
    [ periode_sauvegarde_securite_en_heures float]
    [ no_check_disk_space ]
    [ disable_progress ]
}
```

```
[ disable_dt_ev ]
[ gnuplot_header int ]
}
```

where

- **facsec_max** *float*: Maximum ratio allowed between time step and stability time returned by CFL condition. The initial ratio given by **facsec** keyword is changed during the calculation with the implicit scheme but it couldn't be higher than **facsec_max** value.

Warning: Some implicit schemes do not permit high **facsec_max**, example **Schema_Adams_Moulton_order_3** needs **facsec=facsec_max=1**.

Advice:

The calculation may start with a **facsec** specified by the user and increased by the algorithm up to the **facsec_max** limit. But the user can also choose to specify a constant **facsec** (**facsec_max** will be set to **facsec** value then). Faster convergence has been seen and depends on the kind of calculation:

- Hydraulic only or thermal hydraulic with forced convection and low coupling between velocity and temperature (Boussinesq value beta low), **facsec** between 20-30
- Thermal hydraulic with forced convection and strong coupling between velocity and temperature (Boussinesq value beta high), **facsec** between 90-100
- Thermohydraulic with natural convection, **facsec** around 300
- Conduction only, **facsec** can be set to a very high value (1e8) as if the scheme was unconditionally stable

These values can also be used as rule of thumb for initial **facsec** with a **facsec_max** limit higher.

- **max_iter_implicit** *int* for inheritance: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicit_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. **solveur** is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simpler (SIMPLER type algorithm) for incompressible systems, Piso (Pressure Implicit with Split Operator), and Implicite (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicite or Simple, then Piso, and at least Simpler. Because the two first give a fastest convergence (several times) than Piso and the Simpler has not been validated. It seems also than Implicite and Piso schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicite scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the **.sauv** file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the **.sauv** files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the **.out** file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example **Schema_Adams_Bashforth_order_3**.

- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt = facsec * dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large *facsec* value. Start with a *facsec* value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt = facsec * dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.14 schema_backward_differentiation_order_2

Description: not_set

See also: [schema_implicit_base](#) (29.17)

Usage:

schema_backward_differentiation_order_2 obj Lire obj {

```
[ facsec_max float]
[ max_iter_implicit int]
solveur solveur_implicit_base
[ tinit float]
[ tmax float]
```



```

[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicite int]
[ seuil_diffusion_implicite float]
[ impr_diffusion_implicite int]
[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}

```

where

- **facsec_max** *float*: Maximum ratio allowed between time step and stability time returned by CFL condition. The initial ratio given by **facsec** keyword is changed during the calculation with the implicit scheme but it couldn't be higher than **facsec_max** value.

Warning: Some implicit schemes do not permit high **facsec_max**, example **Schema_Adams_Moulton_order_3** needs **facsec=facsec_max=1**.

Advice:

The calculation may start with a **facsec** specified by the user and increased by the algorithm up to the **facsec_max** limit. But the user can also choose to specify a constant **facsec** (**facsec_max** will be set to **facsec** value then). Faster convergence has been seen and depends on the kind of calculation:

- Hydraulic only or thermal hydraulic with forced convection and low coupling between velocity and temperature (Boussinesq value beta low), **facsec** between 20-30
- Thermal hydraulic with forced convection and strong coupling between velocity and temperature (Boussinesq value beta high), **facsec** between 90-100
- Thermohydraulic with natural convection, **facsec** around 300
- Conduction only, **facsec** can be set to a very high value (1e8) as if the scheme was unconditionally stable

These values can also be used as rule of thumb for initial **facsec** with a **facsec_max** limit higher.

- **max_iter_implicite** *int* for inheritance: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicite_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. **solveur** is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are **Simple** (**SIMPLE** type algorithm), **Simpler** (**SIMPLER** type algorithm) for incompressible systems, **Piso** (**Pressure Implicit with Split Operator**), and **Implicite** (similar to **PISO**, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.

Advice: Since the 1.6.0 version, we recommend to use first the **Implicite** or **Simple**, then **Piso**, and at least **Simpler**. Because the two first give a fastest convergence (several times) than **Piso** and the **Simpler** has not been validated. It seems also than **Implicite** and **Piso** schemes give better results than

the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicite scheme.

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcputmax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicite** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicite** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicite** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicite** *int* for inheritance
- **no_conv_subiteration_diffusion_implicite** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicite** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.

- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.15 schema_backward_differentiation_order_3

Description: not_set

See also: schema_implicite_base ([29.17](#))

Usage:

schema_backward_differentiation_order_3 obj Lire obj {

```
[ facsec_max float]
[ max_iter_implicite int]
solveur solveur_implicite_base
[ tinit float]
[ tmax float]
[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
[ diffusion_implicite int]
[ seuil_diffusion_implicite float]
[ impr_diffusion_implicite int]
[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
```

}

where

- **facsec_max** *float*: Maximum ratio allowed between time step and stability time returned by CFL condition. The initial ratio given by facsec keyword is changed during the calculation with the implicit scheme but it couldn't be higher than facsec_max value.

Warning: Some implicit schemes do not permit high facsec_max, example Schema_Adams_Moulton_order_3 needs facsec=facsec_max=1.

Advice:

The calculation may start with a facsec specified by the user and increased by the algorithm up to the facsec_max limit. But the user can also choose to specify a constant facsec (facsec_max will be set to facsec value then). Faster convergence has been seen and depends on the kind of calculation:

- Hydraulic only or thermal hydraulic with forced convection and low coupling between velocity and temperature (Boussinesq value beta low), facsec between 20-30
- Thermal hydraulic with forced convection and strong coupling between velocity and temperature (Boussinesq value beta high), facsec between 90-100
- Thermohydraulic with natural convection, facsec around 300
- Conduction only, facsec can be set to a very high value (1e8) as if the scheme was unconditionally stable

These values can also be used as rule of thumb for initial facsec with a facsec_max limit higher.

- **max_iter_implicit** *int* for inheritance: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicit_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. *solveur* is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simpler (SIMPLER type algorithm) for incompressible systems, PISO (Pressure Implicit with Split Operator), and Implicit (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicit or Simple, then PISO, and at least Simpler. Because the two first give a fastest convergence (several times) than PISO and the Simpler has not been validated. It seems also than Implicit and PISO schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to PISO or Implicit scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every *dt_sauv*, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that *dt_sauv* is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of

convergency criteria for the resolution by conjugate gradient used for implicit diffusion.

- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.16 scheme_euler_implicit

Synonymous: **schema_euler_implicit**

Description: This is the Euler implicit scheme.

See also: **schema_implicit_base** (29.17)

Usage:

```
scheme_euler_implicit obj Lire obj {  
    [ facsec_max float]  
    [ thermique_monolithique int]  
    [ max_iter_implicit int]  
    solveur solveur_implicit_base  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicit int]  
    [ seuil_diffusion_implicit float]  
    [ impr_diffusion_implicit int]
```

```

[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}
where

```

- **facsec_max** *float*: 1 Maximum ratio allowed between time step and stability time returned by CFL condition. The initial ratio given by facsec keyword is changed during the calculation with the implicit scheme but it couldn't be higher than facsec_max value.

Warning: Some implicit schemes do not permit high facsec_max, example Schema_Adams_Moulton_order_3 needs facsec=facsec_max=1.

Advice:

The calculation may start with a facsec specified by the user and increased by the algorithm up to the facsec_max limit. But the user can also choose to specify a constant facsec (facsec_max will be set to facsec value then). Faster convergence has been seen and depends on the kind of calculation:

- Hydraulic only or thermal hydraulic with forced convection and low coupling between velocity and temperature (Boussinesq value beta low), facsec between 20-30
- Thermal hydraulic with forced convection and strong coupling between velocity and temperature (Boussinesq value beta high), facsec between 90-100
- Thermohydraulic with natural convection, facsec around 300
- Conduction only, facsec can be set to a very high value (1e8) as if the scheme was unconditionally stable

These values can also be used as rule of thumb for initial facsec with a facsec_max limit higher.

- **thermique_monolithique** *int*: Activate monolithic thermal coupling of equations for coupled problems. 0 = no, 1 = yes, 2 = yes and test convergence
- **max_iter_implicite** *int* for inheritance: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicite_base* (30) for inheritance: This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. solveur is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simpler (SIMPLER type algorithm) for incompressible systems, Piso (Pressure Implicit with Split Operator), and Implicite (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicite or Simple, then Piso, and at least Simpler. Because the two first give a fastest convergence (several times) than Piso and the Simpler has not been validated. It seems also than Implicite and Piso schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicite scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).

- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.17 schema_implicite_base

Description: Basic class for implicite time scheme.

See also: [schema_temps_base \(29\)](#) [schema_adams_moulton_order_2 \(29.12\)](#) [schema_adams_moulton_order_3 \(29.13\)](#) [schema_backward_differentiation_order_2 \(29.14\)](#) [schema_backward_differentiation_order_3 \(29.15\)](#) [scheme_euler_implicit \(29.16\)](#) [implicit_euler_steady_scheme \(29.1\)](#)

Usage:

```
schema_implicite_base obj Lire obj {  
    [ max_iter_implicite int]  
    solveur solveur_implicite_base  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicite int]  
    [ seuil_diffusion_implicite float]  
    [ impr_diffusion_implicite int]  
    [ no_error_if_not_converged_diffusion_implicite int]  
    [ no_conv_subiteration_diffusion_implicite int]  
    [ dt_start dt_start]  
    [ nb_pas_dt_max int]  
    [ niter_max_diffusion_implicite int]  
    [ precision_impr int]  
    [ periode_sauvegarde_securite_en_heures float]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int]  
}
```

where

- **max_iter_implicite** *int*: Maximum number of iterations allowed for the solver (by default 200).
- **solveur** *solveur_implicite_base* (30): This keyword is used to designate the solver selected in the situation where the time scheme is an implicit scheme. *solver* is the name of the solver that allows equation diffusion and convection operators to be set as implicit terms. Keywords corresponding to this functionality are Simple (SIMPLE type algorithm), Simpler (SIMPLER type algorithm) for incompressible systems, Piso (Pressure Implicit with Split Operator), and Implicite (similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.
Advice: Since the 1.6.0 version, we recommend to use first the Implicite or Simple, then Piso, and at least Simpler. Because the two first give a fastest convergence (several times) than Piso and the Simpler has not been validated. It seems also than Implicite and Piso schemes give better results than the Simple scheme when the flow is not fully stationary. Thus, if the solution obtained with Simple is not stationary, it is recommended to switch to Piso or Implicite scheme.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).

- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt Impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: dt_start dt_min : the first iteration is based on dt_min.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_calc.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision Impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows

to use the column title instead of columns number.

29.18 schema_phase_field

Description: Keyword for the only available Scheme for time discretization of the Phase Field problem.

See also: `schema_temps_base` (29)

Usage:

```
schema_phase_field obj Lire obj {  
    [ schema_ch schema_temps_base ]  
    [ schema_ns schema_temps_base ]  
    [ tinit float ]  
    [ tmax float ]  
    [ tcpumax float ]  
    [ dt_min float ]  
    [ dt_max str ]  
    [ dt_sauv float ]  
    [ dt_impr float ]  
    [ facsec float ]  
    [ seuil_statio float ]  
    [ seuil_statio_relatif_deconseille int ]  
    [ diffusion_implicite int ]  
    [ seuil_diffusion_implicite float ]  
    [ impr_diffusion_implicite int ]  
    [ no_error_if_not_converged_diffusion_implicite int ]  
    [ no_conv_subiteration_diffusion_implicite int ]  
    [ dt_start dt_start ]  
    [ nb_pas_dt_max int ]  
    [ niter_max_diffusion_implicite int ]  
    [ precision_impr int ]  
    [ periode_sauvegarde_securite_en_heures float ]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int ]  
}
```

where

- **schema_ch** *schema_temps_base* (29): Time scheme for the Cahn-Hilliard equation.
- **schema_ns** *schema_temps_base* (29): Time scheme for the Navier-Stokes equation.
- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every `dt_sauv`, fields are saved in the `.sauv` file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the `.sauv` files, you must specify 0. Note that `dt_sauv` is in terms of physical time (not cpu time).

- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt = facsec * dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large facsec value. Start with a facsec value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt = facsec * dt_{max}$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: $dt_{start} dt_{min}$: the first iteration is based on dt_{min} .
 $dt_{start} dt_{calc}$: the time step at first iteration is calculated in agreement with CFL condition.
 $dt_{start} dt_{fixe}$ value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on dt_{calc} .
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.19 schema_predictor_corrector

Description: This is the predictor-corrector scheme (second order). It is more accurate and economic than MacCormack scheme. It gives best results with a second ordre convective scheme like quick, centre (VDF).

See also: [schema_temps_base](#) (29)

Usage:

```
schema_predictor_corrector obj Lire obj {  
    [ tinit float]  
    [ tmax float]  
    [ tcpumax float]  
    [ dt_min float]  
    [ dt_max str]  
    [ dt_sauv float]  
    [ dt_impr float]  
    [ facsec float]  
    [ seuil_statio float]  
    [ seuil_statio_relatif_deconseille int]  
    [ diffusion_implicite int]  
    [ seuil_diffusion_implicite float]  
    [ impr_diffusion_implicite int]  
    [ no_error_if_not_converged_diffusion_implicite int]  
    [ no_conv_subiteration_diffusion_implicite int]  
    [ dt_start dt_start]  
    [ nb_pas_dt_max int]  
    [ niter_max_diffusion_implicite int]  
    [ precision_impr int]  
    [ periode_sauvegarde_securite_en_heures float]  
    [ no_check_disk_space ]  
    [ disable_progress ]  
    [ disable_dt_ev ]  
    [ gnuplot_header int]  
}  
where
```

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every dt_sauv, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that dt_sauv is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the facsec to 0.5.
Warning: Some schemes needs a facsec lower than 1 (0.5 is a good start), for example Schema-Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dGi/dt of all the unknown transported values Gi have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance

- **diffusion_implicit** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_convection$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large *facsec* value. Start with a *facsec* value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_max$.
- **seuil_diffusion_implicit** *float* for inheritance: This keyword changes the default value ($1e-6$) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicit** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicit** *int* for inheritance
- **no_conv_subiteration_diffusion_implicit** *int* for inheritance
- **dt_start** *dt_start* (10.10) for inheritance: *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps ($1e9$ by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision_impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

29.20 schema_euler_explicite_ALE

Description: This is the Euler explicit scheme used for ALE problems.

See also: [schema_temps_base](#) (29)

Usage:

schema_euler_explicite_ALE obj Lire obj {

```
[ tinit float]
[ tmax float]
[ tcpumax float]
[ dt_min float]
[ dt_max str]
[ dt_sauv float]
[ dt_impr float]
[ facsec float]
[ seuil_statio float]
[ seuil_statio_relatif_deconseille int]
```

```

[ diffusion_implicite int]
[ seuil_diffusion_implicite float]
[ impr_diffusion_implicite int]
[ no_error_if_not_converged_diffusion_implicite int]
[ no_conv_subiteration_diffusion_implicite int]
[ dt_start dt_start]
[ nb_pas_dt_max int]
[ niter_max_diffusion_implicite int]
[ precision_impr int]
[ periode_sauvegarde_securite_en_heures float]
[ no_check_disk_space ]
[ disable_progress ]
[ disable_dt_ev ]
[ gnuplot_header int]
}

```

where

- **tinit** *float* for inheritance: Value of initial calculation time (0 by default).
- **tmax** *float* for inheritance: Time during which the calculation will be stopped (1e30s by default).
- **tcpumax** *float* for inheritance: CPU time limit (must be specified in hours) for which the calculation is stopped (1e30s by default).
- **dt_min** *float* for inheritance: Minimum calculation time step (1e-16s by default).
- **dt_max** *str* for inheritance: Maximum calculation time step as function of time (1e30s by default).
- **dt_sauv** *float* for inheritance: Save time step value (1e30s by default). Every **dt_sauv**, fields are saved in the .sauv file. The file contains all the information saved over time. If this instruction is not entered, results are saved only upon calculation completion. To disable the writing of the .sauv files, you must specify 0. Note that **dt_sauv** is in terms of physical time (not cpu time).
- **dt_impr** *float* for inheritance: Scheme parameter printing time step in time (1e30s by default). The time steps and the flux balances are printed (incorporated onto every side of processed domains) into the .out file.
- **facsec** *float* for inheritance: Value assigned to the safety factor for the time step (1. by default). The time step calculated is multiplied by the safety factor. The first thing to try when a calculation does not converge with an explicit time scheme is to reduce the **facsec** to 0.5.
Warning: Some schemes needs a **facsec** lower than 1 (0.5 is a good start), for example Schema_Adams_Bashforth_order_3.
- **seuil_statio** *float* for inheritance: Value of the convergence threshold (1e-12 by default). Problems using this type of time scheme converge when the derivatives dG_i/dt of all the unknown transported values G_i have a combined absolute value less than this value. This is the keyword used to set the permanent rating threshold.
- **seuil_statio_relatif_deconseille** *int* for inheritance
- **diffusion_implicite** *int* for inheritance: Keyword to make the diffusive term in the Navier-Stokes equations implicit (in this case, it should be set to 1). The stability time step is then only based on the convection time step ($dt=facsec*dt_{convection}$). Thus, in some circumstances, an important gain is achieved with respect to the time step (large diffusion with respect to convection on tightened meshes). Caution: It is however recommended that the user avoids exceeding the convection time step by selecting a too large **facsec** value. Start with a **facsec** value of 1 and then increase it gradually if you wish to accelerate calculation. In addition, for a natural convection calculation with a zero initial velocity, in the first time step, the convection time is infinite and therefore $dt=facsec*dt_{max}$.
- **seuil_diffusion_implicite** *float* for inheritance: This keyword changes the default value (1e-6) of convergency criteria for the resolution by conjugate gradient used for implicit diffusion.
- **impr_diffusion_implicite** *int* for inheritance: Unactivate (default) or not the printing of the convergence during the resolution of the conjugate gradient.
- **no_error_if_not_converged_diffusion_implicite** *int* for inheritance
- **no_conv_subiteration_diffusion_implicite** *int* for inheritance

- **dt_start** *dt_start* (10.10) for inheritance: *dt_start dt_min* : the first iteration is based on *dt_min*.
dt_start dt_calc : the time step at first iteration is calculated in agreement with CFL condition.
dt_start dt_fixe value : the first time step is fixed by the user (recommended when resuming calculation with Crank Nicholson temporal scheme to ensure continuity).
By default, the first iteration is based on *dt_calc*.
- **nb_pas_dt_max** *int* for inheritance: Maximum number of calculation time steps (1e9 by default).
- **niter_max_diffusion_implicit** *int* for inheritance: This keyword changes the default value (number of unknowns) of the maximal iterations number in the conjugate gradient method used for implicit diffusion.
- **precision Impr** *int* for inheritance: Optional keyword to define the digit number for flux values printed into .out files (by default 3).
- **periode_sauvegarde_securite_en_heures** *float* for inheritance: To change the default period (23 hours) between the save of the fields in .sauv file.
- **no_check_disk_space** for inheritance: To disable the check of the available amount of disk space during the calculation.
- **disable_progress** for inheritance: To disable the writing of the .progress file.
- **disable_dt_ev** for inheritance: To disable the writing of the .dt_ev file.
- **gnuplot_header** *int* for inheritance: Optional keyword to modify the header of the .out files. Allows to use the column title instead of columns number.

30 solveur_implicit_base

Description: Class for solver in the situation where the time scheme is the implicit scheme. Solver allows equation diffusion and convection operators to be set as implicit terms.

See also: *objet_u* (37) *solveur_lineaire_std* (30.7) *simpler* (30.6)

Usage:

30.1 implicit_steady

Description: this is the implicit solver using a dual time step. Remark: this solver can be used only with the *Implicit_Euler_Steady_Scheme* time scheme.

See also: *implicit* (30.2)

Usage:

```
implicit_steady obj Lire obj {
    [ seuil_convergence_implicit float]
    [ nb_corrections_max int]
    [ seuil_convergence_solveur float]
    [ seuil_generation_solveur float]
    [ seuil_verification_solveur float]
    [ seuil_test_preliminaire_solveur float]
    [ solveur solveur_sys_base]
    [ no_qdm ]
    [ nb_it_max int]
    [ controle_residu ]
}
```

where

- **seuil_convergence_implicit** *float* for inheritance: Convergence criteria.

- **nb_corrections_max** *int* for inheritance: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than nb_corrections_max if the accuracy of the projection is sufficient. (By default nb_corrections_max is set to 21).
- **seuil_convergence_solveur** *float* for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value MUST be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** *float* for inheritance: Option to create a GMRES solver and use vrel as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than vrel).
- **seuil_verification_solveur** *float* for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than vrel after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** *float* for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than vrel.
- **solveur** *solveur_sys_base* (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

30.2 implicite

Description: similar to PISO, but as it looks like a simplified solver, it will use fewer timesteps. But it may run faster because the pressure matrix is not re-assembled and thus provides CPU gains.

See also: piso (30.4) implicit_steady (30.1) implicite_ALE (30.3)

Usage:

```
implicite obj Lire obj {
    [ seuil_convergence_implicite float]
    [ nb_corrections_max int]
    [ seuil_convergence_solveur float]
    [ seuil_generation_solveur float]
    [ seuil_verification_solveur float]
    [ seuil_test_preliminaire_solveur float]
    [ solveur solveur_sys_base]
    [ no_qdm ]
    [ nb_it_max int]
    [ controle_residu ]
}
```

where

- **seuil_convergence_implicite** *float* for inheritance: Convergence criteria.
- **nb_corrections_max** *int* for inheritance: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than nb_corrections_max if the accuracy of the projection is sufficient. (By default nb_corrections_max is set to 21).
- **seuil_convergence_solveur** *float* for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the

scalar equations if any. This value **MUST** be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).

- **seuil_generation_solveur** *float* for inheritance: Option to create a GMRES solver and use *vrel* as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than *vrel*).
- **seuil_verification_solveur** *float* for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than *vrel* after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** *float* for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than *vrel*.
- **solveur** *solveur_sys_base* (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the *residu* suddenly increases.

30.3 implicite_ALE

Description: Implicite solver used for ALE problem

See also: *implicite* (30.2)

Usage:

```

implicite_ALE obj Lire obj {
    [ seuil_convergence_implicite float ]
    [ nb_corrections_max int ]
    [ seuil_convergence_solveur float ]
    [ seuil_generation_solveur float ]
    [ seuil_verification_solveur float ]
    [ seuil_test_preliminaire_solveur float ]
    [ solveur solveur_sys_base ]
    [ no_qdm ]
    [ nb_it_max int ]
    [ controle_residu ]
}

```

where

- **seuil_convergence_implicite** *float* for inheritance: Convergence criteria.
- **nb_corrections_max** *int* for inheritance: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than *nb_corrections_max* if the accuracy of the projection is sufficient. (By default *nb_corrections_max* is set to 21).
- **seuil_convergence_solveur** *float* for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value **MUST** be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** *float* for inheritance: Option to create a GMRES solver and use *vrel* as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than *vrel*).
- **seuil_verification_solveur** *float* for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than *vrel* after the implicit linear system $Ax=B$ has been solved.

- **seuil_test_preliminaire_solveur** *float* for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than *vrel*.
- **solveur** *solveur_sys_base* (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

30.4 piso

Description: Piso (Pressure Implicit with Split Operator) - method to solve N_S.

See also: [simpler \(30.6\)](#) [implicite \(30.2\)](#) [simple \(30.5\)](#)

Usage:

```
piso obj Lire obj {
    [ seuil_convergence_implicite float]
    [ nb_corrections_max int]
    [ seuil_convergence_solveur float]
    [ seuil_generation_solveur float]
    [ seuil_verification_solveur float]
    [ seuil_test_preliminaire_solveur float]
    [ solveur solveur_sys_base]
    [ no_qdm ]
    [ nb_it_max int]
    [ controle_residu ]
}
```

where

- **seuil_convergence_implicite** *float*: Convergence criteria.
- **nb_corrections_max** *int*: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than *nb_corrections_max* if the accuracy of the projection is sufficient. (By default *nb_corrections_max* is set to 21).
- **seuil_convergence_solveur** *float* for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value **MUST** be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** *float* for inheritance: Option to create a GMRES solver and use *vrel* as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than *vrel*).
- **seuil_verification_solveur** *float* for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than *vrel* after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** *float* for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than *vrel*.
- **solveur** *solveur_sys_base* (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gmres.

- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

30.5 simple

Description: SIMPLE type algorithm

See also: piso (30.4) solveur_u_p (30.8)

Usage:

```
simple obj Lire obj {
    [ relax_pression float]
    [ seuil_convergence_implicit float]
    [ nb_corrections_max int]
    [ seuil_convergence_solveur float]
    [ seuil_generation_solveur float]
    [ seuil_verification_solveur float]
    [ seuil_test_preliminaire_solveur float]
    [ solveur solveur_sys_base]
    [ no_qdm ]
    [ nb_it_max int]
    [ controle_residu ]
}
```

where

- **relax_pression** float: Value between 0 and 1 (by default 1), this keyword is used only by the SIMPLE algorithm for relaxing the increment of pressure.
- **seuil_convergence_implicit** float for inheritance: Convergence criteria.
- **nb_corrections_max** int for inheritance: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than nb_corrections_max if the accuracy of the projection is sufficient. (By default nb_corrections_max is set to 21).
- **seuil_convergence_solveur** float for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value MUST be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** float for inheritance: Option to create a GMRES solver and use vrel as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than vrel).
- **seuil_verification_solveur** float for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than vrel after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** float for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than vrel.
- **solveur** solveur_sys_base (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** int for inheritance: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

30.6 **simpler**

Description: Simpler method for incompressible systems.

See also: `solveur_implicite_base` (30) `piso` (30.4)

Usage:

```
simpler obj Lire obj {  
    seuil_convergence_implicite float  
    [ seuil_convergence_solveur float]  
    [ seuil_generation_solveur float]  
    [ seuil_verification_solveur float]  
    [ seuil_test_preliminaire_solveur float]  
    [ solveur solveur_sys_base]  
    [ no_qdm ]  
    [ nb_it_max int]  
    [ controle_residu ]  
}
```

where

- **seuil_convergence_implicite** *float*: Keyword to set the value of the convergence criteria for the resolution of the implicit system build to solve either the Navier_Stokes equation (only for Simple and Simpler algorithms) or a scalar equation. It is advised to use the default value (1e6) to solve the implicit system only once by time step. This value must be decreased when a coupling between problems is considered.
- **seuil_convergence_solveur** *float*: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value MUST be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** *float*: Option to create a GMRES solver and use *vrel* as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than *vrel*).
- **seuil_verification_solveur** *float*: Option to check if residual error $\|Ax-B\|$ is lesser than *vrel* after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** *float*: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than *vrel*.
- **solveur** *solveur_sys_base* (10.17): Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** : Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int*: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** : Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

30.7 **solveur_lineaire_std**

Description: `not_set`

See also: `solveur_implicite_base` (30)

Usage:

```
solveur_lineaire_std obj Lire obj {  
    [ solveur solveur_sys_base]
```

```
}  
where
```

- **solveur** *solveur_sys_base* (10.17)

30.8 solveur_u_p

Description: similar to simple.

See also: simple (30.5)

Usage:

```
solveur_u_p obj Lire obj {  
    [ relax_pression float ]  
    [ seuil_convergence_implicit float ]  
    [ nb_corrections_max int ]  
    [ seuil_convergence_solveur float ]  
    [ seuil_generation_solveur float ]  
    [ seuil_verification_solveur float ]  
    [ seuil_test_preliminaire_solveur float ]  
    [ solveur solveur_sys_base ]  
    [ no_qdm ]  
    [ nb_it_max int ]  
    [ controle_residu ]  
}
```

where

- **relax_pression** *float* for inheritance: Value between 0 and 1 (by default 1), this keyword is used only by the SIMPLE algorithm for relaxing the increment of pressure.
- **seuil_convergence_implicit** *float* for inheritance: Convergence criteria.
- **nb_corrections_max** *int* for inheritance: Maximum number of corrections performed by the PISO algorithm to achieve the projection of the velocity field. The algorithm may perform less corrections than **nb_corrections_max** if the accuracy of the projection is sufficient. (By default **nb_corrections_max** is set to 21).
- **seuil_convergence_solveur** *float* for inheritance: value of the convergence criteria for the resolution of the implicit system build by solving several times per time step the Navier_Stokes equation and the scalar equations if any. This value **MUST** be used when a coupling between problems is considered (should be set to a value typically of 0.1 or 0.01).
- **seuil_generation_solveur** *float* for inheritance: Option to create a GMRES solver and use **vrel** as the convergence threshold (implicit linear system $Ax=B$ will be solved if residual error $\|Ax-B\|$ is lesser than **vrel**).
- **seuil_verification_solveur** *float* for inheritance: Option to check if residual error $\|Ax-B\|$ is lesser than **vrel** after the implicit linear system $Ax=B$ has been solved.
- **seuil_test_preliminaire_solveur** *float* for inheritance: Option to decide if the implicit linear system $Ax=B$ should be solved by checking if the residual error $\|Ax-B\|$ is bigger than **vrel**.
- **solveur** *solveur_sys_base* (10.17) for inheritance: Method (different from the default one, Gmres with diagonal preconditioning) to solve the linear system.
- **no_qdm** for inheritance: Keyword to not solve qdm equation (and turbulence models of these equation).
- **nb_it_max** *int* for inheritance: Keyword to set the maximum iterations number for the Gmres.
- **controle_residu** for inheritance: Keyword of Boolean type (by default 0). If set to 1, the convergence occurs if the residu suddenly increases.

31 source_base

Description: Basic class of source terms introduced in the equation.

See also: [objet_u \(37\)](#) [source_generique \(31.26\)](#) [boussinesq_temperature \(31.6\)](#) [boussinesq_concentration \(31.5\)](#) [dirac \(31.10\)](#) [puissance_thermique \(31.19\)](#) [source_qdm_lambdaup \(31.32\)](#) [source_th_tdivu \(31.38\)](#) [source_robin \(31.35\)](#) [source_robin_scalaire \(31.36\)](#) [canal_perio \(31.7\)](#) [source_constituant \(31.24\)](#) [radioactive_decay \(31.20\)](#) [acceleration \(31.4\)](#) [coriolis \(31.8\)](#) [source_qdm \(31.31\)](#) [perte_charge_singuliere \(31.18\)](#) [DP_Impose \(31.1\)](#) [terme_puissance_thermique_echange_impose \(31.44\)](#) [perte_charge_directionnelle \(31.14\)](#) [perte_charge_isotrope \(31.15\)](#) [perte_charge_anisotrope \(31.12\)](#) [perte_charge_circulaire \(31.13\)](#) [darcy \(31.9\)](#) [forchheimer \(31.11\)](#) [perte_charge_reguliere \(31.16\)](#) [source_pdf_base \(31.30\)](#) [source_transport_k_eps \(31.40\)](#) [trainee \(31.39\)](#) [flottabilite \(31.25\)](#) [masse_ajoutee \(31.27\)](#) [Source_Constituant_Vortex \(31.2\)](#) [source_qdm_phase_field \(31.33\)](#) [source_con_phase_field \(31.21\)](#) [source_rayo_semi_transp \(31.34\)](#) [tenseur_Reynolds_externe \(31.43\)](#)

Usage:

31.1 DP_Impose

Description: Source term to impose a pressure difference according to the formula : $DP = A + B * (Q - Q0)$

See also: [source_base \(31\)](#)

Usage:

DP_Impose obj Lire obj {

dp *champ_base*
surface *bloc_lecture*

}

where

- **dp** *champ_base* (16.1): the parameters of the previous formula $champ_uniforme = 3 A B Q0$ where $Q0$ is a volume flow (m3/s).
- **surface** *bloc_lecture* (3.9): Three syntaxes are possible for the surface definition block:
For VDF and VEF: { *X|Y|Z* = location subzone_name }
Only for VEF: { Surface surface_name }.
For polymac { Surface surface_name Orientation champ_uniforme }.

31.2 Source_Constituant_Vortex

Description: Special treatment for the reactor of vortex effect where reagents are injected just below the free surface in the liquid phase

See also: [source_base \(31\)](#)

Usage:

Source_Constituant_Vortex obj Lire obj {

[**senseur_interface** *bloc_lecture*]
[**rayon_spot** *float*]
[**delta_spot** *n x1 x2 ... xn*]
[**integrale** *float*]
[**debit** *float*]

}
where

- **senseur_interface** *bloc_lecture* (3.9): This is to be defined for the concentration equation of the reagents only and in the bloc of the sources. Here the user defines the position of the reagents injection.
- **rayon_spot** *float*: defines the radius of the concentration spot (tracer) injected in the fluid
- **delta_spot** *n x1 x2 ... xn*: dimensions of the injection (segment). the syntax is `dim val1 val2 [val3]`
- **integrale** *float*: the molar flowrate of injection
- **debit** *float*: a normalization of the molar flow rate. Advice: keep this value to 1.

31.3 Source_Transport_K_Eps_anisotherme

Description: Keywords to modify the source term constants in the anisotherm standard k-eps model epsilon transport equation. By default, these constants are set to: C1_eps=1.44 C2_eps=1.92 C3_eps=1.0

See also: `source_transport_k_eps` (31.40)

Usage:

Source_Transport_K_Eps_anisotherme obj Lire obj {

[**c3_eps** *float*]

[**c1_eps** *float*]

[**c2_eps** *float*]

}
where

- **c3_eps** *float*: Third constant.
- **c1_eps** *float* for inheritance: First constant.
- **c2_eps** *float* for inheritance: Second constant.

31.4 acceleration

Description: Momentum source term to take in account the forces due to rotation or translation of a non Galilean referential R' (centre 0') into the Galilean referential R (centre 0).

See also: `source_base` (31)

Usage:

acceleration obj Lire obj {

[**vitesse** *champ_base*]

[**acceleration** *champ_base*]

[**omega** *champ_base*]

[**domegadt** *champ_base*]

[**centre_rotation** *champ_base*]

[**option** *str* into ['terme_complet', 'coriolis_seul', 'entrainement_seul']]

}
where

- **vitesse** *champ_base* (16.1): Keyword for the velocity of the referential R' into the R referential ($d\mathbf{OO}'/dt$ term [m.s-1]). The velocity is mandatory when you want to print the total cinetic energy into the non-mobile Galilean referential R (see `Ec_dans_repere_fixe` keyword).

- **acceleration** *champ_base* (16.1): Keyword for the acceleration of the referential R' into the R referential ($d^2\mathbf{OO'}/dt^2$ term [m.s⁻²]). *field_base* is a time dependant field (eg: *Champ_Fonc_t*).
- **omega** *champ_base* (16.1): Keyword for a rotation of the referential R' into the R referential [rad.s⁻¹]. *field_base* is a 3D time dependant field specified for example by a *Champ_Fonc_t* keyword. The *time_field* field should have 3 components even in 2D (In 2D: 0 0 omega).
- **domegadt** *champ_base* (16.1): Keyword to define the time derivative of the previous rotation [rad.s⁻²]. Should be zero if the rotation is constant. The *time_field* field should have 3 components even in 2D (In 2D: 0 0 domegadt).
- **centre_rotation** *champ_base* (16.1): Keyword to specify the centre of rotation (expressed in R' coordinates) of R' into R (if the domain rotates with the R' referential, the centre of rotation is $\mathbf{O'=(0,0,0)}$). The *time_field* should have 2 or 3 components according the dimension 2 or 3.
- **option** *str* into ['terme_complet', 'coriolis_seul', 'entrainement_seul']: Keyword to specify the kind of calculation: *terme_complet* (default option) will calculate both the Coriolis and centrifugal forces, *coriolis_seul* will calculate the first one only, *entrainement_seul* will calculate the second one only.

31.5 boussinesq_concentration

Description: Class to describe a source term that couples the movement quantity equation and constituent transport equation with the Boussinesq hypothesis.

See also: *source_base* (31)

Usage:

boussinesq_concentration obj Lire obj {

c0 *n x1 x2 ... xn*
[**verif_boussinesq** *int*]

}

where

- **c0** *n x1 x2 ... xn*: Reference concentration field type. The only field type currently available is *Champ_Uniforme* (Uniform field).
- **verif_boussinesq** *int*: Keyword to check (1) or not (0) the reference concentration in comparison with the mean concentration value in the domain. It is set to 1 by default.

31.6 boussinesq_temperature

Description: Class to describe a source term that couples the movement quantity equation and energy equation with the Boussinesq hypothesis.

See also: *source_base* (31)

Usage:

boussinesq_temperature obj Lire obj {

t0 *str*
[**verif_boussinesq** *int*]

}

where

- **t0** *str*: Reference temperature value (oC or K). It can also be a time dependant function since the 1.6.6 version.

- **verif_boussinesq** *int*: Keyword to check (1) or not (0) the reference temperature in comparison with the mean temperature value in the domain. It is set to 1 by default.

31.7 canal_perio

Description: Momentum source term to maintain flow rate. The expression of the source term is:

$$S(t) = (2*(Q(0) - Q(t)) - (Q(0) - Q(t-dt)))/(coeff*dt*area)$$

Where:

coeff=damping coefficient

area=area of the periodic boundary

Q(t)=flow rate at time t

dt=time step

Three files will be created during calculation on a datafile named DataFile.data. The first file contains the flow rate evolution. The second file is useful for resuming a calculation with the flow rate of the previous stopped calculation, and the last one contains the pressure gradient evolution:

-DataFile_Channel_Flow_Rate_ProblemName_BoundaryName

-DataFile_Channel_Flow_Rate_repr_ProblemName_BoundaryName

-DataFile_Pressure_Gradient_ProblemName_BoundaryName

See also: source_base (31)

Usage:

canal_perio obj Lire obj {

bord *str*

[**h** *float*]

[**coeff** *float*]

[**debit_impose** *float*]

}

where

- **bord** *str*: The name of the (periodic) boundary normal to the flow direction.
- **h** *float*: Half height of the channel.
- **coeff** *float*: Damping coefficient (optional, default value is 10).
- **debit_impose** *float*: Optional option to specify the aimed flow rate Q(0). If not used, Q(0) is computed by the code after the projection phase, where velocity initial conditions are slightly changed to verify incompressibility.

31.8 coriolis

Description: Keyword for a Coriolis term in hydraulic equation. Warning: Only available in VDF.

See also: source_base (31)

Usage:

coriolis **omega**

where

- **omega** *str*: Value of omega.

31.9 darcy

Description: Class for calculation in a porous media with source term of Darcy $-\nu/K \cdot V$. This keyword must be used with a permeability model. For the moment there are two models : permeability constant or Ergun's law. Darcy source term is available for quasi compressible calculation. A new keyword is added for porosity (porosite).

See also: [source_base \(31\)](#)

Usage:

darcy bloc

where

- **bloc** *bloc_lecture* ([3.9](#)): Description.

31.10 dirac

Description: Class to define a source term corresponding to a volume power release in the energy equation.

See also: [source_base \(31\)](#)

Usage:

dirac position ch

where

- **position** *n x1 x2 ... xn*
- **ch** *champ_base* ([16.1](#)): Thermal power field type. To impose a volume power on a domain sub-area, the *Champ_Uniforme_Morceaux* (*partly_uniform_field*) type must be used.
Warning : The volume thermal power is expressed in W.m-3.

31.11 forchheimer

Description: Class to add the source term of Forchheimer $-C_f/\sqrt{K} \cdot V^2$ in the Navier-Stokes equations. We must precise a permeability model : constant or Ergun's law. Moreover we can give the constant C_f : by default its value is 1. Forchheimer source term is available also for quasi compressible calculation. A new keyword is added for porosity (porosite).

See also: [source_base \(31\)](#)

Usage:

forchheimer bloc

where

- **bloc** *bloc_lecture* ([3.9](#)): Description.

31.12 perte_charge_anisotrope

Description: Anisotropic pressure loss.

See also: [source_base \(31\)](#)

Usage:

perte_charge_anisotrope obj Lire obj {

```

    lambda str
    lambda_ortho str
    diam_hydr champ_don_base
    direction champ_don_base
    [ sous_zone str ]
}
where

```

- **lambda** *str*: Function for loss coefficient which may be Reynolds dependant (Ex: $64/Re$).
- **lambda_ortho** *str*: Function for loss coefficient in transverse direction which may be Reynolds dependant (Ex: $64/Re$).
- **diam_hydr** *champ_don_base* (16.6): Hydraulic diameter value.
- **direction** *champ_don_base* (16.6): Field which indicates the direction of the pressure loss.
- **sous_zone** *str*: Optional sub-area where pressure loss applies.

31.13 perte_charge_circulaire

Description: New pressure loss.

See also: [source_base \(31\)](#)

Usage:

```

perte_charge_circulaire obj Lire obj {
    lambda str
    lambda_ortho str
    diam_hydr champ_don_base
    diam_hydr_ortho champ_don_base
    direction champ_don_base
    [ sous_zone str ]
}
where

```

- **lambda** *str*: Function $f(Re_{tot}, Re_{long}, t, x, y, z)$ for loss coefficient in the longitudinal direction
- **lambda_ortho** *str*: function: Function $f(Re_{tot}, Re_{ortho}, t, x, y, z)$ for loss coefficient in transverse direction
- **diam_hydr** *champ_don_base* (16.6): Hydraulic diameter value.
- **diam_hydr_ortho** *champ_don_base* (16.6): Transverse hydraulic diameter value.
- **direction** *champ_don_base* (16.6): Field which indicates the direction of the pressure loss.
- **sous_zone** *str*: Optional sub-area where pressure loss applies.

31.14 perte_charge_directionnelle

Description: Directional pressure loss.

See also: [source_base \(31\)](#)

Usage:

```

perte_charge_directionnelle obj Lire obj {
    lambda str
    diam_hydr champ_don_base

```

```

    direction champ_don_base
    [ sous_zone str]

```

```

}

```

where

- **lambda** *str*: Function for loss coefficient which may be Reynolds dependant (Ex: 64/Re).
- **diam_hydr** *champ_don_base* (16.6): Hydraulic diameter value.
- **direction** *champ_don_base* (16.6): Field which indicates the direction of the pressure loss.
- **sous_zone** *str*: Optional sub-area where pressure loss applies.

31.15 perte_charge_isotrope

Description: Isotropic pressure loss.

See also: [source_base \(31\)](#)

Usage:

perte_charge_isotrope obj Lire obj {

```

    lambda str
    diam_hydr champ_don_base
    [ sous_zone str]

```

```

}

```

where

- **lambda** *str*: Function for loss coefficient which may be Reynolds dependant (Ex: 64/Re).
- **diam_hydr** *champ_don_base* (16.6): Hydraulic diameter value.
- **sous_zone** *str*: Optional sub-area where pressure loss applies.

31.16 perte_charge_reguliere

Description: Source term modelling the presence of a bundle of tubes in a flow.

See also: [source_base \(31\)](#)

Usage:

perte_charge_reguliere spec zone_name

where

- **spec** *spec_pdc_base* (31.17): Description of longitudinale or transversale type.
- **zone_name** *str*: Name of the sub-area occupied by the tube bundle. A Sous_Zone (Sub-area) type object called zone_name should have been previously created.

31.17 spec_pdc_base

Description: Class to read the source term modelling the presence of a bundle of tubes in a flow. Cf=A Re-B.

See also: [objet_lecture \(36\)](#) longitudinale (31.17.1) transversale (31.17.2)

Usage:

spec_pdc_base ch_a a [ch_b] [b]

where

- **ch_a** *str into* ['a', 'cf']: Keyword to be used to set law coefficient values for the coefficient of regular pressure losses.
- **a** *float*: Value of a law coefficient for regular pressure losses.
- **ch_b** *str into* ['b']: Keyword to be used to set law coefficient values for regular pressure losses.
- **b** *float*: Value of a law coefficient for regular pressure losses.

31.17.1 longitudinale

Description: Class to define the pressure loss in the direction of the tube bundle.

See also: [spec_pdc_base \(31.17\)](#)

Usage:

longitudinale **dir** **dd** **ch_a** **a** [**ch_b**] [**b**]

where

- **dir** *str into* ['x', 'y', 'z']: Direction.
- **dd** *float*: Tube bundle hydraulic diameter value. This value is expressed in m.
- **ch_a** *str into* ['a', 'cf']: Keyword to be used to set law coefficient values for the coefficient of regular pressure losses.
- **a** *float*: Value of a law coefficient for regular pressure losses.
- **ch_b** *str into* ['b']: Keyword to be used to set law coefficient values for regular pressure losses.
- **b** *float*: Value of a law coefficient for regular pressure losses.

31.17.2 transversale

Description: Class to define the pressure loss in the direction perpendicular to the tube bundle.

See also: [spec_pdc_base \(31.17\)](#)

Usage:

transversale **dir** **dd** **chaine_d** **d** **ch_a** **a** [**ch_b**] [**b**]

where

- **dir** *str into* ['x', 'y', 'z']: Direction.
- **dd** *float*: Value of the tube bundle step.
- **chaine_d** *str into* ['d']: Keyword to be used to set the value of the tube external diameter.
- **d** *float*: Value of the tube external diameter.
- **ch_a** *str into* ['a', 'cf']: Keyword to be used to set law coefficient values for the coefficient of regular pressure losses.
- **a** *float*: Value of a law coefficient for regular pressure losses.
- **ch_b** *str into* ['b']: Keyword to be used to set law coefficient values for regular pressure losses.
- **b** *float*: Value of a law coefficient for regular pressure losses.

31.18 perte_charge_singuliere

Description: Source term that is used to model a pressure loss over a surface area (transition through a grid, sudden enlargement) defined by the faces of elements located on the intersection of a subzone named `subzone_name` and a X,Y, or Z plane located at X,Y or Z = location.

See also: [source_base \(31\)](#)

Usage:

perte_charge_singuliere **obj** Lire **obj** {

```

    dir str into ['kx', 'ky', 'kz', 'K']
    [ coeff float]
    [ regul bloc_lecture]
    surface bloc_lecture
}
where

```

- **dir** *str into* ['kx', 'ky', 'kz', 'K']: KX, KY or KZ designate directional pressure loss coefficients for respectively X, Y or Z direction. Or in the case where you chose a target flow rate with regul. Use K for isotropic pressure loss coefficient
- **coeff** *float*: Value (float) of friction coefficient (KX, KY, KZ).
- **regul** *bloc_lecture* (3.9): option to have adjustable K with flowrate target
{ K0 valeur_initiale_de_k deb debit_cible eps intervalle_variation_mutiplicatif}.
- **surface** *bloc_lecture* (3.9): Three syntaxes are possible for the surface definition block:
For VDF and VEF: { X|Y|Z = location subzone_name }
Only for VEF: { Surface surface_name }.
For polymac { Surface surface_name Orientation champ_uniforme }

31.19 puissance_thermique

Description: Class to define a source term corresponding to a volume power release in the energy equation.

See also: [source_base \(31\)](#)

Usage:

```

puissance_thermique ch
where

```

- **ch** *champ_base* (16.1): Thermal power field type. To impose a volume power on a domain sub-area, the Champ_Uniforme_Morceaux (partly_uniform_field) type must be used.
Warning : The volume thermal power is expressed in W.m-3 in 3D (in W.m-2 in 2D). It is a power per volume unit (in a porous media, it is a power per fluid volume unit).

31.20 radioactive_decay

Description: Radioactive decay source term of the form $-\lambda_i c_i$, where $0 \leq i \leq N$, N is the number of component of the constituent, c_i and λ_i are the concentration and the decay constant of the i-th component of the constituent.

See also: [source_base \(31\)](#)

Usage:

```

radioactive_decay val
where

```

- **val** *n x1 x2 ... xn*: n is the number of decay constants to read (int), and val1, val2... are the decay constants (double)

31.21 source_con_phase_field

Description: Keyword to define the source term of the Cahn-Hilliard equation.

See also: `source_base` (31)

Usage:

```
source_con_phase_field obj Lire obj {  
    temps_d_affichage int  
    alpha float  
    beta float  
    kappa float  
    kappa_variable bloc_kappa_variable  
    moyenne_de_kappa str  
    multiplicateur_de_kappa float  
    couplage_NS_CH str  
    implication_CH str into ['oui', 'non']  
    gmres_non_lineaire str into ['oui', 'non']  
    seuil_cv_iterations_ptfixe float  
    seuil_residu_ptfixe float  
    seuil_residu_gmresnl float  
    dimension_espace_de_krylov int  
    nb_iterations_gmresnl int  
    residu_min_gmresnl float  
    residu_max_gmresnl float  
    [ potentiel_chimique bloc_potentiel_chim ]  
}
```

where

- **temps_d_affichage** *int*: Time during the characteristics of the problem are shown before calculation.
- **alpha** *float*: Internal capillary coefficient α .
- **beta** *float*: Parameter β of the model.
- **kappa** *float*: Mobility coefficient κ_0 .
- **kappa_variable** *bloc_kappa_variable* (31.22): To define a mobility which depends on concentration C .
- **moyenne_de_kappa** *str*: To define how mobility κ is calculated on faces of the mesh according to cell-centered values (chaîne is arithmetique/harmonique/geometrique).
- **multiplicateur_de_kappa** *float*: To define the parameter of the mobility expression when mobility depends on C .
- **couplage_NS_CH** *str*: Evaluating time chosen for the term source calculation into the Navier Stokes equation (chaîne is $\text{mutilde}(n+1/2)/\text{mutilde}(n)$, in order to be conservative, the first choice seems better).
- **implication_CH** *str into ['oui', 'non']*: To define if the Cahn-Hilliard will be solved using a implicit algorithm or not.
- **gmres_non_lineaire** *str into ['oui', 'non']*: To define the algorithm to solve Cahn-Hilliard equation (oui: Newton-Krylov method, non: fixed point method).
- **seuil_cv_iterations_ptfixe** *float*: Convergence threshold (an option of the fixed point method).
- **seuil_residu_ptfixe** *float*: Threshold for the matrix inversion used in the method (an option of the fixed point method).
- **seuil_residu_gmresnl** *float*: Convergence threshold (an option of the Newton-Krylov method).
- **dimension_espace_de_krylov** *int*: Vector numbers used in the method (an option of the Newton-Krylov method).

- **nb_iterations_gmresnl** *int*: Maximal iteration (an option of the Newton-Krylov method).
- **residu_min_gmresnl** *float*: Minimal convergence threshold (an option of the Newton-Krylov method).
- **residu_max_gmresnl** *float*: Maximal convergence threshold (an option of the Newton-Krylov method).
- **potentiel_chimique** *bloc_potentiel_chim* (31.23): chemical potential function

31.22 bloc_kappa_variable

Description: if the parameter of the mobility, kappa, depends on C

See also: `objet_lecture` (36)

Usage:

expr
where

- **expr** *bloc_lecture* (3.9): choice for kappa_variable

31.23 bloc_potentiel_chim

Description: if the chemical potential function is an univariate function

See also: `objet_lecture` (36)

Usage:

expr
where

- **expr** *bloc_lecture* (3.9): choice for potentiel_chimique

31.24 source_constituant

Description: Keyword to specify source rates, in $[[C]/s]$, for each one of the nb constituents. [C] is the concentration unit.

See also: `source_base` (31)

Usage:

source_constituant ch
where

- **ch** *champ_base* (16.1): Field type.

31.25 flottabilite

Description: buoyancy effect

See also: `source_base` (31)

Usage:

flottabilite

31.26 source_generique

Description: to define a source term depending on some discrete fields of the problem and (or) analytic expression. It is expressed by the way of a generic field usually used for post-processing.

See also: [source_base \(31\)](#)

Usage:

source_generique **champ**

where

- **champ** *champ_generique_base* (8): the source field

31.27 masse_ajoutee

Description: weight added effect

See also: [source_base \(31\)](#)

Usage:

masse_ajoutee

31.28 source_pdf

Description: Source term for Penalised Direct Forcing (PDF) method.

See also: [source_pdf_base \(31.30\)](#)

Usage:

source_pdf obj Lire obj {

aire *champ_base*

rotation *champ_base*

 [**transpose_rotation**]

modele *bloc_pdf_model*

 [**interpolation** *interpolation_ibm_base*]

}

where

- **aire** *champ_base* (16.1) for inheritance: volumic field: a boolean for the cell (0 or 1) indicating if the obstacle is in the cell
- **rotation** *champ_base* (16.1) for inheritance: volumic field with 9 components representing the change of basis on cells (local to global). Used for rotating cases for example.
- **transpose_rotation** for inheritance: whether to transpose the basis change matrix.
- **modele** *bloc_pdf_model* (31.29) for inheritance: model used for the Penalized Direct Forcing
- **interpolation** *interpolation_ibm_base* (18) for inheritance: interpolation method

31.29 bloc_pdf_model

Description: not_set

See also: [objet_lecture \(36\)](#)

Usage:

{

```

    eta float
    [ temps_relaxation_coefficient_PDF float]
    [ echelle_relaxation_coefficient_PDF float]
    [ local ]
    [ vitesse_imposee_data champ_base]
    [ vitesse_imposee_fonction troismots]
}
where

```

- **eta** *float*: penalization coefficient
- **temps_relaxation_coefficient_PDF** *float*: time relaxation on the forcing term to help
- **echelle_relaxation_coefficient_PDF** *float*: time relaxation on the forcing term to help convergence
- **local** : rien whether the prescribed velocity is expressed in the global or local basis
- **vitesse_imposee_data** *champ_base* (16.1): Prescribed velocity as a field
- **vitesse_imposee_fonction** *troismots* (31.29.1): Prescribed velocity as a set of ananalytical component

31.29.1 troismots

Description: Three words.

See also: `objet_lecture` (36)

Usage:

```

mot_1 mot_2 mot_3
where

```

- **mot_1** *str*: First word.
- **mot_2** *str*: Snd word.
- **mot_3** *str*: Third word.

31.30 source_pdf_base

Description: Base class of the source term for the Immersed Boundary Penalized Direct Forcing method (PDF)

See also: `source_base` (31) `source_pdf` (31.28)

Usage:

```

source_pdf_base obj Lire obj {
    aire champ_base
    rotation champ_base
    [ transpose_rotation ]
    modele bloc_pdf_model
    [ interpolation interpolation_ibm_base]
}
where

```

- **aire** *champ_base* (16.1): volumic field: a boolean for the cell (0 or 1) indicating if the obstacle is in the cell

- **rotation** *champ_base* (16.1): volumic field with 9 components representing the change of basis on cells (local to global). Used for rotating cases for example.
- **transpose_rotation** : whether to transpose the basis change matrix.
- **modele** *bloc_pdf_model* (31.29): model used for the Penalized Direct Forcing
- **interpolation** *interpolation_ibm_base* (18): interpolation method

31.31 source_qdm

Description: Momentum source term in the Navier-Stokes equations.

See also: *source_base* (31)

Usage:

source_qdm ch
where

- **ch** *champ_base* (16.1): Field type.

31.32 source_qdm_lambdaup

Description: This source term is a dissipative term which is intended to minimise the energy associated to non-conformscales u' (responsible for spurious oscillations in some cases). The equation for these scales can be seen as: $du'/dt = -\lambda u' + \text{grad } P'$ where $-\lambda u'$ represents the dissipative term, with $\lambda = a/\Delta t$ For Crank-Nicholson temporal scheme, recommended value for a is 2.

Remark : This method requires to define a filtering operator.

See also: *source_base* (31)

Usage:

source_qdm_lambdaup obj Lire obj {

```

    lambda float
    [ lambda_min float]
    [ lambda_max float]
    [ ubar_umprim_cible float]

```

}

where

- **lambda** *float*: value of λ
- **lambda_min** *float*: value of λ_{\min}
- **lambda_max** *float*: value of λ_{\max}
- **ubar_umprim_cible** *float*: value of $\bar{u}_{\text{umprim_cible}}$

31.33 source_qdm_phase_field

Description: Keyword to define the capillary force into the Navier Stokes equation for the Phase Field problem.

See also: *source_base* (31)

Usage:

source_qdm_phase_field obj Lire obj {

```

    forme_du_terme_source int
}
where

```

- **forme_du_terme_source** *int*: Kind of the source term (1, 2, 3 or 4).

31.34 source_rayo_semi_transp

Description: Radiative term source in energy equation.

See also: [source_base \(31\)](#)

Usage:

source_rayo_semi_transp

31.35 source_robin

Description: This source term should be used when a `Paroi_decalee_Robin` boundary condition is set in a hydraulic equation. The source term will be applied on the `N` specified boundaries. To post-process the values of `tauw`, `u_tau` and `Reynolds_tau` into the files `tauw_robin.dat`, `reynolds_tau_robin.dat` and `u_tau_robin.dat`, you must add a block `Traitement_particulier { canal { } }`

See also: [source_base \(31\)](#)

Usage:

source_robin bords

where

- **bords** *vect_nom* ([3.112](#))

31.36 source_robin_scalaire

Description: This source term should be used when a `Paroi_decalee_Robin` boundary condition is set in an energy equation. The source term will be applied on the `N` specified boundaries. The values `temp_wall_valueI` are the temperature specified on the `I`th boundary. The last value `dt_impr` is a printing period which is mandatory to specify in the data file but has no effect yet.

See also: [source_base \(31\)](#)

Usage:

source_robin_scalaire bords

where

- **bords** *listdeuxmots_sacc* ([31.37](#))

31.37 listdeuxmots_sacc

Description: List of groups of two words (without curly brackets).

See also: [listobj \(35.3\)](#)

Usage:

`n object1 object2`

list of *deuxmots* ([5.14](#))

31.38 source_th_tdivu

Description: This term source is dedicated for any scalar (called T) transport. Coupled with upwind (amont) or muscl scheme, this term gives for final expression of convection : $\text{div}(\mathbf{U}.T)-T.\text{div}(\mathbf{U})=\mathbf{U}.\text{grad}(T)$ This ensures, in incompressible flow when divergence free is badly resolved, to stay in a better way in the physical boundaries.

Warning: Only available in VEF discretization.

See also: [source_base \(31\)](#)

Usage:

source_th_tdivu

31.39 trainee

Description: drag effect

See also: [source_base \(31\)](#)

Usage:

trainee

31.40 source_transport_k_eps

Description: Keyword to alter the source term constants in the standard k-eps model epsilon transport equation. By default, these constants are set to: C1_eps=1.44 C2_eps=1.92

See also: [source_base \(31\)](#) [Source_Transport_K_Eps_anisotherme \(31.3\)](#) [source_transport_k_eps_aniso_concen \(31.41\)](#) [source_transport_k_eps_aniso_therm_concen \(31.42\)](#)

Usage:

source_transport_k_eps obj Lire obj {

 [**c1_eps** *float*]

 [**c2_eps** *float*]

}

where

- **c1_eps** *float*: First constant.
- **c2_eps** *float*: Second constant.

31.41 source_transport_k_eps_aniso_concen

Description: Keywords to modify the source term constants in the anisotherm standard k-eps model epsilon transport equation. By default, these constants are set to: C1_eps=1.44 C2_eps=1.92 C3_eps=1.0

See also: [source_transport_k_eps \(31.40\)](#)

Usage:

source_transport_k_eps_aniso_concen obj Lire obj {

 [**c3_eps** *float*]

 [**c1_eps** *float*]

 [**c2_eps** *float*]

}

where

- **c3_eps** *float*: Third constant.
- **c1_eps** *float* for inheritance: First constant.
- **c2_eps** *float* for inheritance: Second constant.

31.42 source_transport_k_eps_aniso_therm_concen

Description: Keywords to modify the source term constants in the anisotherm standard k-eps model epsilon transport equation. By default, these constants are set to: C1_eps=1.44 C2_eps=1.92 C3_eps=1.0

See also: source_transport_k_eps ([31.40](#))

Usage:

source_transport_k_eps_aniso_therm_concen obj Lire obj {

[**c3_eps** *float*]

[**c1_eps** *float*]

[**c2_eps** *float*]

}

where

- **c3_eps** *float*: Third constant.
- **c1_eps** *float* for inheritance: First constant.
- **c2_eps** *float* for inheritance: Second constant.

31.43 tenseur_Reynolds_externe

Description: Use a neural network to estimate the values of the Reynolds tensor. The structure of the neural networks is stored in a file located in the share/reseaux_neurones directory.

See also: source_base ([31](#))

Usage:

tenseur_Reynolds_externe obj Lire obj {

nom_fichier *str*

}

where

- **nom_fichier** *str*: The base name of the file.

31.44 terme_puissance_thermique_echange_impose

Description: Source term to impose thermal power according to formula : $P = h_{imp} * (T - T_{ext})$. Where T is the Trust temperature, T_{ext} is the outside temperature with which energy is exchanged via an exchange coefficient h_{imp}

See also: source_base ([31](#))

Usage:

terme_puissance_thermique_echange_impose obj Lire obj {

```

    himp champ_base
    Text champ_base
}

```

where

- **himp** *champ_base* (16.1): the exchange coefficient
- **Text** *champ_base* (16.1): the outside temperature

32 sous_zone

Description: It is an object type describing a domain sub-set.

A Sous_Zone (Sub-area) type object must be associated with a Domaine type object. The Read (Lire) interpreter is used to define the items comprising the sub-area.

Caution: The Domain type object *nom_domaine* must have been meshed (and triangulated or tetrahedralised in VEF) prior to carrying out the Associate (Associer) *nom_sous_zone nom_domaine* instruction; this instruction must always be preceded by the read instruction.

See also: *objet_u* (37)

Usage:

```

sous_zone obj Lire obj {
    [ restriction str]
    [ rectangle bloc_origine_cotes]
    [ segment bloc_origine_cotes]
    [ boite bloc_origine_cotes]
    [ liste n n1 n2 ... nn]
    [ fichier str]
    [ intervalle deuxentiers]
    [ polynomes bloc_lecture]
    [ couronne bloc_couronne]
    [ tube bloc_tube]
    [ fonction_sous_zone str]
    [ union str]
}

```

where

- **restriction** *str*: The elements of the sub-area *nom_sous_zone* must be included into the other sub-area named *nom_sous_zone2*. This keyword should be used first in the Read keyword.
- **rectangle** *bloc_origine_cotes* (32.1): The sub-area will include all the domain elements whose centre of gravity is within the Rectangle (in dimension 2).
- **segment** *bloc_origine_cotes* (32.1)
- **boite** *bloc_origine_cotes* (32.1): The sub-area will include all the domain elements whose centre of gravity is within the Box (in dimension 3).
- **liste** *n n1 n2 ... nn*: The sub-area will include *n* domain items, numbers No. 1 No. *i* No. *n*.
- **fichier** *str*: The sub-area is read into the file filename.
- **intervalle** *deuxentiers* (5.12.5): The sub-area will include domain items whose number is between *n1* and *n2* (where *n1* ≤ *n2*).
- **polynomes** *bloc_lecture* (3.9): A REPENDRE
- **couronne** *bloc_couronne* (32.2): In 2D case, to create a couronne.
- **tube** *bloc_tube* (32.3): In 3D case, to create a tube.
- **fonction_sous_zone** *str*: Keyword to build a sub-area with the the elements included into the area defined by *fonction* > 0.

- **union** *str*: The elements of the sub-area `nom_sous_zone3` will be added to the sub-area `nom_sous_zone`. This keyword should be used last in the Read keyword.

32.1 bloc_origine_cotes

Description: Class to create a rectangle (or a box).

See also: `objet_lecture` (36)

Usage:

name origin name2 cotes
where

- **name** *str* into [*'Origine'*]: Keyword to define the origin of the rectangle (or the box).
- **origin** *x1 x2 (x3)*: Coordinates of the origin of the rectangle (or the box).
- **name2** *str* into [*'Cotes'*]: Keyword to define the length along the axes.
- **cotes** *x1 x2 (x3)*: Length along the axes.

32.2 bloc_couronne

Description: Class to create a couronne (2D).

See also: `objet_lecture` (36)

Usage:

name origin name3 ri name4 re
where

- **name** *str* into [*'Origine'*]: Keyword to define the center of the circle.
- **origin** *x1 x2 (x3)*: Center of the circle.
- **name3** *str* into [*'ri'*]: Keyword to define the interior radius.
- **ri** *float*: Interior radius.
- **name4** *str* into [*'re'*]: Keyword to define the exterior radius.
- **re** *float*: Exterior radius.

32.3 bloc_tube

Description: Class to create a tube (3D).

See also: `objet_lecture` (36)

Usage:

name origin name2 direction name3 ri name4 re name5 h
where

- **name** *str* into [*'Origine'*]: Keyword to define the center of the tube.
- **origin** *x1 x2 (x3)*: Center of the tube.
- **name2** *str* into [*'dir'*]: Keyword to define the direction of the main axis.
- **direction** *str* into [*'X', 'Y', 'Z'*]: direction of the main axis X, Y or Z
- **name3** *str* into [*'ri'*]: Keyword to define the interior radius.
- **ri** *float*: Interior radius.
- **name4** *str* into [*'re'*]: Keyword to define the exterior radius.
- **re** *float*: Exterior radius.
- **name5** *str* into [*'hauteur'*]: Keyword to define the height of the tube.
- **h** *float*: Height of the tube.

33 turbulence_paroι_base

Description: Basic class for wall laws for Navier-Stokes equations.

See also: objet_u (37) loi_puissance_hydr (33.3) loi_standard_hydr (33.4) loi_standard_hydr_old (33.5) paroi_tble (33.8) negligeable (33.7) utau_imp (33.12)

Usage:

33.1 loi_ciofalo_hydr

Description: A Loi_ciofalo_hydr law for wall turbulence for NAVIER STOKES equations.

See also: loi_standard_hydr (33.4)

Usage:

loi_ciofalo_hydr

33.2 loi_expert_hydr

Description: This keyword is similar to the previous keyword Loi_standard_hydr but has several additional options into brackets.

See also: loi_standard_hydr (33.4)

Usage:

```
loi_expert_hydr obj Lire obj {  
    [ u_star_impose float]  
    [ methode_calcul_face_keps_impose str into ['toutes_les_faces_accrochees', 'que_les_faces_des-  
_elts_dirichlet']]  
    [ kappa float]  
    [ Erugu float]  
    [ A_plus float]  
}  
where
```

- **u_star_impose** float: The value of the friction velocity (u^*) is not calculated but given by the user.
- **methode_calcul_face_keps_impose** str into ['toutes_les_faces_accrochees', 'que_les_faces_des-
_elts_dirichlet']: The available options select the algorithm to apply K and Eps boundaries condition (the algorithms differ according to the faces).
toutes_les_faces_accrochees : Default option in 2D (the algorithm is the same than the algorithm used in Loi_standard_hydr)
que_les_faces_des_elts_dirichlet : Default option in 3D (another algorithm where less faces are concerned when applying K-Eps boundary condition).
- **kappa** float: The value can be changed from the default one (0.415)
- **Erugu** float: The value of E can be changed from the default one for a smooth wall (9.11). It is also possible to change the value for one boundary wall only with paroi_rugueuse keyword/
- **A_plus** float: The value can can be changed from the default one (26.0)

33.3 loi_puissance_hydr

Description: A Loi_puissance_hydr law for wall turbulence for NAVIER STOKES equations.

See also: [turbulence_paro_base \(33\)](#)

Usage:

33.4 loi_standard_hydr

Description: Keyword for the logarithmic wall law for a hydraulic problem. Loi_standard_hydr refers to first cell rank eddy-viscosity defined from continuous analytical functions, whereas Loi_standard_hydr_3couches from functions separately defined for each sub-layer

See also: [turbulence_paro_base \(33\)](#) [loi_ww_hydr \(33.6\)](#) [loi_ciofalo_hydr \(33.1\)](#) [loi_expert_hydr \(33.2\)](#)

Usage:

loi_standard_hydr

33.5 loi_standard_hydr_old

Description: not_set

See also: [turbulence_paro_base \(33\)](#)

Usage:

loi_standard_hydr_old

33.6 loi_ww_hydr

Description: laws have been qualified on channel calculation

See also: [loi_standard_hydr \(33.4\)](#)

Usage:

33.7 negligable

Description: Keyword to suppress the calculation of a law of the wall with a turbulence model. The wall stress is directly calculated with the derivative of the velocity, in the direction perpendicular to the wall ($\tau_{\text{tan}}/\rho = \nu \, dU/dy$).

Warning: This keyword is not available for k-epsilon models. In that case you must choose a wall law.

See also: [turbulence_paro_base \(33\)](#)

Usage:

negligable

33.8 paroi_tble

Description: Keyword for the Thin Boundary Layer Equation wall-model (a more complete description of the model can be found into this PDF file). The wall shear stress is evaluated thanks to boundary layer equations applied in a one-dimensional fine grid in the near-wall region.

See also: [turbulence_paro_base \(33\)](#)

Usage:

paroi_tble obj Lire obj {

```

[ n int]
[ facteur float]
[ modele_visco str]
[ stats twofloat]
[ sonde_tble liste_sonde_tble]
[ restart ]
[ stationnaire entierfloat]
[ lambda str]
[ mu str]
[ sans_source_boussinesq ]
[ alpha float]
[ kappa float]
}
where

```

- **n** *int*: Number of nodes in the TBLE grid (mandatory option).
- **facteur** *float*: Stretching ratio for the TBLE grid (to refine, the TBLE facteur must be greater than 1).
- **modele_visco** *str*: File name containing the description of the eddy viscosity model.
- **stats** *twofloat* (33.9): Statistics of the TBLE velocity and turbulent viscosity profiles. 2 values are required : the starting time and ending time of the statistics computation.
- **sonde_tble** *liste_sonde_tble* (33.10)
- **restart**
- **stationnaire** *entierfloat* (33.11)
- **lambda** *str*
- **mu** *str*
- **sans_source_boussinesq**
- **alpha** *float*
- **kappa** *float*

33.9 twofloat

Description: two reals.

See also: `objet_lecture` (36)

Usage:

a b
where

- **a** *float*: First real.
- **b** *float*: Second real.

33.10 liste_sonde_tble

Description: `not_set`

See also: `listobj` (35.3)

Usage:

`n object1 object2`
list of *sonde_tble* (33.10.1)

33.10.1 sonde_tble

Description: not_set

See also: objet_lecture (36)

Usage:

name point

where

- **name** *str*
- **point** *un_point* (3.18.3)

33.11 entierfloat

Description: An integer and a real.

See also: objet_lecture (36)

Usage:

the_int the_float

where

- **the_int** *int*: Integer.
- **the_float** *float*: Real.

33.12 utau_imp

Description: Keyword to impose the friction velocity on the wall with a turbulence model for thermohydraulic problems. There are two possibilities to use this keyword :

1 - we can impose directly the value of the friction velocity u_{star} .

2 - we can also give the friction coefficient and hydraulic diameter. So, TRUST determines the friction velocity by : $u_{star} = U \cdot \sqrt{\lambda_c / 8}$.

See also: turbulence_patoi_base (33)

Usage:

utau_imp obj Lire obj {

[**u_tau** *champ_base*]

[**lambda_c** *str*]

[**diam_hydr** *champ_base*]

}

where

- **u_tau** *champ_base* (16.1): Field type.
- **lambda_c** *str*: The friction coefficient. It can be function of the spatial coordinates x,y,z, the Reynolds number Re , and the hydraulic diameter.
- **diam_hydr** *champ_base* (16.1): The hydraulic diameter.

34 turbulence_paroι_scalaire_base

Description: Basic class for wall laws for energy equation.

See also: [objet_u \(37\)](#) [loi_odvm \(34.4\)](#) [loi_WW_scalaire \(34.1\)](#) [loi_standard_hydr_scalaire \(34.6\)](#) [loi_analytique_scalaire \(34.2\)](#) [paroi_tble_scal \(34.8\)](#) [loi_paroι_nu_impose \(34.5\)](#) [negligeable_scalaire \(34.7\)](#)

Usage:

34.1 loi_WW_scalaire

Description: not_set

See also: [turbulence_paroι_scalaire_base \(34\)](#)

Usage:

loi_WW_scalaire

34.2 loi_analytique_scalaire

Description: not_set

See also: [turbulence_paroι_scalaire_base \(34\)](#)

Usage:

loi_analytique_scalaire

34.3 loi_expert_scalaire

Description: Keyword similar to keyword `Loi_standard_hydr_scalaire` but with additional option.

See also: [loi_standard_hydr_scalaire \(34.6\)](#)

Usage:

```
loi_expert_scalaire obj Lire obj {  
    [ prdt_sur_kappa float ]  
    [ calcul_ldp_en_flux_impose int into [0, 1] ]  
}  
where
```

- **prdt_sur_kappa** *float*: This option is to change the default value of 2.12 in the scalable wall function.
- **calcul_ldp_en_flux_impose** *int into [0, 1]*: By default (value set to 0), the law of the wall is not applied for a wall with a Neumann condition. With value set to 1, the law is applied even on a wall with Neumann condition.

34.4 loi_odvm

Description: Thermal wall-function based on the simultaneous 1D resolution of a turbulent thermal boundary-layer and a variance transport equation, adapted to conjugate heat-transfer problems with fluid/solid thermal interaction (where a specific boundary condition should be used : `Paroi_Echange_Contact_OVDM_VDF`). This law is also available with isothermal walls.

See also: [turbulence_paroι_scalaire_base \(34\)](#)

Usage:

loi_odvm obj Lire obj {

n *int*
 gamma *float*
 [**stats** *floatfloat*]
 [**check_files**]

}

where

- **n** *int*: Number of points per face in the 1D uniform meshes. **n** should be chosen in order to have the first point situated near $\Delta y = 1/3$.
- **gamma** *float*: Smoothing parameter of the signal between $10e-5$ (no smoothing) and $10e-1$ (high averaging).
- **stats** *floatfloat* ([5.15](#)): **value_t0** **value_dt**: Only for plane channel flow, it gives mean and root mean square profiles in the fine meshes, since **value_t0** and every **value_dt** seconds. The values are printed into files named ODVM_fields*.dat.
- **check_files**: It gives for one boundary face a historical view of local instantaneous and filtered values, as well as the calculated variance profiles from the resolution of the equation. The printed values are into the file Suivi_ndeb.dat.

34.5 loi_paroι_nu_impose

Description: Keyword to impose Nusselt numbers on the wall for the thermohydraulic problems. To use this option, it is necessary to give in the data file the value of the hydraulic diameter and the expression of the Nusselt number.

See also: [turbulence_paroι_scalaire_base \(34\)](#)

Usage:

loi_paroι_nu_impose obj Lire obj {

nusselt *str*
 diam_hydr *champ_base*

}

where

- **nusselt** *str*: The Nusselt number. This expression can be a function of **x**, **y**, **z**, **Re** (Reynolds number), **Pr** (Prandtl number).
- **diam_hydr** *champ_base* ([16.1](#)): The hydraulic diameter.

34.6 loi_standard_hydr_scalaire

Description: Keyword for the law of the wall.

See also: [turbulence_paroι_scalaire_base \(34\)](#) [loi_expert_scalaire \(34.3\)](#)

Usage:

loi_standard_hydr_scalaire

34.7 **negligeable_scalaire**

Description: Keyword to suppress the calculation of a law of the wall with a turbulence model for thermo-hydraulic problems. The wall stress is directly calculated with the derivative of the velocity, in the direction perpendicular to the wall.

See also: [turbulence_paro_i_scalaire_base \(34\)](#)

Usage:

negligeable_scalaire

34.8 **paroi_tble_scal**

Description: Keyword for the Thin Boundary Layer Equation thermal wall-model.

See also: [turbulence_paro_i_scalaire_base \(34\)](#)

Usage:

```
paroi_tble_scal obj Lire obj {  
    [ n int]  
    [ facteur float]  
    [ modele_visco str]  
    [ nb_comp int]  
    [ stats fourfloat]  
    [ sonde_tble liste_sonde_tble]  
    [ prandtl float]  
}
```

where

- **n** *int*: Number of nodes in the TBLE grid (mandatory option).
- **facteur** *float*: Stretching ratio for the TBLE grid (to refine, the TBLE facteur must be greater than 1).
- **modele_visco** *str*: File name containing the description of the eddy viscosity model.
- **nb_comp** *int*: Number of component to solve in the fine grid (1 if 2D simulation (2D not available yet), 2 if 3D simulation).
- **stats** *fourfloat* ([34.9](#)): Statistics of the TBLE velocity and turbulent viscosity profiles. 4 values are required : the starting time of velocity averaging, the starting time of the RMS fluctuations, the ending time of the statistics computation and finally the print time period for the statistics.
- **sonde_tble** *liste_sonde_tble* ([33.10](#))
- **prandtl** *float*

34.9 **fourfloat**

Description: Four reals.

See also: [objet_lecture \(36\)](#)

Usage:

a b c d
where

- **a** *float*: First real.
- **b** *float*: Second real.
- **c** *float*: Third real.
- **d** *float*: Fourth real.

35 listobj_impl

Description: not_set

See also: objet_u (37) listobj (35.3)

Usage:

35.1 list_un_pb

Description: pour les groupes

See also: listobj (35.3)

Usage:

{ object1 , object2 }

list of *un_pb* (35.2) separated with ,

35.2 un_pb

Description: pour les groupes

See also: objet_lecture (36)

Usage:

mot

where

- **mot** *str*: the string

35.3 listobj

Description: List of objects.

See also: listobj_impl (35) champs_a_post (4.2.21) list_stat_post (4.2.24) listpoints (4.2.7) sondes (4.2.3) listchamp_generique (8.3) list_nom_virgule (8.2) definition_champs (4.2.1) post_processings (4.3) liste_post (4.5) liste_post_ok (4.4) condlims (4.14.1) sources (5.5) vect_nom (3.112) list_nom (3.97) list_bord (3.59.4) list_bloc_mailler (3.59) list_un_pb (35.1) list_list_nom (4.12) ecrire_fichier_xyz_valeur_param (5.6) pp (5.10) listdeuxmots_sacc (31.37) liste_sonde_tble (33.10) listeqn (4.16) list_info_med (4.43) listsous_zone_valeur (5.2.12) reactions (9.1)

Usage:

36 objet_lecture

Description: Auxiliary class for reading.

See also: objet_u (37) bloc_lecture (3.9) deuxmots (5.14) troismots (31.29.1) format_file (4.6) deuxentiers (5.12.5) floatfloat (5.15) entierfloat (33.11) champ_a_post (4.2.22) champs_posts (4.2.20) stat_post_deriv (4.2.25) stats_posts (4.2.23) stats_serie_posts (4.2.31) sonde_base (4.2.5) un_point (3.18.3) sonde (4.2.4) definition_champ (4.2.2) postraitement_base (4.4.2) un_postraitement (4.3.1) type_un_post (4.5.2) type_postraitement_ft_lata (4.5.3) un_postraitement_spec (4.5.1) nom_postraitement (4.4.1) condinit (5.4.1) condinits (5.4) condlimlu (4.14.2) mailler_base (3.59.1) defbord (3.59.7) bord_base (3.59.5) bloc_pave

[\(3.59.3\)](#) [un_pb \(35.2\)](#) [bords_ecrire \(5.6.2\)](#) [ecrire_fichier_xyz_valeur_item \(5.6.1\)](#) [convection_deriv \(5.2.1\)](#)
[bloc_convection \(5.2\)](#) [diffusion_deriv \(5.3.1\)](#) [op_implicite \(5.3.10\)](#) [bloc_diffusion \(5.3\)](#) [parametre_equation-
_base \(5.7\)](#) [traitement_particulier_base \(5.16.1\)](#) [traitement_particulier \(5.16\)](#) [penalisation_l2_ftd_lec \(5.10.1\)](#)
[dt_impr_ustar_mean_only \(5.12.1\)](#) [modele_turbulence_hyd_deriv \(5.12\)](#) [paroi_ft_disc_deriv \(12.61\)](#) [bloc-
_sutherland \(22.7\)](#) [form_a_nb_points \(5.12.3\)](#) [fourfloat \(34.9\)](#) [twofloat \(33.9\)](#) [sonde_tble \(33.10.1\)](#) [remove-
_elem_bloc \(3.87\)](#) [lecture_bloc_moment_base \(3.18\)](#) [bloc_origine_cotes \(32.1\)](#) [bloc_couronne \(32.2\)](#) [bloc-
_tube \(32.3\)](#) [verifiercoin_bloc \(3.115\)](#) [bloc_lecture_poro \(3.71\)](#) [bloc_lec_champ_init_canal_sinal \(16.17\)](#)
[fonction_champ_reprise \(16.13\)](#) [troisf \(3.44\)](#) [spec_pdc_r_base \(31.17\)](#) [info_med \(4.43.1\)](#) [methode_transport-
_deriv \(5.44\)](#) [decoup \(16.3\)](#) [bloc_ef \(5.2.9\)](#) [sous_zone_valeur \(5.2.13\)](#) [bloc_diffusion_standard \(5.3.7\)](#) [re-
action \(9.1.1\)](#) [bloc_pdf_model \(31.29\)](#) [bloc_decouper \(3.67\)](#) [format_lata_to_med \(3.55\)](#) [floatentier \(5.12.6\)](#)
[modele_fonction_bas_reynolds_base \(5.12.21\)](#) [bloc_lecture_turb_synt \(17.8\)](#) [bloc_lecture_remaillage \(5.45\)](#)
[objet_lecture_maintien_temperature \(5.31\)](#) [interpolation_champ_face_deriv \(5.47\)](#) [parcours_interface \(5.46\)](#)
[injection_marqueur \(5.50\)](#) [penalisation_forcage \(5.35\)](#) [bloc_rho_fonc_c \(5.37.2\)](#) [bloc_boussinesq \(5.37.1\)](#)
[approx_boussinesq \(5.37\)](#) [bloc_mu_fonc_c \(5.38.2\)](#) [bloc_visco2 \(5.38.1\)](#) [visco_dyn_cons \(5.38\)](#) [bloc_kappa-
_variable \(31.22\)](#) [bloc_potentiel_chim \(31.23\)](#) [eq_rayo_semi_transp \(4.14\)](#) [ceg_areva \(5.16.11\)](#) [ceg_cea-
_jaea \(5.16.12\)](#)

Usage:

37 index

Index

/*, 212
#, 234

, 120, 126, 129, 162
associer, 23
champ_post_statistiques_correlation, 78, 215
champ_post_statistiques_ecart_type, 78, 216
champ_post_statistiques_moyenne, 78, 219
champ_uniforme, 268
decoupebord_pour_rayonnement, 27
decouper, 48, 298
discretiser, 29
divergence, 215
ecrire_fichier, 67
extraction, 217
fin, 37
gradient, 217
interpolation, 218
interpolation_ibm_aucune, 282
interpolation_ibm_element_fluide, 282
interpolation_ibm_gradient_moyen, 283
interpolation_ibm_hybride, 283
lire, 53
lire_fichier, 54
lire_fichier_bin, 54
lire_med, 21
morceau_equation, 218
operateur_eqn, 214
postraitement, 80
postraitements, 79
raffiner_simplexes, 53
rectify_mesh, 55
reduction_0d, 220
refchamp, 221
resoudre, 59
schema_euler_explicite, 310
schema_euler_implicite, 333
schema_euler_implicite_stationnaire, 303
tparoi_vef, 221
transformation, 222
6_points, 146, 295
≤, 43
=, 43
A, 237, 238
a, 357
all_times, 20
amont, 124
analytique, 202, 204
ancien, 169, 170
antisym, 122
arrete, 138–153

avec_energie_cinetique, 179, 180
avec_les_cl, 159, 186, 187, 189, 190, 193–200
avec_sources, 159, 186, 187, 189, 190, 193–200
avec_sources_et_operateurs, 159, 186, 187, 189,
190, 193–200
average, 220, 221
b, 357
binaire, 30, 75, 82, 262
bords, 131
C, 291
C_ext, 238, 241, 242
centre, 124
cf, 357
chakravarthy, 124
Champ_Fonc_Fonction, 192, 193
champ_frontiere, 217
Champ_Uniforme, 192
chsom, 71
composante, 222
concentration, 192, 193
conservation_masse, 290
constant, 290
convertAllToPoly, 22
coriolis_seul, 351, 352
Cotes, 368
d, 357
debit_total, 38, 39
decoup, 259
default, 218
default_bar, 121, 128
dir, 368
distant, 44
divrhout_moins_Tdivrhout, 169, 170
divuT_moins_Tdivu, 169, 170
dt_integr, 79
dt_post, 75, 77
edo, 290
elem, 46, 47, 76, 78, 259, 262
emissivite, 237, 238
entrainement_seul, 351, 352
euclidian_norm, 220, 221
faces, 76, 78
family_names_from_group_names, 22
filtrer_resu, 122, 128
Fluctu_Temperature_ext, 238, 241, 242
flux_bords, 219
Flux_Chaleur_Turb_ext, 238, 241, 242
flux_surfacique_bords, 219
fonction, 262
format_post_sup, 39

formate , 30, 75, 82, 262
 formule , 222
 grad_i , 185, 186
 grad_Ubar , 128
 grav , 71
 gravcl , 71
 hauteur , 368
 homogene , 44
 implicite , 129
 initiale , 202, 204
 integrale_en_z , 38, 39
 K , 358
 k , 253
 K_Eps_ext , 238, 241, 242
 kx , 358
 ky , 358
 kz , 358
 L1_norm , 220, 221
 L2_norm , 220, 221
 last_time , 20, 259, 262
 lata , 39, 40, 51, 69, 70, 80, 81
 lata_v1 , 39, 40, 51, 69, 70, 80, 81
 lata_v2 , 39, 40, 51, 69, 70, 80, 81
 left_value , 220, 221
 lml , 39, 40, 51, 69, 70, 80, 81
 local , 44
 max , 220, 221
 med , 39, 40, 51, 69, 70, 80, 81
 med_major , 69, 70, 80, 81
 min , 220, 221
 minmod , 124
 modifiee , 202, 204
 moins_rho_moyen , 290, 291
 moy_euler , 146, 295
 moyenne , 220, 221
 moyenne_ponderee , 220, 221
 mpi-io , 69, 70, 80, 81
 mu0 , 291
 multiple , 69, 70, 80, 81
 muscl , 124
 nb_pas_dt_post , 75, 77
 no , 209, 218
 nodes , 71
 non , 47, 48, 191, 192, 359
 normalized_euclidian_norm , 220, 221
 norme , 222
 nu , 128
 nu_transp , 128
 nut , 128
 nut_transp , 128
 one_way_coupling , 210
 Origine , 368
 oui , 47, 48, 191, 192, 359
 periode , 71
 plans_paralleles , 146, 295
 post_processing , 82
 postraitement , 82
 postraitement_ft_lata , 82
 postraitement_lata , 82
 produit_scalaire , 222
 que_les_faces_des_elts_dirichlet , 369
 re , 368
 rho_g , 185, 186
 ri , 368
 sans_energie_cinetique , 179, 180
 sans_rien , 159, 186, 187, 189, 190, 193–200
 scotti , 138–153
 short_family_names , 22
 simple , 69, 70, 80, 81
 simplifiee , 202, 204
 single_hdf , 82, 262
 Slambda , 291
 solveur , 129
 som , 46, 47, 71, 76, 78, 259, 262
 somme , 220, 221
 somme_ponderee , 220, 221
 somme_ponderee_porosite , 220, 221
 stabilite , 219
 standard , 290, 291
 suivi , 210
 sum , 220, 221
 superbe , 124
 T0 , 291
 T_ext , 238, 241, 242
 terme_complet , 351, 352
 toutes_les_faces_accrochees , 369
 trace , 217
 transportant_bar , 122
 transporte_bar , 122
 two_way_coupling , 210
 uniforme , 202, 204
 use_existing_domain , 259, 262
 V2_ext , 238, 241, 242
 valeur_a_elem , 202, 203
 valeur_a_gauche , 220, 221
 valeur_normale , 278
 vanalbada , 124
 vanleer , 124
 vdf_lineaire , 202, 203
 vecteur , 222
 vef , 22
 vitesse_interpolee , 210
 vitesse_parois , 253
 vitesse_particules , 210
 vitesse_tangentielle , 281
 volume , 138–153
 volume_sans_lissage , 138–153
 weighted_average , 220, 221

weighted_sum , 220, 221
 weighted_sum_porosity , 220, 221
 X , 43, 58, 368
 x , 357
 xyz , 82, 262
 Y , 43, 58, 368
 y , 357
 Y_ext , 238, 241, 242
 yes , 209, 218
 Z , 43, 58, 368
 z , 357
 , 120, 126, 129, 162
 champs , 70, 81
 conditions_initiales , 119, 133, 134, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 196, 199, 201, 202, 209, 210
 conditions_limites , 88, 119, 133, 134, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 196, 199, 201, 204, 209, 211
 fichier , 51
 nom_zones , 49
 partitionneur , 49
 postraitements , 69, 83–87, 89, 91–99, 101–103, 105–112, 114–116, 118
 postraitements , 69, 83–87, 89, 91–99, 101, 102, 104–111, 113–116, 118
 Read_file , 67
 save_matrice , 227–229, 233
 sondes , 69, 81
 1D , 164, 165
 3D , 164, 165
 a0 , 225
 A_plus , 369
 acceleration , 351
 aire , 361, 362
 alias , 133, 171, 173, 174, 180
 alpha , 20, 21, 122, 359, 371
 alpha_0 , 301
 alpha_1 , 301
 alpha_a , 301
 alpha_sous_zone , 123
 amont_sous_zone , 123
 ampli_bruit , 264
 ampli_sin , 264
 approximation_de_boussinesq , 189
 areva , 166
 ascii , 21, 60
 autre_bord , 236, 237
 autre_champ_indicatrice , 237
 autre_champ_temperature , 236
 autre_champ_temperature_indic0 , 237
 autre_champ_temperature_indic1 , 237
 autre_probleme , 236, 237
 avec_certains_bords , 34
 avec_certains_bords_pour_extraire_surface , 33
 avec_les_bords , 34
 beta , 359
 beta_co , 289, 290
 beta_th , 289, 290
 binaire , 28, 51
 boite , 367
 bord , 26, 162, 353
 bords_a_decouper , 28
 boundaries , 138
 boundary_conditions , 88, 119, 133, 134, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 196, 199, 201, 204, 209, 211
 boundary_xmax , 46
 boundary_xmin , 46
 boundary_ymax , 46
 boundary_ymin , 46
 boundary_zmax , 46
 boundary_zmin , 46
 btd , 125
 c , 166
 c0 , 352
 c1_eps , 351, 365, 366
 c2_eps , 351, 365, 366
 c3_eps , 351, 366
 calc_spectre , 164
 calcul_ldp_en_flux_impose , 373
 canal , 140
 canalx , 151
 cea_jaea , 166
 centre_rotation , 352
 chaleur_latente , 289
 champ_med , 38
 changement_de_base_p1bulle , 257
 check_files , 374
 cl_pression_sommet_faible , 257
 clipping_courbure_interface , 186
 cmu , 155
 coef , 286
 coeff , 353, 358
 coefficient_diffusion , 288
 coefficients_activites , 224
 collisions , 203
 compo , 214, 219
 condition_elements , 32, 34
 condition_faces , 34
 condition_geometrique , 28
 Conduction , 69
 conservation_Ec , 164, 165
 constante_cinetique , 133
 constante_modele_micro_melange , 223
 constante_taux_reaction , 224
 contre_energie_activation , 224

contre_reaction , 224
 contribution_one_way , 210
 controle_residu , 229, 344–349
 convection , 119, 133, 134, 136, 160, 167–170, 172–178, 180–183, 185, 188, 190, 194, 196, 199, 201, 204, 209, 210
 convection_diffusion_chaleur_qc , 108, 109
 convection_diffusion_chaleur_turbulent_qc , 112, 113
 convection_diffusion_concentration , 93, 94, 103, 105
 convection_diffusion_concentration_turbulent , 95, 96, 106, 107
 convection_diffusion_fraction_massique_mb_qc , 97
 convection_diffusion_fraction_massique_mb_turbulent_qc , 98
 convection_diffusion_phase_field , 100
 convection_diffusion_temperature , 102, 103, 105, 110
 Convection_Diffusion_Temperature_Sensibility , 85
 convection_diffusion_temperature_turbulent , 106, 107, 111, 115
 convection_sensibility , 134
 correction_calcul_pression_initiale , 160, 188, 190, 194, 196, 198, 201
 correction_fraction , 285
 correction_matrice_pression , 160, 188, 190, 194, 196, 198, 201
 correction_matrice_projection_initiale , 160, 188, 190, 194, 196, 198, 201
 correction_parcours_thomas , 208
 correction_pression_modifie , 160, 188, 190, 194, 196, 199, 201
 correction_visco_turb_pour_controle_pas_de_temps , 137, 138, 140–142, 144–150, 152–154, 156, 158
 correction_visco_turb_pour_controle_pas_de_temps_parametre , 137, 139, 140, 142–150, 152, 153, 155, 156, 158
 correction_vitesse_modifie , 160, 188, 190, 194, 196, 198, 201
 correction_vitesse_projection_initiale , 160, 188, 190, 194, 196, 198, 201
 correspondance_elements , 283, 284
 corriger_partition , 297
 couplage_NS_CH , 359
 couronne , 367
 Cp , 285
 cp , 246, 247, 258, 285–291
 crank , 131
 critere_absolu , 35
 critere_arete , 207
 critere_longueur_fixe , 207
 critere_remaillage , 207
 cs , 149
 Cv , 285
 cw , 148
 d , 268, 270, 272
 debit , 246, 247, 351
 debit_impose , 353
 debug , 166
 debut_stat , 162
 definition_champs , 69, 80
 delta , 245
 delta_spot , 351
 derivee_rotation , 287
 dh , 246, 247
 diam , 228
 diam_hydr , 355, 356, 372, 374
 diam_hydr_ortho , 355
 diffusion , 119, 133, 134, 136, 160, 167–170, 172–178, 180–183, 185, 188, 190, 194, 196, 199, 201, 204, 209, 210
 diffusion_coef , 285
 diffusion_implicite , 302, 304, 307, 309, 311, 312, 314, 316, 318, 319, 321, 323, 325, 328, 330, 332, 335, 337, 339, 340, 342
 dim_espace_krilov , 229
 dimension_espace_de_krylov , 359
 dir , 246, 247, 358
 dir_flow , 264
 dir_fluct , 272
 dir_wall , 264
 direction , 26, 35–37, 162, 355, 356
 disable_dt_ev , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 331, 333, 335, 337, 339, 341, 343
 disable_progress , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 distance_projete_faces , 204
 dmax , 151
 domain , 45
 domaine , 26, 28, 32–37, 51, 70, 81, 217, 218, 298
 domaine_final , 27, 35
 domaine_flottant_fluide , 189
 domaine_grossier , 28
 domaine_init , 27, 34
 domaines , 51, 299
 domegadt , 352
 dp , 350
 dt_impr , 138, 246, 247, 302, 304, 306, 309, 310, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 335, 337, 338, 340, 342
 dt_impr_moy_spat , 162
 dt_impr_moy_temp , 162

dt_impr_nusselt , 294, 295
 dt_impr_ustar , 137, 139, 140, 142–150, 152, 153, 155, 156, 158
 dt_impr_ustar_mean_only , 137, 139, 140, 142–150, 152, 153, 155, 156, 158
 dt_injection , 211
 dt_max , 302, 304, 306, 308, 310, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 334, 337, 338, 340, 342
 dt_min , 302, 304, 306, 308, 310, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 334, 337, 338, 340, 342
 dt_post , 166
 dt_projection , 160, 187, 190, 194, 196, 198, 200
 dt_sauv , 302, 304, 306, 309, 310, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 334, 337, 338, 340, 342
 dt_start , 303, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 325, 328, 330, 333, 335, 337, 339, 341, 342
 dt_uniforme , 212
 dtol_fraction , 285
 Ec , 163
 Ec_dans_repere_fixe , 163
 echelle_relaxation_coefficient_PDF , 362
 ecrire_decoupage , 49
 ecrire_fichier_xyz_valeur , 119, 133, 135, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 197, 199, 201, 204, 209, 211
 ecrire_fichier_xyz_valeur_bin , 119, 133, 135, 136, 161, 167–169, 171–177, 179–182, 184, 185, 188, 191, 195, 197, 199, 201, 205, 209, 211
 ecrire_frontiere , 51
 ecrire_lata , 49
 elements_fluides , 283
 elements_solides , 283, 284
 emissivite_pour_rayonnement_entre_deux_plaques_quasi_infinies , 247
 energie_activation , 224
 ensemble_points , 211
 enthalpie_reaction , 224
 epaisseur , 33, 35
 eps_max , 154, 156, 158
 eps_min , 154, 155, 158
 eq_rayo_semi_transp , 87
 equation_frequence_resolue , 132
 equation_interface , 132, 173, 182
 equation_interfaces_proprietes_fluide , 186
 equation_interfaces_vitesse_imposee , 186
 equation_navier_stokes , 182
 equation_non_resolue , 119, 132, 133, 135, 137, 161, 168–173, 175–181, 183–185, 188, 191, 195, 197, 199, 201, 205, 209, 211
 equation_nu_t , 133
 equation_temperature_mpoint , 187
 equation_temperature_mpoint_vapeur , 187
 equations_interfaces_vitesse_imposee , 186
 equations_scalaires_passifs , 89, 94, 96, 105, 107, 109, 110, 114, 115
 equations_source_chimie , 133
 Erugu , 369
 erugu , 254
 espece , 177, 178
 espece_en_competition_micro_melange , 223
 est_dirichlet , 283, 284
 eta , 362
 expert_only , 67
 exposant_beta , 224
 expression , 223
 facon_init , 164
 facsec , 302, 304, 306, 309, 310, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 335, 337, 339, 340, 342
 facsec_max , 306, 308, 324, 327, 329, 331, 334
 facteur , 125, 371, 375
 facteur_longueur_ideale , 207
 facteurs , 41
 fichier , 70, 81, 151, 297, 298, 367
 fichier_distance_paroie , 156, 157
 fichier_ecriture_K_Eps , 151
 fichier_matrice , 60
 fichier_post , 26
 fichier_secmem , 60
 fichier_solution , 60
 fichier_solveur , 60
 fichier_solveur_non_recree , 229
 fichier_sortie , 39
 fichier_ssz , 298
 fields , 70, 81
 file , 51
 file_coord_x , 45
 file_coord_y , 45
 file_coord_z , 46
 filling , 300
 fin_stat , 162
 flow_rate , 281
 fluide0 , 288
 fluide1 , 288
 fonction , 57, 150
 fonction_filtre , 47
 fonction_sous_zone , 367
 force , 228
 format , 51, 70, 81
 format_post , 47
 forme_du_terme_source , 364

formulation_a_nb_points , 138, 140–145, 147–151, 153
 formule_mu , 289
 frequence_recalc , 229
 frontiere , 166
 function_coord_x , 45
 function_coord_y , 45
 function_coord_z , 45
 gamma , 285, 374
 genere_fichier_solveur , 60
 ghost_thickness , 45
 gmres_non_lineaire , 359
 gnuplot_header , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 331, 333, 335, 337, 339, 341, 343
 gradient_pression_qdm_modifie , 160, 188, 190, 194, 196, 198, 201
 gravite , 189
 groupes , 87, 90, 117
 h , 264, 353
 haspi , 166
 hexa_old , 35
 himp , 367
 i , 270
 ignore_check_fraction , 285
 implication_CH , 359
 implicite , 210
 impr , 60, 207, 226–229, 233
 impr_diffusion_implicite , 302, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 325, 328, 330, 333, 335, 337, 339, 341, 342
 indic_faces_modifiee , 204
 indice , 289–291
 info , 127
 init_Ec , 164
 initial_conditions , 119, 133, 134, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 196, 199, 201, 202, 209, 210
 initial_value , 265, 273
 injecteur_interfaces , 204
 injection , 210
 integrale , 351
 interfaces , 70, 81
 interpolation , 361, 363
 interpolation_champ_face , 204
 interpolation_repere_local , 204
 intervalle , 367
 inverse_condition_element , 33
 iterations_correction_volume , 203
 joints_non_postraites , 51
 k , 290
 k_min , 154, 156, 158
 kappa , 289–291, 359, 369, 371
 kappa_variable , 359
 kmetis , 297
 lambda , 246, 247, 287–291, 355, 356, 363, 371
 lambda_c , 372
 lambda_max , 363
 lambda_min , 363
 lambda_ortho , 355
 larg_joint , 49
 lenghtScale , 271
 Lire_fichier , 67
 lissage_courbure_coeff , 207
 lissage_courbure_iterations , 207
 lissage_courbure_iterations_si_remaillage , 207
 lissage_courbure_iterations_systematique , 207
 liste , 57, 367
 liste_cas , 31
 liste_de_postraitements , 69, 83–87, 89, 91–99, 101, 102, 104–110, 112–116, 118
 liste_postraitements , 69, 83–86, 88, 89, 91–99, 101–109, 111–115, 117, 118
 local , 362
 localisation , 47, 218, 223
 loi_etat , 290
 longueur_boite , 164, 165
 longueur_maille , 138, 140–145, 147–150, 152, 153
 longueurs , 41
 maillage , 203
 main , 50
 maintien_temperature , 182
 masse_molaire , 133, 171, 173, 174, 180, 258
 matrice_pression_invariante , 187
 max_iter_implicite , 304, 325, 327, 329, 332, 334, 336
 methode , 39, 217, 218, 220, 222
 methode_calcul_face_keps_impose , 369
 methode_calcul_pression_initiale , 159, 187, 189, 193, 196, 198, 200
 methode_couplage , 210
 methode_interpolation_v , 203
 methode_transport , 203, 210
 min_critere_q_sur_max_critere_q , 167
 min_dir_flow , 264
 min_dir_wall , 264
 mode_calcul_convection , 169, 170
 modele , 361, 363
 modele_cinetique , 133
 modele_fonc_bas_reynolds , 155
 modele_fonc_realisable , 158
 modele_micro_melange , 223
 modele_turbulence , 133, 136, 170, 174, 176, 178, 183, 187, 198, 200
 modele_visco , 371, 375
 modif_div_face_dirichlet , 257
 molar_mass1 , 284

molar_mass2 , 285
 moyenne , 271
 moyenne_convergee , 219
 moyenne_de_kappa , 359
 mpoint_inactif_sur_qdm , 187
 mpoint_vapeur_inactif_sur_qdm , 187
 mu , 246, 247, 258, 289–291, 371
 mu1 , 285
 mu2 , 285
 mu_1 , 179, 192
 mu_2 , 179, 192
 mu_fonc_c , 192
 multiplicateur_de_kappa , 359
 n , 247, 290, 371, 374, 375
 n_iterations_distance , 203
 n_iterations_interpolation_ibc , 204
 name_of_initial_zones , 21
 name_of_new_zones , 21
 navier_stokes_phase_field , 100
 navier_stokes_qc , 97, 108, 109
 navier_stokes_standard , 85, 91, 93, 94, 102–104, 110
 navier_stokes_standard_ALE , 92
 Navier_Stokes_standard_sensibility , 84, 85
 navier_stokes_turbulent , 95, 96, 99, 106, 107, 111, 115
 Navier_Stokes_Turbulent_ALE , 83
 navier_stokes_turbulent_qc , 98, 112, 113
 nb_comp , 265, 273, 375
 nb_corrections_max , 343–347, 349
 nb_it_max , 227, 228, 233, 344–349
 nb_iter_barycentrage , 206
 nb_iter_correction_volume , 207
 nb_iter_remaillage , 206
 nb_iteration_max_uzawa , 204
 nb_iterations , 210
 nb_iterations_gmresnl , 359
 nb_mailles_mini , 167
 nb_nodes , 45
 nb_parts , 296–299
 nb_parts_geom , 28
 nb_parts_naif , 28
 nb_parts_tot , 49
 nb_pas_dt_max , 303, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 nb_points , 146, 295
 nb_points_par_phase , 163
 nb_procs , 31
 nb_test , 60
 nb_tranche , 39
 nb_tranches , 35–37
 nb_var , 150
 nbModes , 271
 new_jacobian , 127
 niter_avg , 306, 308
 niter_max , 306, 308
 niter_max_diffusion_implicit , 131, 303, 305, 307, 309, 311, 313, 314, 316, 318, 320, 322, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 niter_min , 306, 308
 no_check_disk_space , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 no_conv_subiteration_diffusion_implicit , 302, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 325, 328, 330, 333, 335, 337, 339, 341, 342
 no_error_if_not_converged_diffusion_implicit , 302, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 325, 328, 330, 333, 335, 337, 339, 341, 342
 no_qdm , 344–349
 nom , 265, 273
 nom_bord , 35
 nom_cl_derriere , 37
 nom_cl_devant , 37
 nom_domaine , 46
 nom_fichier , 366
 nom_fichier_post , 46
 nom_fichier_solveur , 229
 nom_fichier_sortie , 28
 nom_frontiere , 217
 nom_inconnue , 133, 171, 173, 174, 180
 nom_mon_indicatrice , 236
 nom_pb , 46
 nom_source , 213–223
 nombre_de_noeuds , 41
 nombre_facettes_retenues_par_cellule , 204
 noms_champs , 46
 normal_value , 272
 normalise , 167
 nu , 127, 246, 247
 nu_transp , 127
 numero , 219, 223
 numero_op , 214
 numero_source , 214
 nusselt , 374
 nut , 127
 nut_max , 137, 139, 140, 142–149, 151–153, 155, 156, 159
 nut_transp , 128
 old , 123
 omega , 264, 301, 306, 352
 omega_relaxation_drho_dt , 291
 optimisation_sous_maillage , 218
 optimized , 227, 233

option , 133, 173, 219, 352
 Origine , 41
 origine , 33
 p , 271
 p0 , 257
 p1 , 257
 p_imposee_aux_faces , 48
 pa , 257
 par_sous_zone , 27
 parallele , 70, 81
 parametre_equation , 119, 133, 135, 137, 161, 168, 170–173, 175–181, 183–185, 188, 191, 195, 197, 199, 201, 205, 209, 211
 parcours_interface , 204
 Partition_tool , 49
 pas , 206
 pas_de_solution_initiale , 60
 pas_lissage , 206
 pb_champ , 220, 221
 pb_name , 50
 penalisation_forcage , 187
 penalisation_l2_ftd , 134, 181, 182
 perio_x , 45
 perio_y , 45
 perio_z , 45
 periode , 163
 periode_calc_spectre , 164, 165
 periode_sauvegarde_securite_en_heures , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 periodique , 49
 phase , 133, 173, 182, 236
 phase_marquee , 210
 point1 , 33
 point2 , 33
 point3 , 33
 points_fluides , 282, 283
 points_solides , 283, 284
 polynomes , 367
 position , 287
 Post_processing , 69, 83–87, 89, 91–99, 101–103, 105–112, 114–116, 118
 Post_processings , 69, 83–87, 89, 91–99, 101, 102, 104–111, 113–116, 118
 postraiter_gradient_pression_sans_masse , 160, 188, 190, 194, 196, 199, 201
 potentiel_chimique , 360
 potentiel_chimique_generalise , 179
 prandtl_turbulent_fonction_nu_t_alpha , 294
 Prandtl , 286
 prandtl , 285, 286, 375
 prandtl_eps , 154, 155, 158
 prandtl_k , 154, 155, 158
 prdt , 294
 prdt_sur_kappa , 373
 precision_impr , 303, 305, 307, 309, 311, 313, 315, 316, 318, 320, 322, 323, 326, 328, 330, 333, 335, 337, 339, 341, 343
 precondition , 227, 228, 233
 precondition0 , 301
 precondition1 , 301
 precondition_nul , 227, 233
 preconda , 301
 preconditionnement_diag , 131
 pression , 290
 pression_reference , 189
 print_more_infos , 49
 Probes , 69, 81
 probleme , 32–34, 265, 273
 produits , 224
 projection_initiale , 160, 187, 190, 194, 196, 198, 200
 projection_normale_bord , 35
 proprietes_particules , 211
 pulsation_w , 162
 quiet , 154, 156, 158, 226–229, 233
 rayon_spot , 351
 reactifs , 224
 reactions , 223
 rectangle , 367
 regul , 358
 relax_barycentrage , 206
 relax_pression , 347, 349
 remaillage , 203
 reorder , 49
 reprise , 69, 83–86, 88, 90–96, 98–108, 110–115, 117, 118, 163
 reprise_correlation , 246, 247
 residu_max_gmresnl , 360
 residu_min_gmresnl , 360
 resolution_explicite , 132
 restart , 371
 restriction , 367
 resume_last_time , 69, 83–86, 88, 90–95, 97–107, 109–115, 117, 118
 reynolds_stress_isotrope , 156, 157
 rho , 246, 247, 287–291
 rho_1 , 179, 191
 rho_2 , 179, 191
 rho_constant_pour_debug , 286
 rho_fonc_c , 191
 rho_t , 286
 rho_xyz , 286
 rotation , 287, 361, 362
 rt , 257
 sans_passer_par_le2d , 35
 sans_solveur_masse , 214

sans_source_boussinesq , 371
 sauvegarde , 69, 83–86, 88, 89, 91–99, 101–109, 111–115, 117, 118
 sauvegarde_simple , 69, 83–86, 88, 90–97, 99–108, 110–115, 117, 118
 save_matrix , 227–229, 233
 sc , 285
 schema_ch , 338
 schema_ns , 338
 scturb , 295
 segment , 367
 senseur_interface , 351
 seuil , 227–229, 233, 306, 308
 seuil_convergence_implicit , 132, 343–349
 seuil_convergence_solveur , 132, 344–349
 seuil_convergence_uzawa , 204
 seuil_cv_iterations_ptfixe , 359
 seuil_diffusion_implicit , 131, 302, 305, 307, 309, 311, 313, 314, 316, 318, 320, 321, 323, 325, 328, 330, 332, 335, 337, 339, 341, 342
 seuil_divU , 160, 187, 190, 194, 196, 198, 200
 seuil_dvolume_residuel , 207
 seuil_generation_solveur , 344–349
 seuil_residu_gmresnl , 359
 seuil_residu_ptfixe , 359
 seuil_statio , 302, 304, 307, 309, 311, 312, 314, 316, 317, 319, 321, 323, 325, 327, 330, 332, 335, 337, 339, 340, 342
 seuil_statio_relatif_deconseille , 302, 304, 307, 309, 311, 312, 314, 316, 318, 319, 321, 323, 325, 328, 330, 332, 335, 337, 339, 340, 342
 seuil_test_preliminaire_solveur , 344–349
 seuil_verification , 60
 seuil_verification_solveur , 344–349
 sigma , 288
 single_hdf , 21, 49
 solv_elem , 228
 solveur , 60, 88, 131, 132, 304, 325, 327, 329, 332, 334, 336, 344–349
 solveur0 , 227
 solveur1 , 227
 solveur_bar , 160, 187, 190, 194, 196, 198, 200
 solveur_pression , 160, 187, 190, 194, 196, 198, 200
 sonde_tble , 371, 375
 source , 213–223
 source_reference , 213–223
 sources , 119, 133, 134, 136, 160, 167–170, 172–178, 180–182, 184, 185, 188, 190, 194, 196, 199, 201, 204, 209, 211, 213–223
 sources_reference , 213–223
 sous_zone , 32, 265, 273, 355, 356
 sous_zones , 299
 splitting , 45
 stabilise , 146, 295
 standard , 127
 state , 159
 stationnaire , 371
 statistiques , 70, 81
 statistiques_en_serie , 70, 81
 stats , 371, 374, 375
 steady_global_dt , 304
 steady_security_facteur , 304
 stencil_width , 182
 surface , 247, 350, 358
 surfacique , 51
 sutherland , 290
 symx , 41
 symy , 41
 symz , 41
 t0 , 352
 t_deb , 166, 215, 216, 219
 t_debut_injection , 211
 t_fin , 166, 215, 216, 219
 tcpumax , 302, 304, 306, 308, 310, 312, 314, 315, 317, 319, 321, 322, 325, 327, 330, 332, 334, 337, 338, 340, 342
 tdivu , 123
 temperature , 285
 temperature_state , 134
 temps_d_affichage , 359
 temps_debut_prise_en_compte_drho_dt , 291
 temps_relaxation_coefficient_PDF , 362
 terme_gravite , 186
 test , 123
 Text , 367
 thermique_monolithique , 334
 thi , 140
 timeScale , 272
 tinf , 246, 247
 tinit , 302, 304, 306, 308, 310, 312, 314, 315, 317, 319, 321, 322, 325, 327, 330, 332, 334, 336, 338, 340, 342
 tmax , 302, 304, 306, 308, 310, 312, 314, 315, 317, 319, 321, 322, 325, 327, 330, 332, 334, 336, 338, 340, 342
 traitement_coins , 48
 traitement_particulier , 160, 187, 190, 194, 196, 198, 200
 traitement_pth , 290
 traitement_rho_gravite , 291
 tranches , 299
 transformation_bulles , 210
 transport_k_epsilon , 155
 transport_k_epsilon_realisable , 158
 transpose_rotation , 361, 363

triangle , 33
 trois_tetra , 35
 tsup , 246, 247
 tube , 367
 turbKinEn , 271
 turbulence_paroï , 137, 139, 140, 142–150, 152, 153, 155, 156, 158, 293–295
 tuyauz , 151
 type , 219, 300
 type_vitesse_imposee , 204
 u , 268, 270, 272
 u_star_impose , 369
 u_tau , 372
 ubar_umprim_cible , 363
 ucent , 264
 uncertain_variable , 134, 159
 union , 367
 use_weights , 297
 val_Ec , 164
 velocity_profil , 281
 velocity_state , 134
 verif_boussinesq , 352
 verif_dparoi , 151
 via_extraire_surface , 33
 vingt_tetra , 35
 viscosite_dynamique_constante , 189
 vitesse , 287, 351
 vitesse_fluide_explicite , 208
 vitesse_imposee_data , 362
 vitesse_imposee_fonction , 362
 vitesse_imposee_regularisee , 204
 volume , 246
 volume_impose_phase_1 , 203
 volumes_etendus , 123
 volumes_non_etendus , 123
 volumique , 51
 with_nu , 209
 xinf , 247
 xsup , 247
 xtanh , 42
 xtanh_dilatation , 42
 xtanh_taille_premiere_maille , 42
 ytanh , 42
 ytanh_dilatation , 42
 ytanh_taille_premiere_maille , 42
 zmax , 39
 zmin , 39
 zones_name , 49
 ztanh , 42
 ztanh_dilatation , 42
 ztanh_taille_premiere_maille , 42

acceleration, 351
 ale, 125

algo_base, 211
 algo_couple_1, 212
 amgx, 225
 amount, 120
 amount_old, 120
 analyse_angle, 23
 associate, 23
 associer_algo, 23
 associer_pbmg_pbfm, 24
 associer_pbmg_pbgglobal, 24
 axi, 24

 base, 208
 bidim_axi, 24
 bord, 42
 bord_base, 42
 boundary_field_inward, 272
 Boundary_field_keps_from_ud, 269
 boundary_field_uniform_keps_from_ud, 272
 boussinesq_concentration, 352
 boussinesq_temperature, 352
 brech, 165
 btd, 125

 calcul, 25
 calculer_moments, 25
 canal, 162
 canal_perio, 353
 ceg, 165
 centre, 120
 centre4, 120
 centre_de_gravite, 25
 centre_old, 121
 ch_front_input, 272
 Ch_front_input_ALE, 270
 ch_front_input_uniforme, 273
 champ_base, 258
 champ_don_base, 260
 champ_don_lu, 260
 champ_fonc_fonction, 260
 champ_fonc_fonction_txyz, 261
 champ_fonc_fonction_txyz_morceaux, 261
 champ_fonc_med, 261
 Champ_Fonc_MED_Tabule, 258
 Champ_Fonc_MEDfile, 259
 champ_fonc_reprise, 262
 champ_fonc_t, 262
 champ_fonc_tabule, 263
 champ_fonc_txyz, 267
 champ_fonc_xyz, 267
 Champ_front_ale, 270
 champ_front_base, 269
 champ_front_bruite, 273
 champ_front_calc, 274

champ_front_contact_rayo_semi_transp_vef, 274
 champ_front_contact_rayo_transp_vef, 275
 champ_front_contact_vef, 275
 champ_front_debit, 275
 champ_front_debit_massique, 275
 Champ_front_debit_QC_VDF, 270
 Champ_front_debit_QC_VDF_fonc_t, 270
 champ_front_fonc_pois_ipsn, 276
 champ_front_fonc_pois_tube, 276
 champ_front_fonc_t, 276
 champ_front_fonc_txyz, 276
 champ_front_fonc_xyz, 277
 champ_front_fonction, 277
 champ_front_lu, 277
 champ_front_MED, 273
 champ_front_normal_vef, 277
 champ_front_pression_from_u, 278
 champ_front_recyclage, 278
 Champ_front_synt, 271
 champ_front_tabule, 280
 champ_front_tangentiel_vef, 280
 champ_front_uniforme, 281
 champ_front_vortex, 281
 champ_front_xyz_debit, 281
 champ_front_zoom, 281
 champ_generique_base, 212
 champ_init_canal_sinal, 263
 champ_input_base, 264
 champ_input_p0, 265
 champ_ostwald, 265
 champ_post_de_champs_post, 212
 champ_post_extraction, 216
 champ_post_interpolation, 218
 champ_post_morceau_equation, 218
 champ_post_operateur_base, 213
 champ_post_operateur_divergence, 215
 champ_post_operateur_eqn, 214
 champ_post_operateur_gradient, 217
 champ_post_reduction_0d, 220
 champ_post_refchamp, 221
 champ_post_statistiques_base, 214
 champ_post_tparoi_vef, 221
 champ_post_transformation, 222
 champ_som_lu_vdf, 265
 champ_som_lu_vef, 266
 Champ_Tabule_Morceaux, 259
 champ_tabule_temps, 266
 champ_uniforme_morceaux, 266
 champ_uniforme_morceaux_tabule_temps, 267
 Champ_front_fonc_txyz, 17
 chimie, 223
 chmoy_faceperio, 165
 Cholesky, 230, 231
 cholesky, 225
 circle, 73
 circle_3, 74
 class_generic, 224
 combinaison, 149
 Concentration, 76, 79
 condlim_base, 234
 condlims, 88
 Conduction, 118
 constant, 253
 constituant, 288
 contact_vdf_vef, 235
 contact_vef_vdf, 235
 convection_deriv, 120
 convection_diffusion_chaleur_qc, 169
 convection_diffusion_chaleur_turbulent_qc, 170
 convection_diffusion_concentration, 171
 convection_diffusion_concentration_ft_disc, 172
 convection_diffusion_concentration_turbulent, 173
 Convection_Diffusion_Concentration_Turbulent_FT-Disc, 132
 convection_diffusion_fraction_massique_mb_qc, 175
 convection_diffusion_fraction_massique_mb_turbulent_qc, 176
 convection_diffusion_fraction_massique_qc, 177
 convection_diffusion_fraction_massique_turbulent_qc, 178
 convection_diffusion_phase_field, 179
 convection_diffusion_temperature, 180
 convection_diffusion_temperature_ft_disc, 181
 Convection_Diffusion_Temperature_sensibility, 134
 convection_diffusion_temperature_turbulent, 183
 coriolis, 353
 Correlation, 76
 correlation, 78, 215
 corriger_frontiere_periodique, 26
 covimac, 256
 create_domain_from_sous_zone, 26
 darcy, 353
 debug, 27
 decoupebord, 27
 decouper_bord_coincident, 28
 di_I2, 121
 diffusion_deriv, 126
 dilate, 28
 dimension, 29
 dirac, 354
 dirichlet, 235
 disable_TU, 29
 discretisation_base, 256
 discretiser_domaine, 29
 discretize, 29
 distance_parois, 30
 domain, 44

domaine, 258
 domaine_ale, 258
 DP_Impose, 350
 dt_calc, 226
 dt_fixe, 226
 dt_min, 226
 dt_start, 226
 Dt_post, 76

 EASM_Baglietto, 157
 ec, 163
 ecart_type, 78, 216
 Ecart_type, 76, 79
 echange_contact_rayo_transp_vdf, 235
 echange_contact_vdf_ft_disc, 236
 echange_contact_vdf_ft_disc_solid, 236
 ecrire, 67
 ecrire_champ_med, 30
 ecrire_fichier_bin, 67
 ecrire_fichier_formatte, 30
 ecrire_med, 67
 ecrire_medfile, 68
 ecriturelecturespecial, 30
 ef, 121, 256
 ef_stab, 122
 end, 37
 entree_temperature_imposee_h, 237
 epsilon, 44
 eqn_base, 184
 execute_parallel, 31
 export, 31
 extract_2d_from_3d, 31
 extract_2daxi_from_3d, 32
 extraire_domaine, 32
 extraire_plan, 32
 extraire_surface, 33
 extrudebord, 34
 extrudeparoi, 35
 extruder, 35
 extruder_en20, 36
 extruder_en3, 36

 fichier_decoupage, 296
 field_uniform_keps_from_ud, 267
 flottabilite, 360
 fluide_diphasique, 288
 fluide_incompressible, 289
 fluide_ostwald, 289
 fluide_quasi_compressible, 290
 flux_radiatif, 237
 flux_radiatif_vdf, 237
 flux_radiatif_vef, 238
 forchheimer, 354
 frontiere_ouverte, 238
 frontiere_ouverte_concentration_imposee, 238
 frontiere_ouverte_fraction_massique_imposee, 238
 frontiere_ouverte_gradient_pression_impose, 239
 frontiere_ouverte_gradient_pression_impose_vefprep1b, 239
 frontiere_ouverte_gradient_pression_libre_vef, 239
 frontiere_ouverte_gradient_pression_libre_vefprep1b, 239
 frontiere_ouverte_k_eps_impose, 240
 frontiere_ouverte_pression_imposee, 240
 frontiere_ouverte_pression_imposee_orlansky, 240
 frontiere_ouverte_pression_moyenne_imposee, 240
 frontiere_ouverte_rayo_semi_transp, 241
 frontiere_ouverte_rayo_transp, 241
 frontiere_ouverte_rayo_transp_vdf, 241
 frontiere_ouverte_rayo_transp_vef, 241
 frontiere_ouverte_rho_u_impose, 242
 frontiere_ouverte_temperature_imposee, 242
 frontiere_ouverte_temperature_imposee_rayo_semi-transp, 242
 frontiere_ouverte_temperature_imposee_rayo_transp, 242
 frontiere_ouverte_vitesse_imposee, 243
 frontiere_ouverte_vitesse_imposee_sortie, 243

 gaz_parfait, 285
 gaz_reel_rhot, 284
 GCP, 229, 232
 gcp, 233
 gcp_ns, 226
 gen, 227
 generic, 123
 gmres, 228
 Gradient, 230

 IBICGSTAB, 230
 ibm_aucune, 282
 ibm_element_fluide, 282
 ibm_gradient_moyen, 283
 ibm_hybride, 283
 ilu, 300
 implicit_euler_steady_scheme, 303
 implicit_steady, 343
 implicite, 344
 implicite_ALE, 345
 imposer_vit_bords_ale, 37
 imprimer_flux, 37
 imprimer_flux_sum, 38
 init_par_partie, 268
 integrer_champ_med, 38
 Interface, 231
 internes, 44
 interpolation_champ_face_deriv, 208
 interpolation_ibm_base, 282

interprete, 19
interprete_geometrique_base, 39

Jones_Launders, 157

k_epsilon, 155
K_Epsilon_Realisable, 157
kquick, 124

Lam_Bremhorst, 156
lata_to_med, 39
lata_to_other, 39
Launders_Sharma, 157
leap_frog, 311
lineaire, 208
lire_ideas, 40
lire_medfile, 22
lire_tgrid, 54
list_bloc_mailler, 40
list_bord, 42
list_nom, 59
list_nom_virgule, 213
liste_post, 81
liste_post_ok, 79
listobj, 376
listobj_impl, 376
local, 231
loi_analytique_scalaire, 373
loi_ciofalo_hydr, 369
loi_etat_base, 284
loi_expert_hydr, 369
loi_expert_scalaire, 373
loi_fermeture_base, 286
loi_fermeture_test, 286
loi_horaire, 205, 287
loi_odvm, 373
loi_paroι_nu_impose, 374
loi_puissance_hydr, 369
loi_standard_hydr, 370
loi_standard_hydr_old, 370
loi_standard_hydr_scalaire, 374
loi_ww_hydr, 370
loi_WW_scalaire, 373
longitudinale, 357
longueur_melange, 151

mailler, 40
mailler_base, 40
maillerparallel, 45
masse_ajoutee, 361
melange_binaire, 284
melange_gaz_parfait, 285
Merge_MED, 19
methode_transport_deriv, 205

metis, 297
milieu_base, 287
milieu_v2_base, 291
mod_turb_hyd_rans, 154
mod_turb_hyd_ss_maille, 138
Modele_Fonc_Realisable, 224
Modele_Fonc_Realisable_base, 224
modele_fonction_bas_reynolds_base, 156
modele_rayo_semi_transp, 87
modele_rayonnement_base, 292
modele_rayonnement_milieu_transparent, 292
Modele_Shih_Zhu_Lumley_VDF, 224
modele_turbulence_hyd_deriv, 137
modele_turbulence_scal_base, 293
modif_bord_to_raccord, 46
mor_eqn, 118
Moyenne, 76, 79
moyenne, 77, 219
moyenne_volumique, 46
MultipleFiles, 20
muscl, 124
muscl3, 122
muscl_new, 124
muscl_old, 124

N, 231
navier_stokes_ft_disc, 185
navier_stokes_phase_field, 189
navier_stokes_qc, 193
navier_stokes_standard, 195
Navier_Stokes_standard_sensibility, 159
Navier_Stokes_std_ALE, 167
navier_stokes_turbulent, 197
Navier_Stokes_Turbulent_ALE, 136
navier_stokes_turbulent_qc, 199
negligeable, 124, 126, 370
negligeable_scalaire, 374
nettoiepasnoeuds, 47
neumann, 243
Neumann_homogene, 234
Neumann_paroι_adiabatique, 234
nom, 296
NUL, 153
NULL, 231
numero_elem_sur_maitre, 72

objet_lecture, 376
Op_Conv_EF_Stab_CoviMAC_Face, 20
Op_Conv_EF_Stab_PolyMAC_Face, 20
optimal, 229
option, 128
option_vdf, 47
orientefacesbord, 48
orienter_simplexes, 55

plb, 127
 plncplb, 127
 parametre_diffusion_implicite, 131
 parametre_equation_base, 131
 parametre_implicite, 131
 Paroi, 235
 paroi_adiabatique, 243
 paroi_contact, 244
 paroi_contact_fictif, 244
 paroi_decallee_robin, 245
 paroi_defilante, 245
 paroi_echange_contact_correlation_vdf, 245
 paroi_echange_contact_correlation_vef, 246
 paroi_echange_contact_odvm_vdf, 247
 paroi_echange_contact_rayo_semi_transp_vdf, 247
 paroi_echange_contact_vdf, 248
 paroi_echange_contact_vdf_ft, 248
 paroi_echange_contact_vdf_zoom_fin, 249
 paroi_echange_contact_vdf_zoom_grossier, 249
 paroi_echange_externe_impose, 249
 paroi_echange_externe_impose_h, 250
 paroi_echange_externe_impose_rayo_semi_transp, 250
 paroi_echange_externe_impose_rayo_transp, 250
 paroi_echange_global_impose, 250
 paroi_fixe, 251
 paroi_fixe_iso_Genepi2_sans_contribution_aux_vitesse, 251
 _sommets, 251
 paroi_flux_impose, 251
 paroi_flux_impose_rayo_semi_transp_vdf, 251
 paroi_flux_impose_rayo_semi_transp_vef, 252
 paroi_flux_impose_rayo_transp, 252
 paroi_ft_disc, 252
 paroi_ft_disc_deriv, 252
 paroi_knudsen_non_negligeable, 253
 paroi_rugueuse, 253
 paroi_tble, 370
 paroi_tble_scal, 375
 paroi_temperature_imposee, 254
 paroi_temperature_imposee_rayo_semi_transp, 254
 paroi_temperature_imposee_rayo_transp, 254
 partition, 48, 297
 partitionneur_deriv, 296
 pave, 40
 pb_avec_passif, 89
 Pb_base, 85
 Pb_Conduction, 68
 pb_couple_rayo_semi_transp, 90
 pb_couple_rayonnement, 117
 pb_gen_base, 68
 pb_hydraulique, 90
 pb_hydraulique_ALE, 91
 pb_hydraulique_concentration, 92
 pb_hydraulique_concentration_scalaires_passifs, 93
 pb_hydraulique_concentration_turbulent, 94
 pb_hydraulique_concentration_turbulent_scalaires_passifs, 95
 pb_hydraulique_melange_binaire_qc, 97
 pb_hydraulique_melange_binaire_turbulent_qc, 98
 Pb_Hydraulique_sensibility, 83
 pb_hydraulique_turbulent, 99
 Pb_Hydraulique_Turbulent_ALE, 82
 pb_mg, 100
 pb_phase_field, 100
 pb_thermohydraulique, 102
 pb_thermohydraulique_concentration, 103
 pb_thermohydraulique_concentration_scalaires_passifs, 104
 pb_thermohydraulique_concentration_turbulent, 105
 pb_thermohydraulique_concentration_turbulent_scalaires_passifs, 106
 pb_thermohydraulique_qc, 108
 pb_thermohydraulique_qc_fraction_massique, 109
 pb_thermohydraulique_scalaires_passifs, 110
 Pb_Thermohydraulique_sensibility, 84
 pb_thermohydraulique_turbulent, 111
 pb_thermohydraulique_turbulent_qc, 112
 pb_thermohydraulique_turbulent_qc_fraction_massique, 113
 pb_thermohydraulique_turbulent_scalaires_passifs, 114
 pb_med, 115
 periodique, 254
 perte_charge_anisotrope, 354
 perte_charge_circulaire, 355
 perte_charge_directionnelle, 355
 perte_charge_isotrope, 356
 perte_charge_reguliere, 356
 perte_charge_singuliere, 357
 Petsc, 229, 231, 232
 petsc, 229
 pilote_icoco, 49
 piso, 346
 plan, 73
 point, 72
 points, 71
 polyedriser, 50
 polymac, 256
 porosites, 50
 porosites_champ, 51
 position_like, 72
 post_processing, 80
 post_processings, 79
 postraitement_base, 80
 postraitement_ft_lata, 81
 postraiter_domaine, 51
 pp, 135
 prandtl, 294
 precisiongeom, 51
 Precond, 229, 231

precondsolv, 300
predefini, 220
Pression, 76, 79
Print, 231
problem_read_generic, 116
probleme_couple, 86
probleme_ft_disc_gen, 117
profils_thermo, 165
puissance_thermique, 358

quick, 125

raccord, 43
radioactive_decay, 358
raffiner_anisotrope, 52
raffiner_isotrope, 52
Raffiner_isotrope_parallele, 21
read, 53
read_file, 54
read_file_binary, 54
read_med, 21
read_unsupported_ascii_file_from_icem, 54
redresser_hexaedres_vdf, 55
refine_mesh, 55
regroupebord, 55
remove_elem, 56
remove_invalid_internal_boundaries, 57
reordonner, 57
reorienter_tetraedres, 57
reorienter_triangles, 57
rho_T, 286
rk3_ft, 313
rotation, 58
RT, 126
runge_kutta_ordre_3, 315
runge_kutta_ordre_4_d3p, 317
runge_kutta_rationnel_ordre_2, 318

scalaire_impose_paro, 255
scatter, 58
scattermed, 58
Sch_CN_EX_iteratif, 305
Sch_CN_iteratif, 307
schema_adams_bashforth_order_2, 320
schema_adams_bashforth_order_3, 322
schema_adams_moulton_order_2, 324
schema_adams_moulton_order_3, 326
schema_backward_differentiation_order_2, 328
schema_backward_differentiation_order_3, 331
schema_euler_explicite_ALE, 341
schema_implicite_base, 335
schema_phase_field, 338
schema_predictor_corrector, 339

schema_temps_base, 301
scheme_euler_explicit, 309
scheme_euler_implicit, 333
schmidt, 294
segment, 73
segmentfacesx, 74
segmentfacesy, 74
segmentfacesz, 75
segmentpoints, 72
sensibility, 126
Shih_Zhu_Lumley, 225
simple, 347
simpler, 347
Solide, 287
solve, 59
Solver, 229, 232
Solver_moving_mesh_ALE, 22
Solveur, 229, 231
solveur_implicite_base, 343
solveur_lineaire_std, 348
solveur_sys_base, 234
solveur_u_p, 349
Solveur_pression, 229, 231
sonde_base, 71
sortie_libre_rho_variable, 255
sortie_libre_temperature_imposee_h, 255
source_base, 350
source_con_phase_field, 358
source_constituant, 360
Source_Constituant_Vortex, 350
source_generique, 360
source_pdf, 361
source_pdf_base, 362
source_qdm, 363
source_qdm_lambdaup, 363
source_qdm_phase_field, 363
source_rayo_semi_transp, 364
source_robin, 364
source_robin_scalaire, 364
source_th_tdivu, 364
source_transport_k_eps, 365
source_transport_k_eps_aniso_concen, 365
source_transport_k_eps_aniso_therm_concen, 366
Source_Transport_K_Eps_anisotherme, 351
sources, 130
sous_domaine, 298
sous_maille, 152
sous_maille_1elt, 142
sous_maille_1elt_selectif_mod, 143
sous_maille_axi, 144
sous_maille_dyn, 295
sous_maille_selectif, 141
sous_maille_selectif_mod, 139
sous_maille_smago, 148

- sous_maille_smago_dyn, [146](#)
- sous_maille_smago_filtre, [145](#)
- sous_maille_wale, [147](#)
- sous_zone, [367](#)
- sous_zones, [298](#)
- Spai, [232](#)
- spec_pdc_base, [356](#)
- SSOR, [231](#), [232](#)
- ssor, [300](#)
- ssor_bloc, [301](#)
- stab, [127](#)
- standard, [128](#)
- standard_KEps, [156](#)
- stat_post_deriv, [77](#)
- Statistiques, [76](#), [78](#), [79](#)
- Statistiques_en_serie, [78](#), [79](#)
- supg, [125](#)
- supprime_bord, [59](#)
- symetrie, [253](#), [255](#)
- system, [59](#)

- t_deb, [77](#)
- t_fin, [77](#)
- tayl_green, [268](#)
- Temperature, [76](#), [79](#)
- temperature, [162](#)
- temperature_imposee_pari, [256](#)
- tenseur_Reynolds_extern, [129](#), [366](#)
- terme_puissance_thermique_echange_impose, [366](#)
- test_solveur, [60](#)
- testeur, [60](#)
- testeur_medcoupling, [61](#)
- tetraedriser, [61](#)
- tetraedriser_homogene, [61](#)
- tetraedriser_homogene_compact, [62](#)
- tetraedriser_homogene_fin, [63](#)
- tetraedriser_par_prisme, [63](#)
- thi, [163](#)
- thi_thermo, [164](#)
- trainee, [365](#)
- traitement_particulier_base, [162](#)
- tranche, [299](#)
- transformer, [64](#)
- transport_interfaces_ft_disc, [201](#)
- Transport_K_Eps_Realisable, [168](#)
- transport_k_epsilon, [208](#)
- transport_marqueur_ft, [209](#)
- transversale, [357](#)
- triangler, [64](#)
- triangler_fin, [64](#)
- triangler_h, [65](#)
- turbulence_pari_base, [369](#)
- turbulence_pari_scalaire_base, [373](#)
- type, [76](#), [79](#), [231](#)

- uniform_field, [268](#)
- union, [299](#)
- utau_imp, [372](#)

- valeur_totale_sur_volume, [269](#)
- vdf, [257](#)
- vect_nom, [66](#)
- vef, [257](#)
- vefprep1b, [257](#)
- verifier_qualite_raffinements, [65](#)
- verifier_simplexes, [66](#)
- verifiercoin, [66](#)
- Vitesse, [76](#), [79](#)
- vitesse_imposee, [205](#)
- vitesse_interpolee, [205](#)
- volume, [73](#)

- xyz, [17](#)