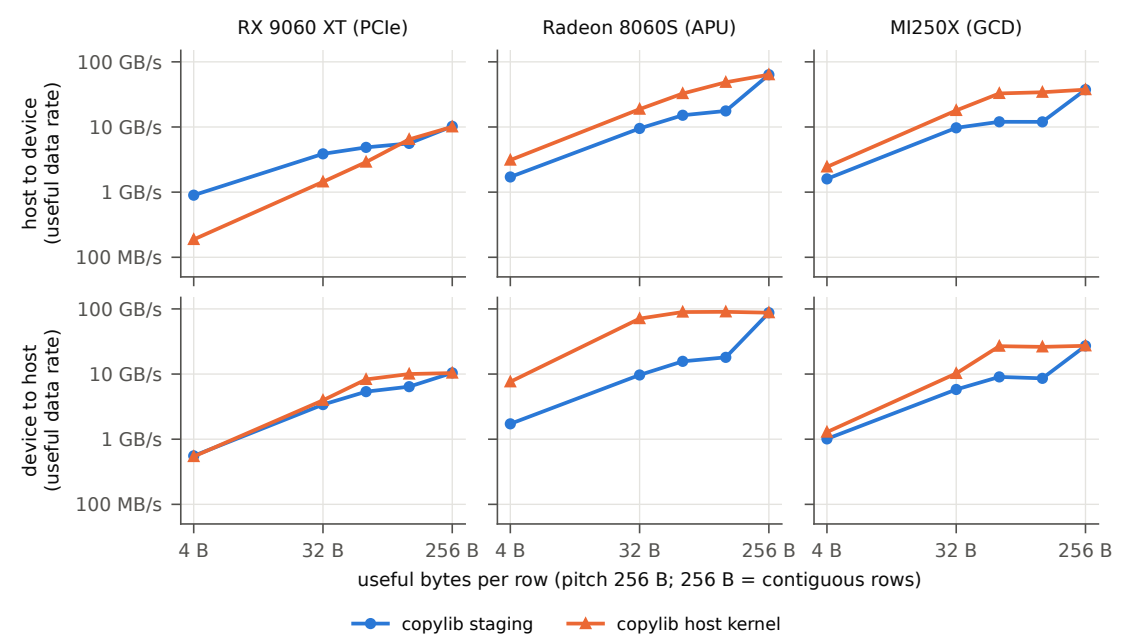
RX 9060 XT (PCIe)
Radeon 8060S (APU)
MI250X (GCD)
host to device
(useful data rate)
device to host
(useful data rate)
100 GB/s
10 GB/s
1 GB/s
100 MB/s
4 B
32 B
256 B
useful bytes per row (pitch 256 B; 256 B = contiguous rows)
copylib staging
copylib host kernel