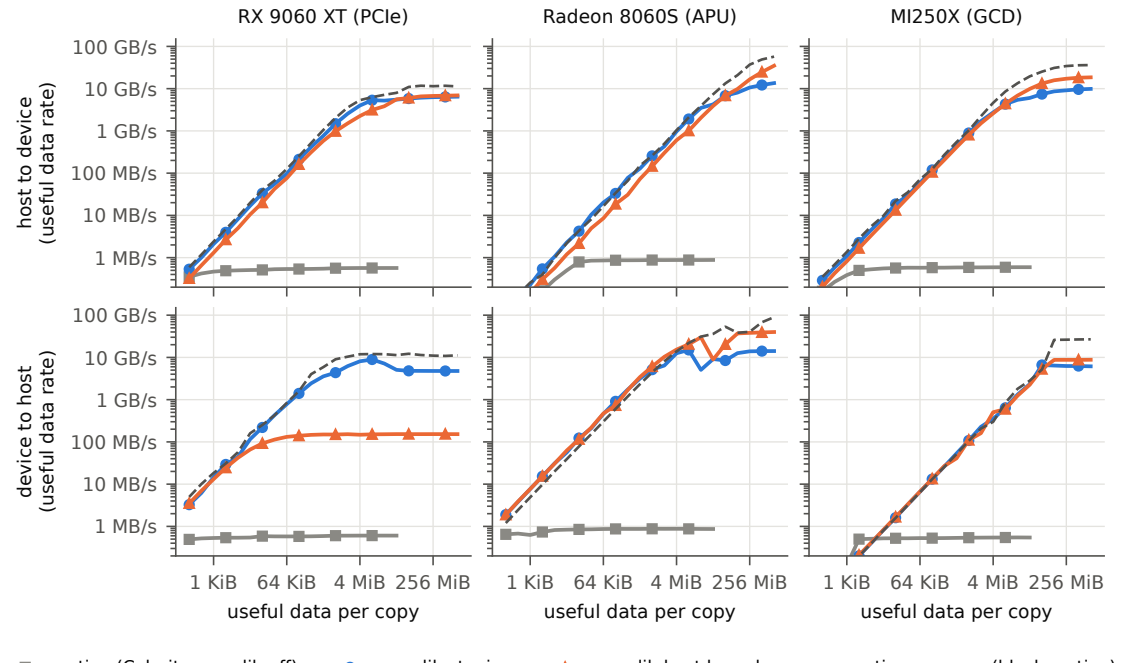
RX 9060 XT (PCIe)
Radeon 8060S (APU)
MI250X (GCD)
host to device
(useful data rate)
device to host
(useful data rate)
100 GB/s
10 GB/s
1 GB/s
100 MB/s
10 MB/s
1 MB/s
1 KiB
64 KiB
4 MiB
256 MiB
useful data per copy
native (Celerity, copylib off)
copylib staging
copylib host kernel
contiguous copy (block, native)