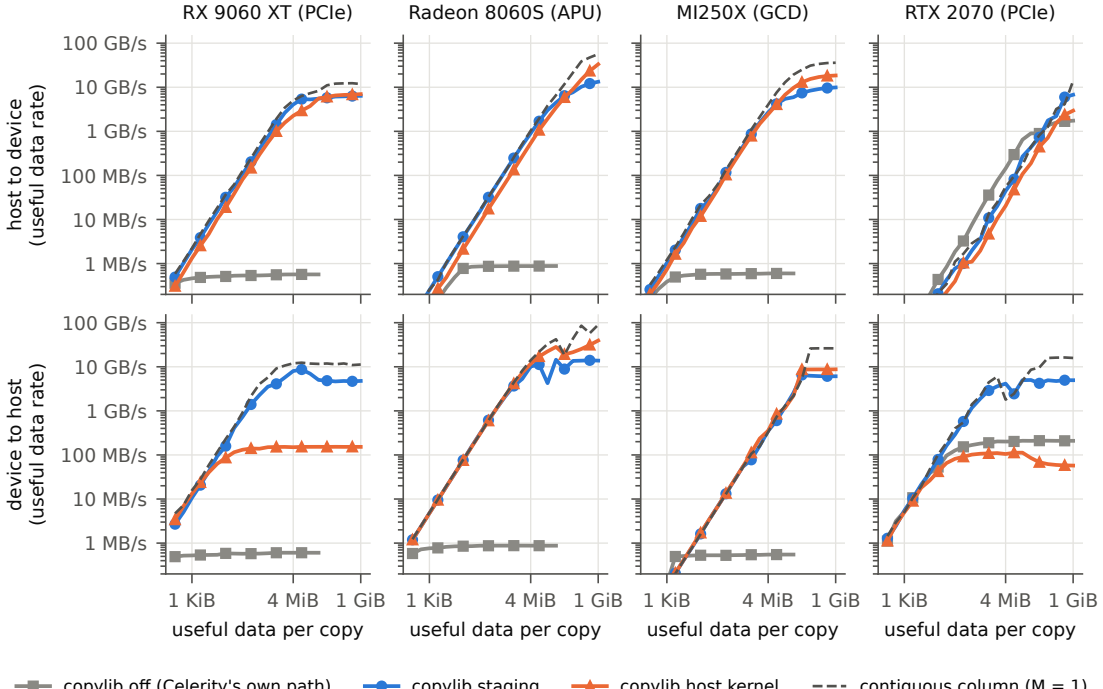
RX 9060 XT (PCIe)
Radeon 8060S (APU)
MI250X (GCD)
RTX 2070 (PCIe)
host to device
(useful data rate)
device to host
(useful data rate)
100 GB/s
10 GB/s
1 GB/s
100 MB/s
10 MB/s
1 MB/s
1 KiB
4 MiB
1 GiB
useful data per copy
copylib off (Celerity's own path)
copylib staging
copylib host kernel
contiguous column (M = 1)