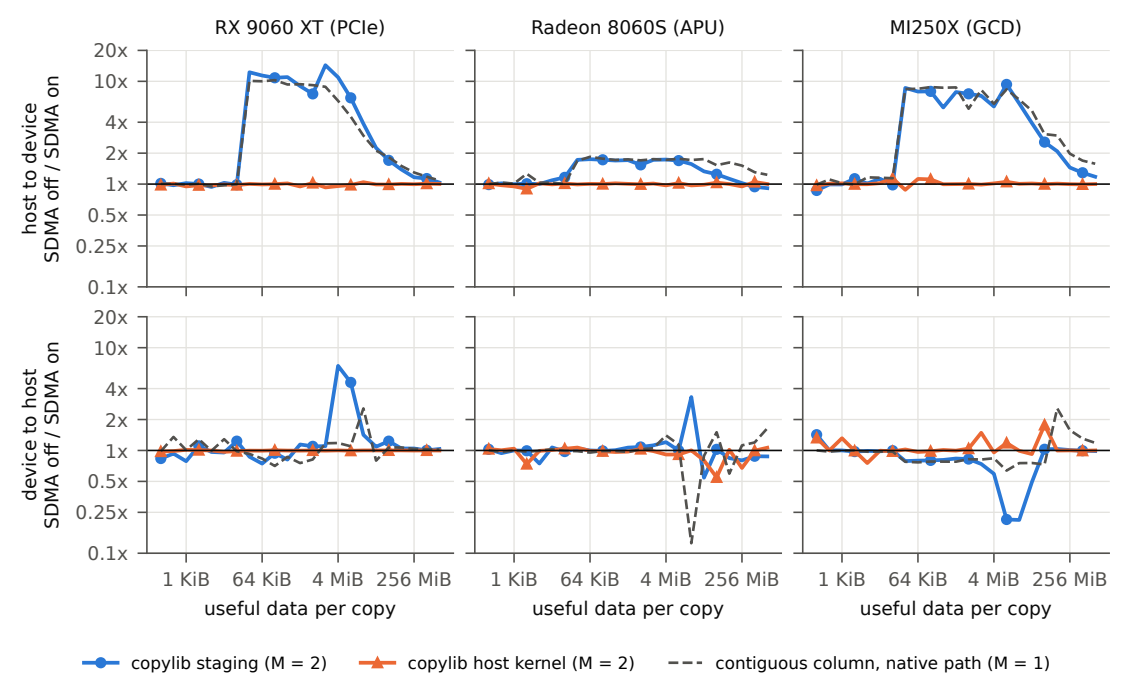
RX 9060 XT (PCIe)
Radeon 8060S (APU)
MI250X (GCD)
host to device
SDMA off / SDMA on
device to host
SDMA off / SDMA on
20x
10x
4x
2x
1x
0.5x
0.25x
0.1x
1 KiB
64 KiB
4 MiB
256 MiB
useful data per copy
copylib staging (M = 2)
copylib host kernel (M = 2)
contiguous column, native path (M = 1)