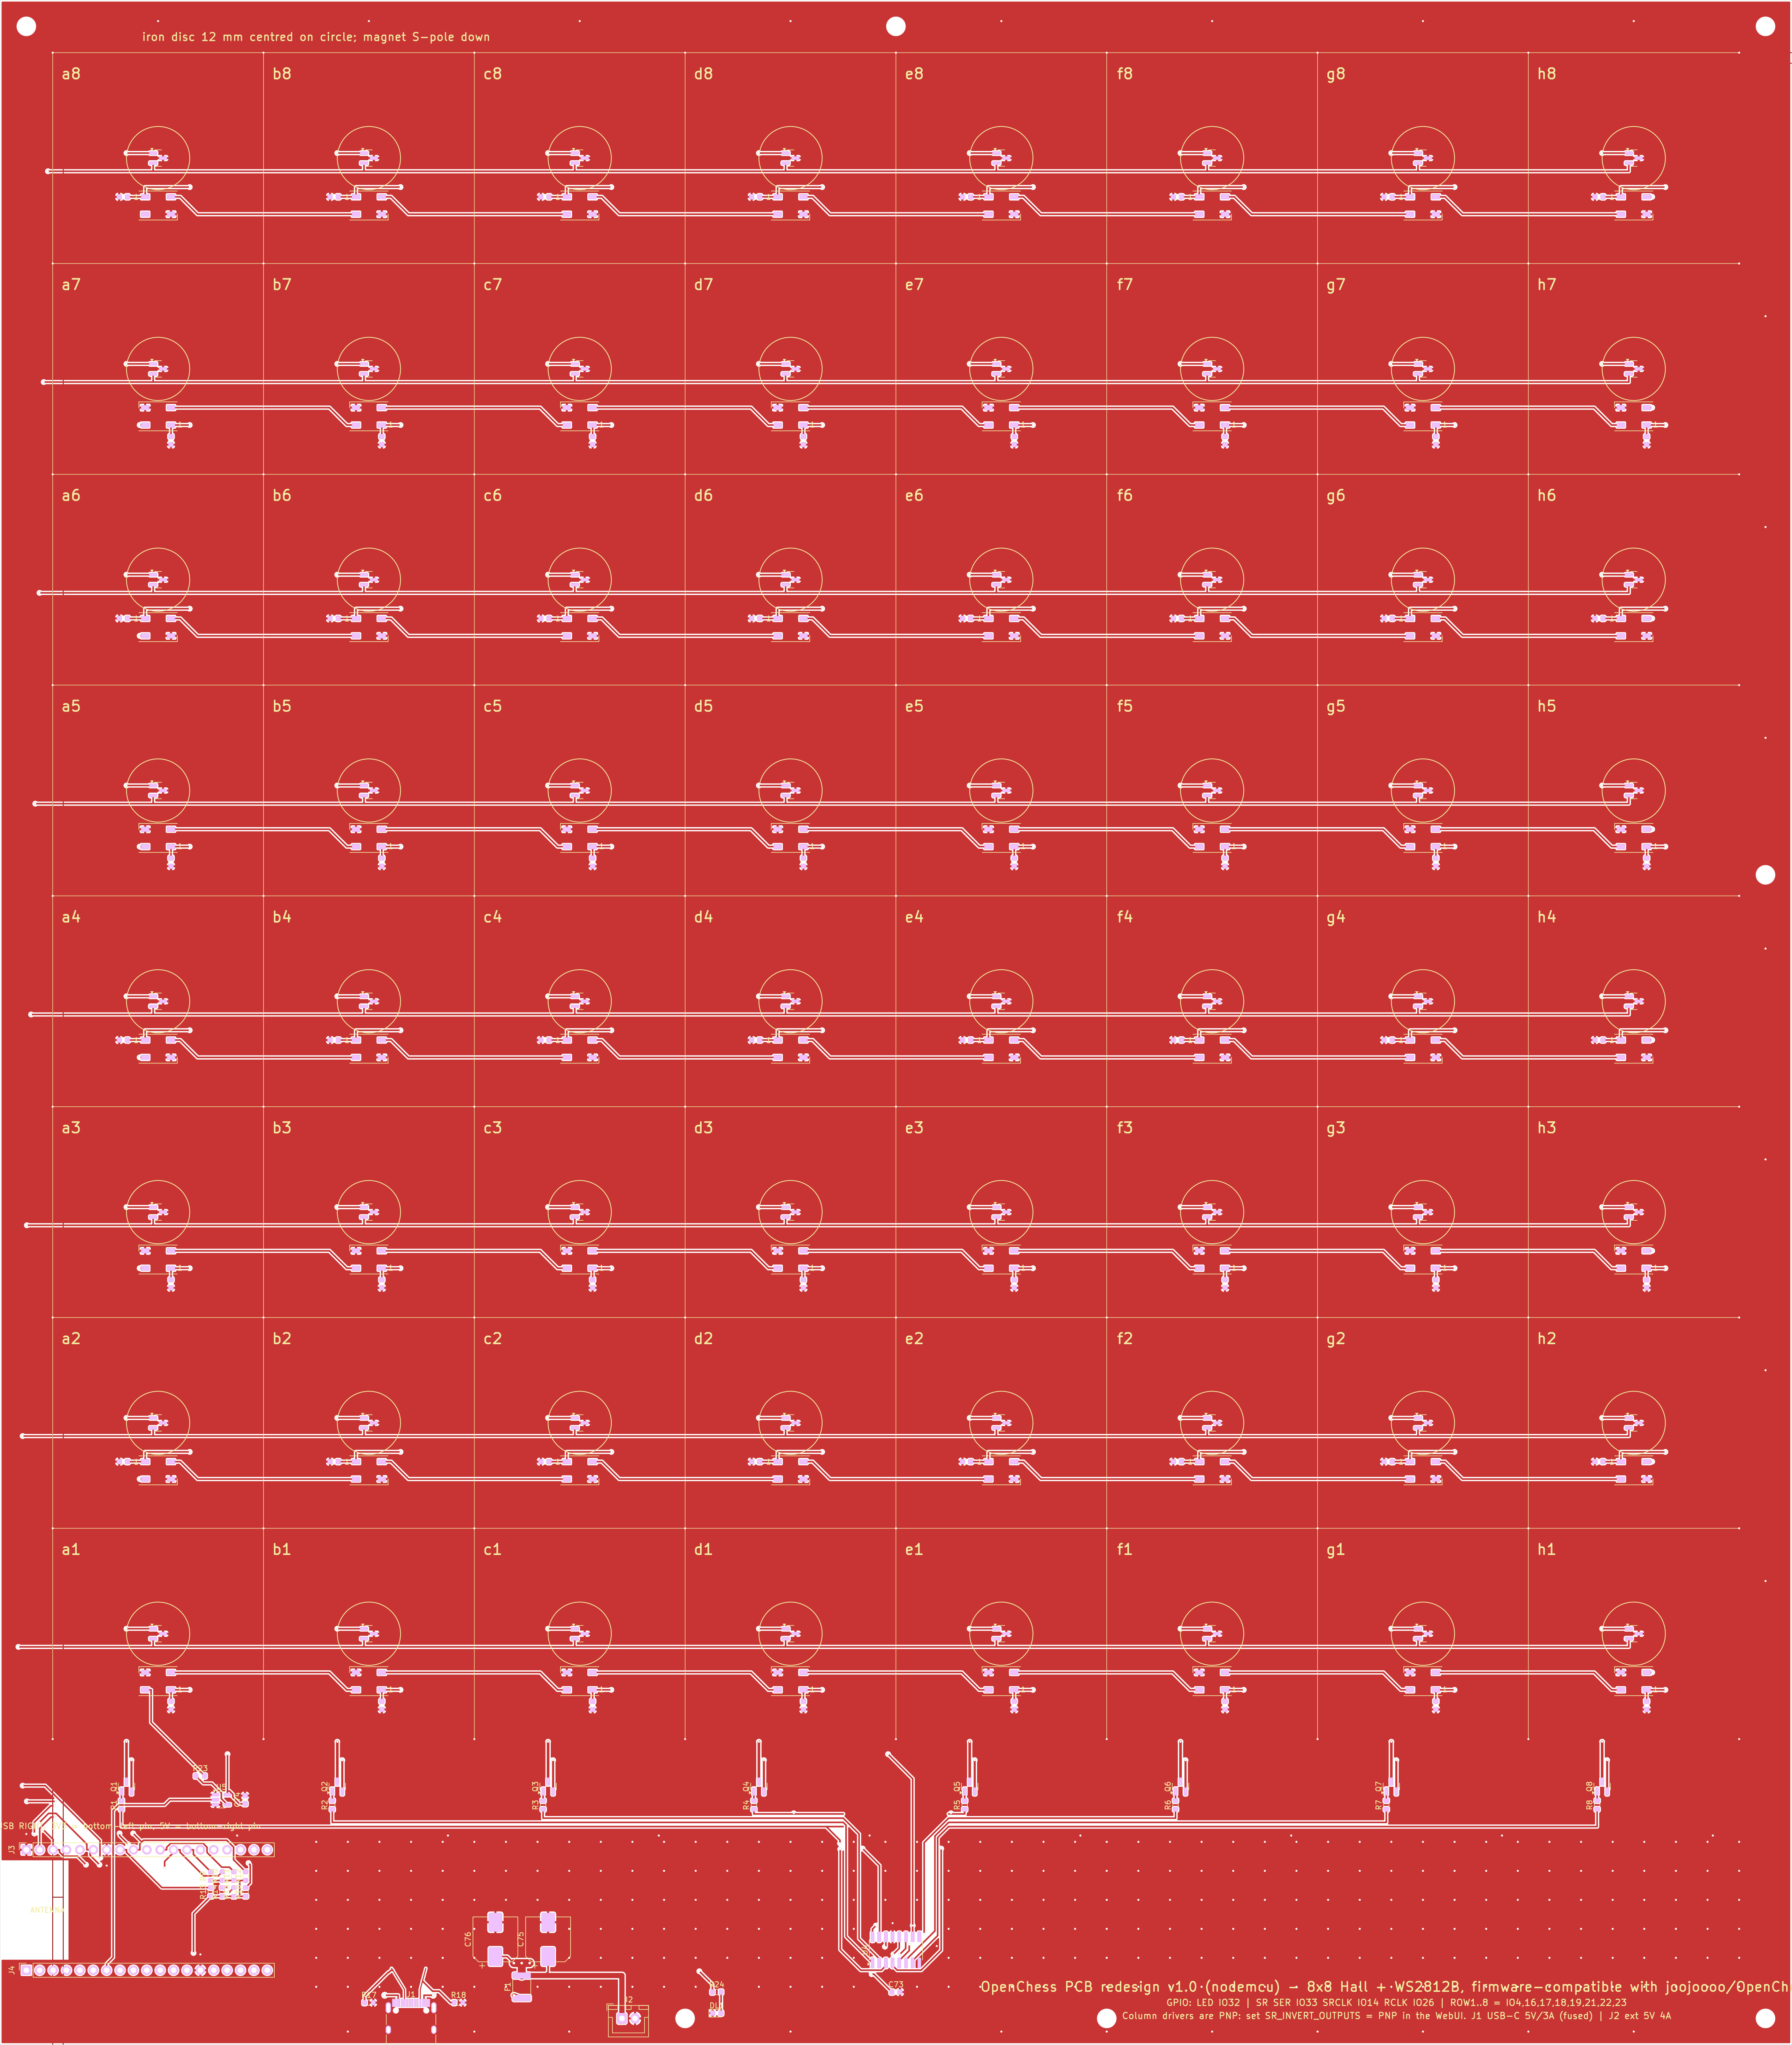

iron disc 12 mm centred on circle; magnet S–pole down

USB RIGHT, 3V3 = bottom–left pin, 5V = bottom–right pin

OpenChess PCB redesign v1.0 (nodemcu) – 8x8 Hall + WS2812B, firmware–compatible with joojoooo/OpenChess

GPIO: LED IO32 | SR SER IO33 SRCLK IO14 RCLK IO26 | ROW1..8 = IO4,16,17,18,19,21,22,23

Column drivers are PNP: set SR_INVERT_OUTPUTS = PNP in the WebUI. J1 USB–C 5V/3A (fused) | J2 ext 5V 4A

Sheet:
File: openchess–board–nodemcu.kicad_pcb

Title:

Size: A2	Date:	**Rev:**
KiCad E.D.A. kicad–cli 7.0.11+dfsg–1build4		Id: 1/1