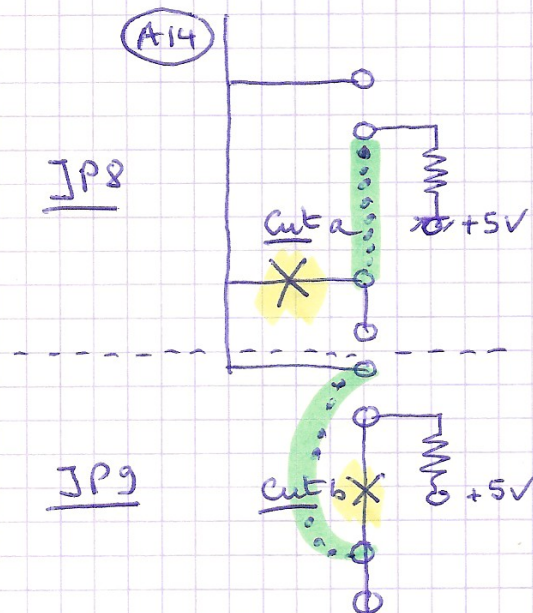HP 9836 A and C   CPU Board 0926-66516
Config Jumpers to adapt 27c 256 Boot rom's

⚠ The original Rom   U 88   1818 - 3115
                      U 57   1818 - 3114

have not the same pin-out as the 27c 256
To replace ROM by UVRom 27c 256 the
Jumpers have to be configured as follow =

JP8

JP9

(A14)

Cut a ✕ +5V

Cut b ✕ +5V

Tracks seen circuit side

① Cut the tracks (a+b)
② Solder Straps 1 and 2 ○○○○
③ Install the 2 x 27c 256 programmed with
   the rom's files.