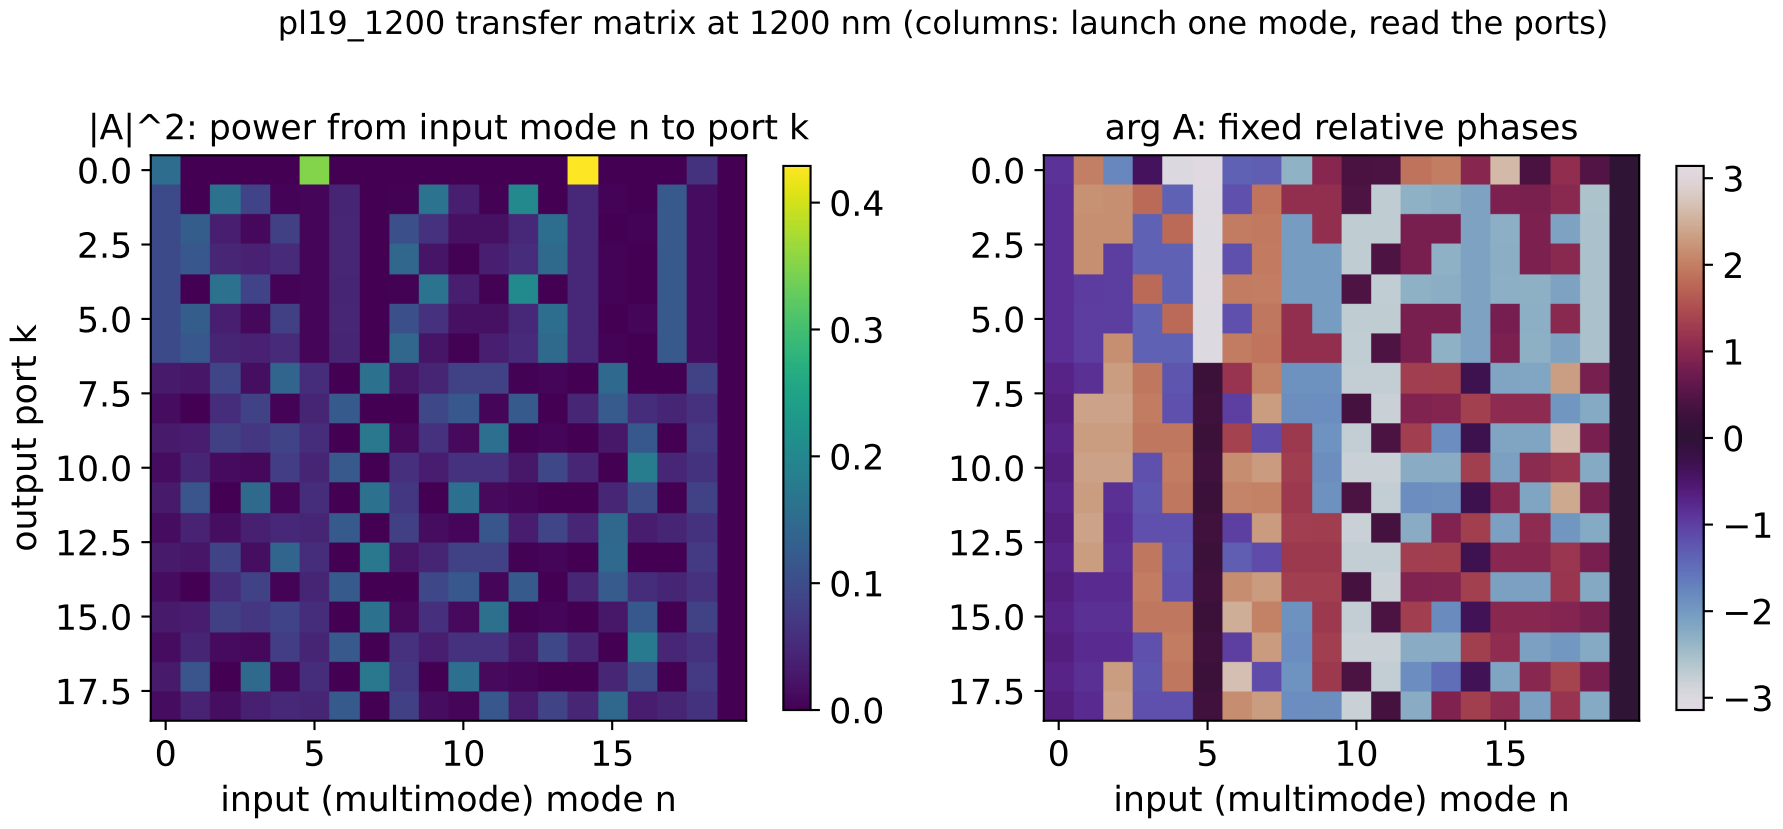
pl19_1200 transfer matrix at 1200 nm (columns: launch one mode, read the ports)
|A|^2: power from input mode n to port k
arg A: fixed relative phases
output port k
input (multimode) mode n
input (multimode) mode n
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
0
5
10
15
0.4
0.3
0.2
0.1
0.0
3
2
1
0
−1
−2
−3