


BX63


Fully-Automated Microscope

The BX63 motorized microscope offers outstanding stability and imaging precision for research applications with a convenient touch-screen interface for ease of use. The system also features a detachable controller that can be positioned to suit your preference or workflow requirements.

Observation Images

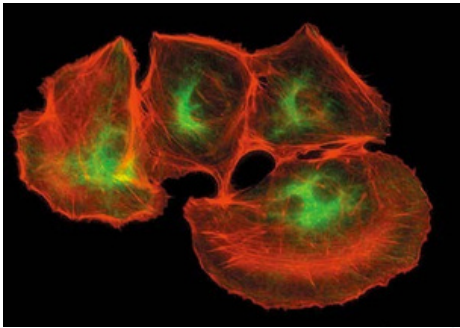


NRK-52E Cells (Alexa Fluor 488/Alexa Fluor 546)

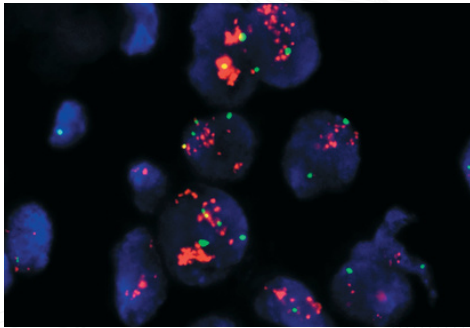

Mammary Gland Tissue (Fluorescence)

Specifications

Illumination	Built-in Kohler illumination for transmitted light, LED light intensity indicator, motorized field stop	
	• High color rendering index LED light source • 12 V 100 W halogen bulb (pre-centered)	
Focusing	Built-in motorized nosepiece focus Stroke: 20 mm, minimum increment: 0.01 μ m, maximum speed: 5 mm/s	
Observation tube	Widefield (FN 22)	• Widefield tilting trinocular • Widefield trinocular
		• Widefield erect image trinocular • Widefield tilting binocular • Widefield tilting, telescoping, lifting binocular • Widefield ergo binocular • Widefield binocular
Nosepiece	• Motorized septuple revolving nosepiece • Interchangeable reversed coded septuple nosepiece	
Stage	• Ultrasonic stage (stroke: X: 76 mm $\times$ Y: 52 mm, maximum speed: 30 mm/s) • Ceramic-coated coaxial stage with left or right hand drive control: with rotating mechanism and torque adjustment mechanism, optional rubber grips available • Cross stage with short left handle	
	• Motorized universal condenser (NA 0.9, motorized 8-position turret, aperture stop, polarizing filter in/out mechanism and top lens swing out mechanism), for 1.25X – 100X [swing-out 1.25X – 4X, with oil top lens: (NA 1.4)] • Swing out Achromatic (NA 0.9), for 1.25X – 100X (swing-out: 1.25X – 4X) • Achromatic Aplanatic (NA 1.4), for 10X – 100X • Universal (NA 0.9), for 1.25X – 100X [swing-out: 1.25X – 4X, with oil top lens: (NA 1.4)] • Ultra low (NA 0.16), for 1.25X – 4X • Darkfield dry (NA 0.8 – 0.92), for 10X – 100X • Darkfield oil (NA 1.20 – 1.40), for 10X – 100X	
Other features	Motorized 9-position ND filter wheel, high-performance control box U-RTCE	
Dimensions (W $\times$ D $\times$ H)	294.5 mm $\times$ 740.5 mm $\times$ 582.5 mm (Epifluorescence configuration)	
Weight	35 kg (Epifluorescence configuration)	

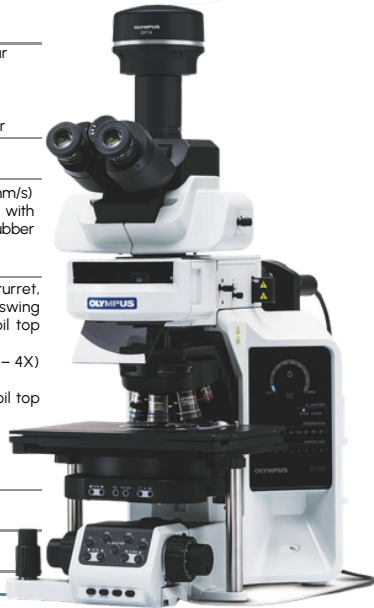

EVIDENT
OLYMPUS

LABEX
FLUOCCA
IMARIS

GREINER
BIOSCIENCE

APPLIED
SPECTRAL
IMAGING

SAKURA
FINETEK

ZTEC
CRAFTK

TEKSQRAY
FEATHER

DYNAMICA
FROILABO

FASTER
ARCTIKO
KUHNERT
HETTICH

HBK
CAMECA
IX CAMERAS

THERMO EM
CRYSTAL