

EVIDENT  
OLYMPUS

LABEX  
FLUOCCA  
IMARIS

GREINER  
SPECTRAL  
BIOSCIENCE

APPLIED  
SPECTRAL  
IMAGING

SAKURA  
FINETEK

ZTEC  
CRAFTTEK

TEKSQRAY  
FEATHER

DYNAMICA  
FROLABO

FASTER  
ARCHIKO  
KÜHNERT  
HEITICH

HBK  
CAMECA  
IX CAMERAS

THERMO  
EM  
CRYSTAL

# FV5000




## Confocal Laser Scanning Microscope

The FLUOVIEW FV5000 is a platform built for every dimension of discovery. From crisp, photon-level quantitation at the surface to deep, multiphoton imaging in thick, living samples, the FV5000 captures biology at every scale. SiVIR detectors deliver exceptional sensitivity, a wide dynamic range, and photon-level precision, while 2K resonant and 8K galvo scanners freeze motion in real time for exceptional clarity. Smart automation simplifies setup and workflow and ensures consistent, reproducible results. Combining advanced detection, intelligent design, and intuitive operation, the FV5000 makes powerful imaging more accessible than ever, helping researchers capture more detail, more reliably, in less time.

### Specifications

|                            |                                                     |                                                               |
|----------------------------|-----------------------------------------------------|---------------------------------------------------------------|
| Scanner                    | Galvanometer scanner                                | 64 × 64 – 8192 × 8192 pixels, 0.2 μs/pixel – 1000 μs/pixel    |
|                            | Resonant scanner                                    | 512 × 512 pixels, 1024 × 1024 pixels, 2048 × 2048 pixels      |
|                            | Field number                                        | 20 (for both scanner types)                                   |
| Spectral confocal detector | Detector                                            | SiVIR detector (cooled SiPM, broadband type/red-shifted type) |
|                            | Maximum channels                                    | Six channels                                                  |
|                            | Spectral method                                     | VPH, detectable wavelength range: 400 nm-900 nm               |
| Laser                      | VIS laser                                           | 405 nm, 445 nm, 488 nm, 514 nm, 561 nm, 594 nm, 640 nm        |
|                            | NIR laser                                           | 685 nm, 730 nm, 785 nm                                        |
|                            | Laser power monitor                                 | Built in                                                      |
| Image                      | High dynamic range photon counting (1G cps, 16-bit) |                                                               |

### Observation Images

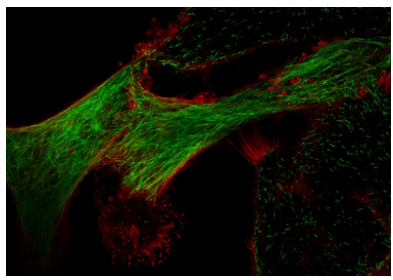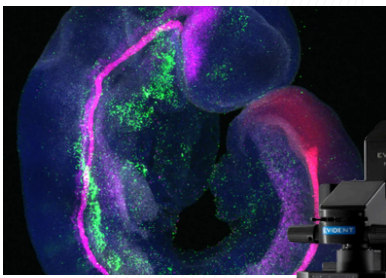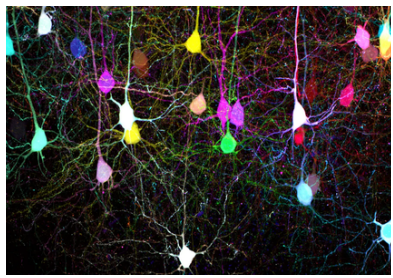

Learn More

