

EVIDENT
OLYMPUS

LABEX
FLUOCCA
IMARIS

GREINER
BIOSCIENCE

APPLIED
SPECTRAL
IMAGING

SAKURA
FINETEK

ZTEC
CRAFTTEK

TEKSQRAY
FEATHER

DYNAMICA
FROLLABO

FASTER
ARCHIKO
KUNHERR
IX CAMERAS

HBK
CAMERA


THERMO
EM
CRYSTAL

BX53


Semi-Motorized Fluorescence Microscope

The BX53 semi-motorized fluorescence microscope can be configured to meet virtually any research need. It supports a wide range of fluorescence imaging applications and offers advanced features for enhanced operating ease and process flexibility.

Observation Images

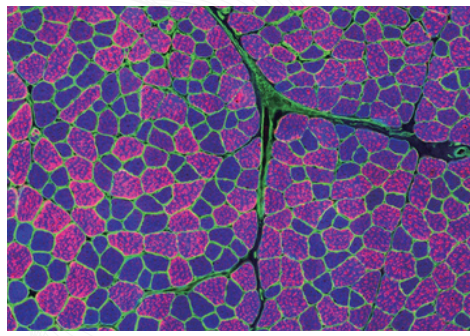

Muscle Tissue (Fluorescence)

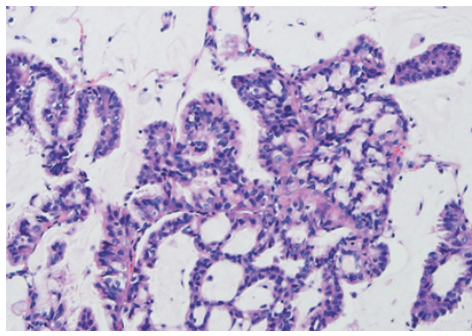

Lung Tissue with EML4-ALK fusion gene
(Haematoxylin and Eosin Stain)

Specifications

Illumination	Built-in Kohler illumination for transmitted light, Light preset switch, LED light intensity indicator, Built-in filters (LBD-IF, ND6, ND25, optional) high color rendering index LED	
Focusing	Vertical stage movement: 25 mm stage stroke with coarse adjustment limit stopper, Torque adjustment for coarse adjustment knobs, Stage mounting position variable, High sensitivity fine focusing knob (minimum adjustment gradations: 1 µm)	
Observation tube	Widefield (FN 22)	• Widefield tilting trinocular • Widefield erect image trinocular • Widefield tilting binocular • Widefield tilting, telescoping, lifting binocular • Widefield ergo binocular • Widefield binocular
	Super Widefield (FN 26.5)	• Super widefield trinocular • Super widefield erect image tilting trinocular
Nosepiece	Interchangeable reversed quintuple/coded quintuple, sextuple/coded sextuple, septuple/coded septuple nosepiece	
Stage	Ceramic-coated coaxial stage with left or right hand drive control: with rotating mechanism and torque adjustment mechanism, optional rubber grips available (non-stick grooved coaxial, plain, rotatable stages are also available)	
Condenser	• Abbe (NA 1.1), for 4X – 100X • Swing out Achromatic (NA 0.9), for 1.25X – 100X (swing-out: 1.25X – 4X) • Achromatic Aplanatic (NA 1.4), for 10X – 100X • Phase contrast, darkfield (NA 1.1), [phase contrast: for 10X – 100X, darkfield: for 10X – 100X (up to NA 0.80)] • Universal (NA 0.9), for 1.25X – 100X [swing-out: 1.25X – 4X, with oil top lens: (NA 1.4)] • Low (NA 0.75), for 2X – 100X (Dry) • Ultra low (NA 0.16), for 1.25X – 4X • Darkfield dry (NA 0.8 – 0.92), for 10X – 100X • Darkfield oil (NA 1.20 – 1.40), for 10X – 100	
Dimensions (W × D × H)	274.5 mm × 614 mm × 469 mm (Epifluorescence configuration)	
Weight	21 kg (Epifluorescence configuration)	

