




ASSEMBLY INSTRUCTIONS

1. Insert the holder into the body of the wise from below. You can rotate the holder to your preference.
2. Tighten all four printed screws. Use a hex 4mm.
3. Insert the guide rods into the bracket jaws and screw them into the body of the clamp.
4. Insert the threaded rod into the clamp and screw it through the jaws of the bracket until it reaches the other side.
5. Tighten the screw until the guide rod can be secured in place.
6. Screw this part from the bottom into the wise's holder.
7. Snap the cup into place.
8. Push the jaws into the wise.
9. Jaws are changable

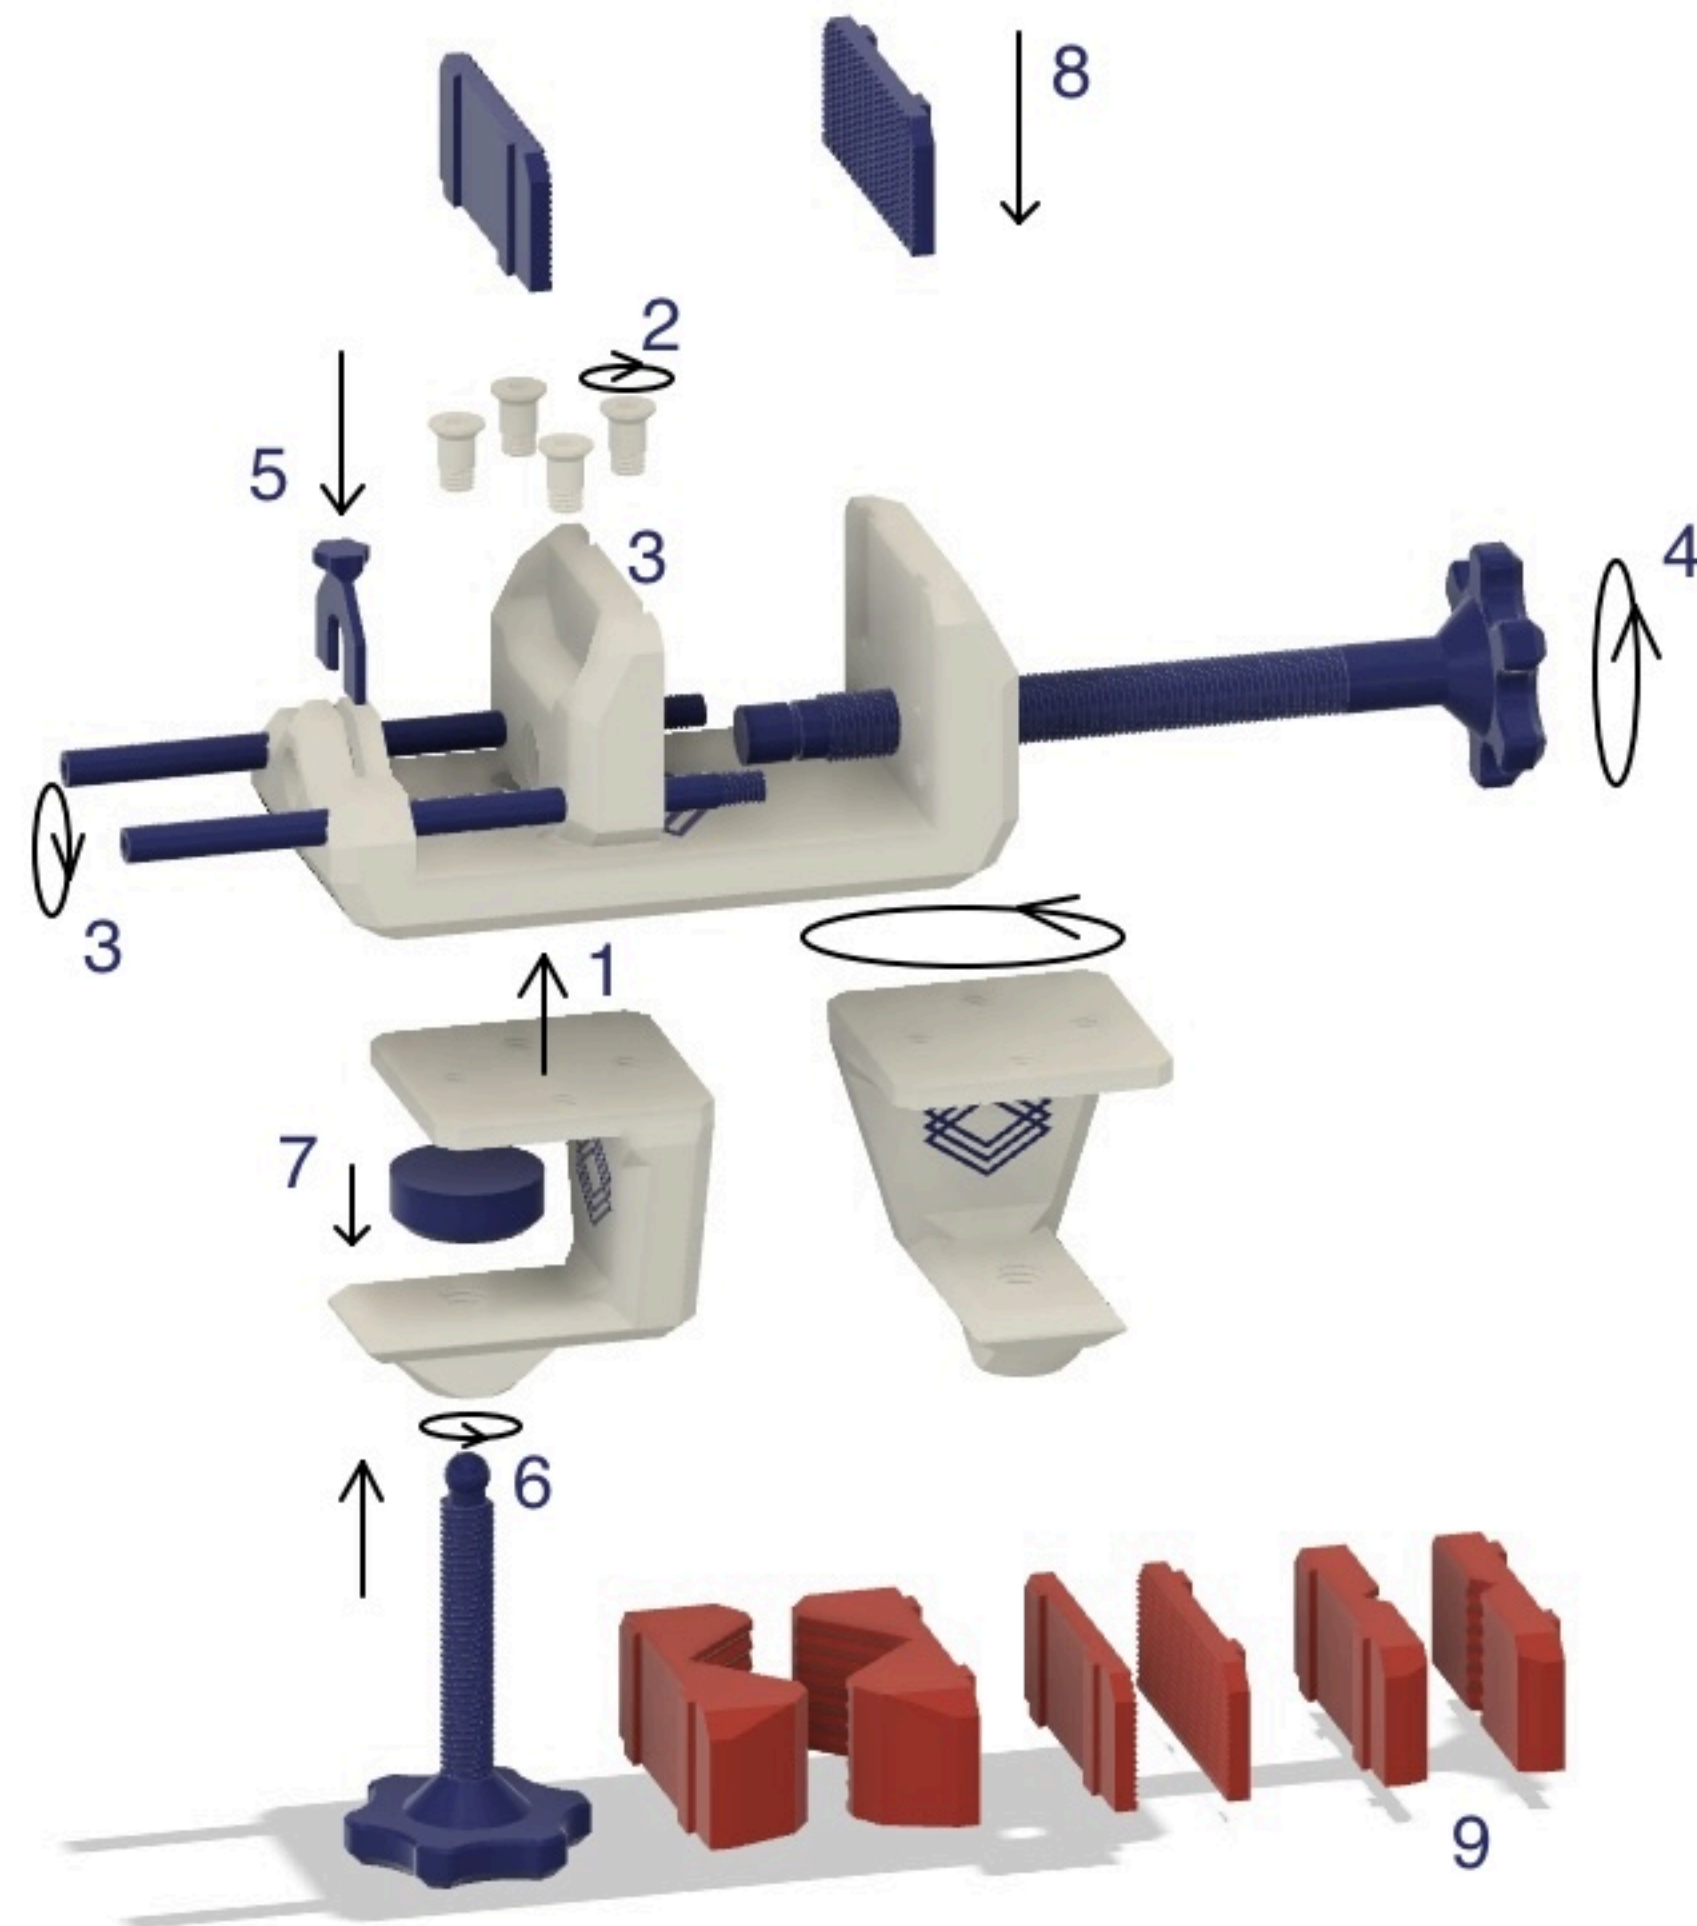