


GATT Communication Path — Watch (Peripheral / Server) <-> Phone (Central / Client)

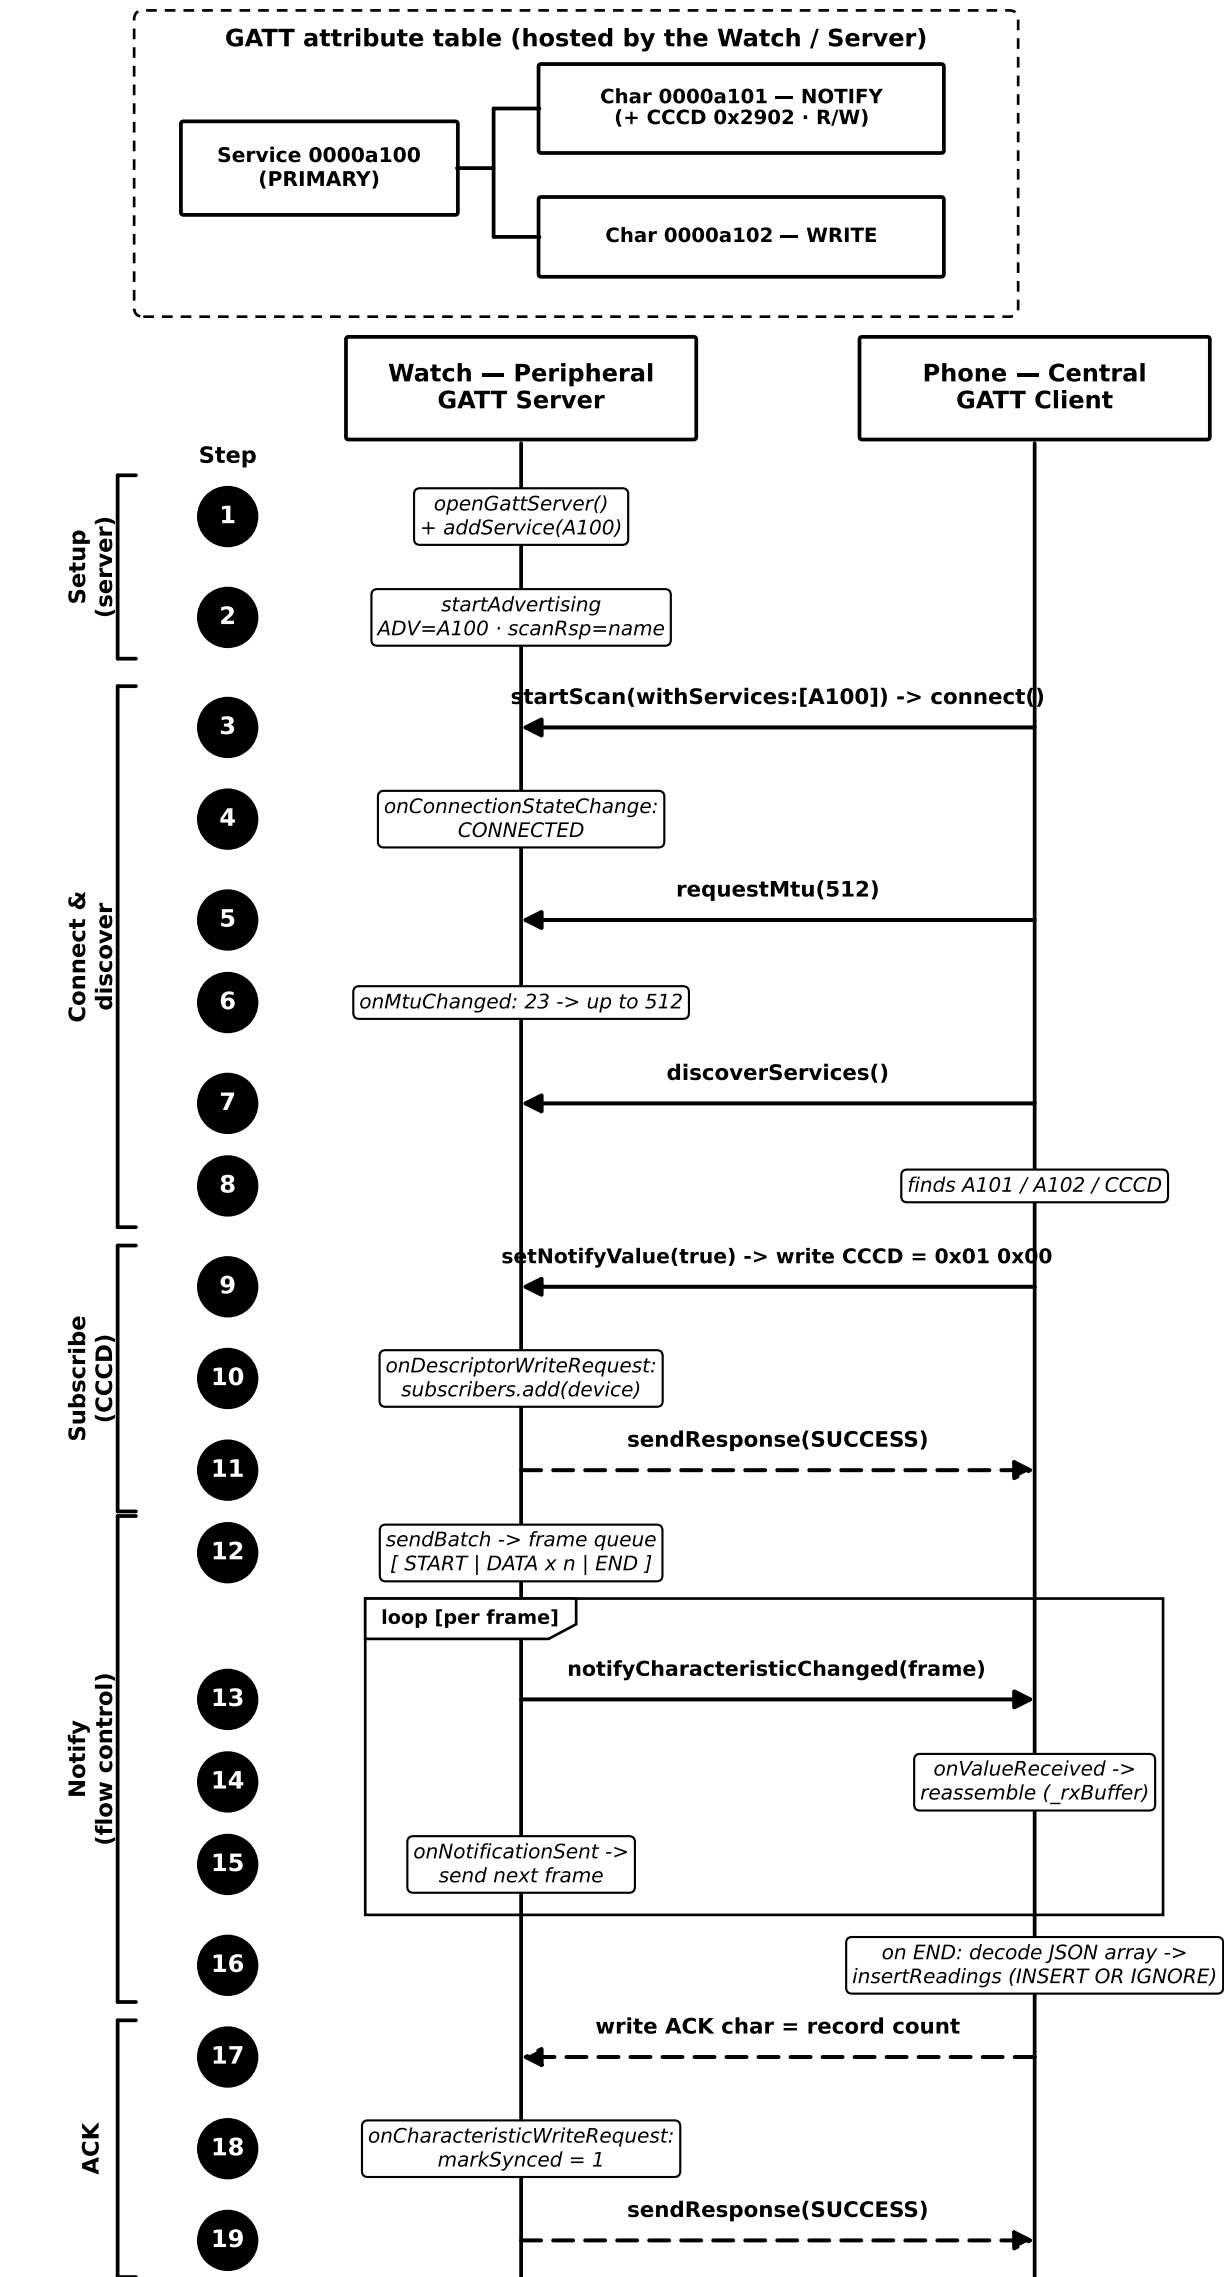

128-bit UUIDs (16-bit aliases A100/A101/A102 on the Bluetooth base UUID). One notification = one frame (opcode 1 B + chunk <= MTU-4).

→ flow (solid) - - → ACK / response (dashed)