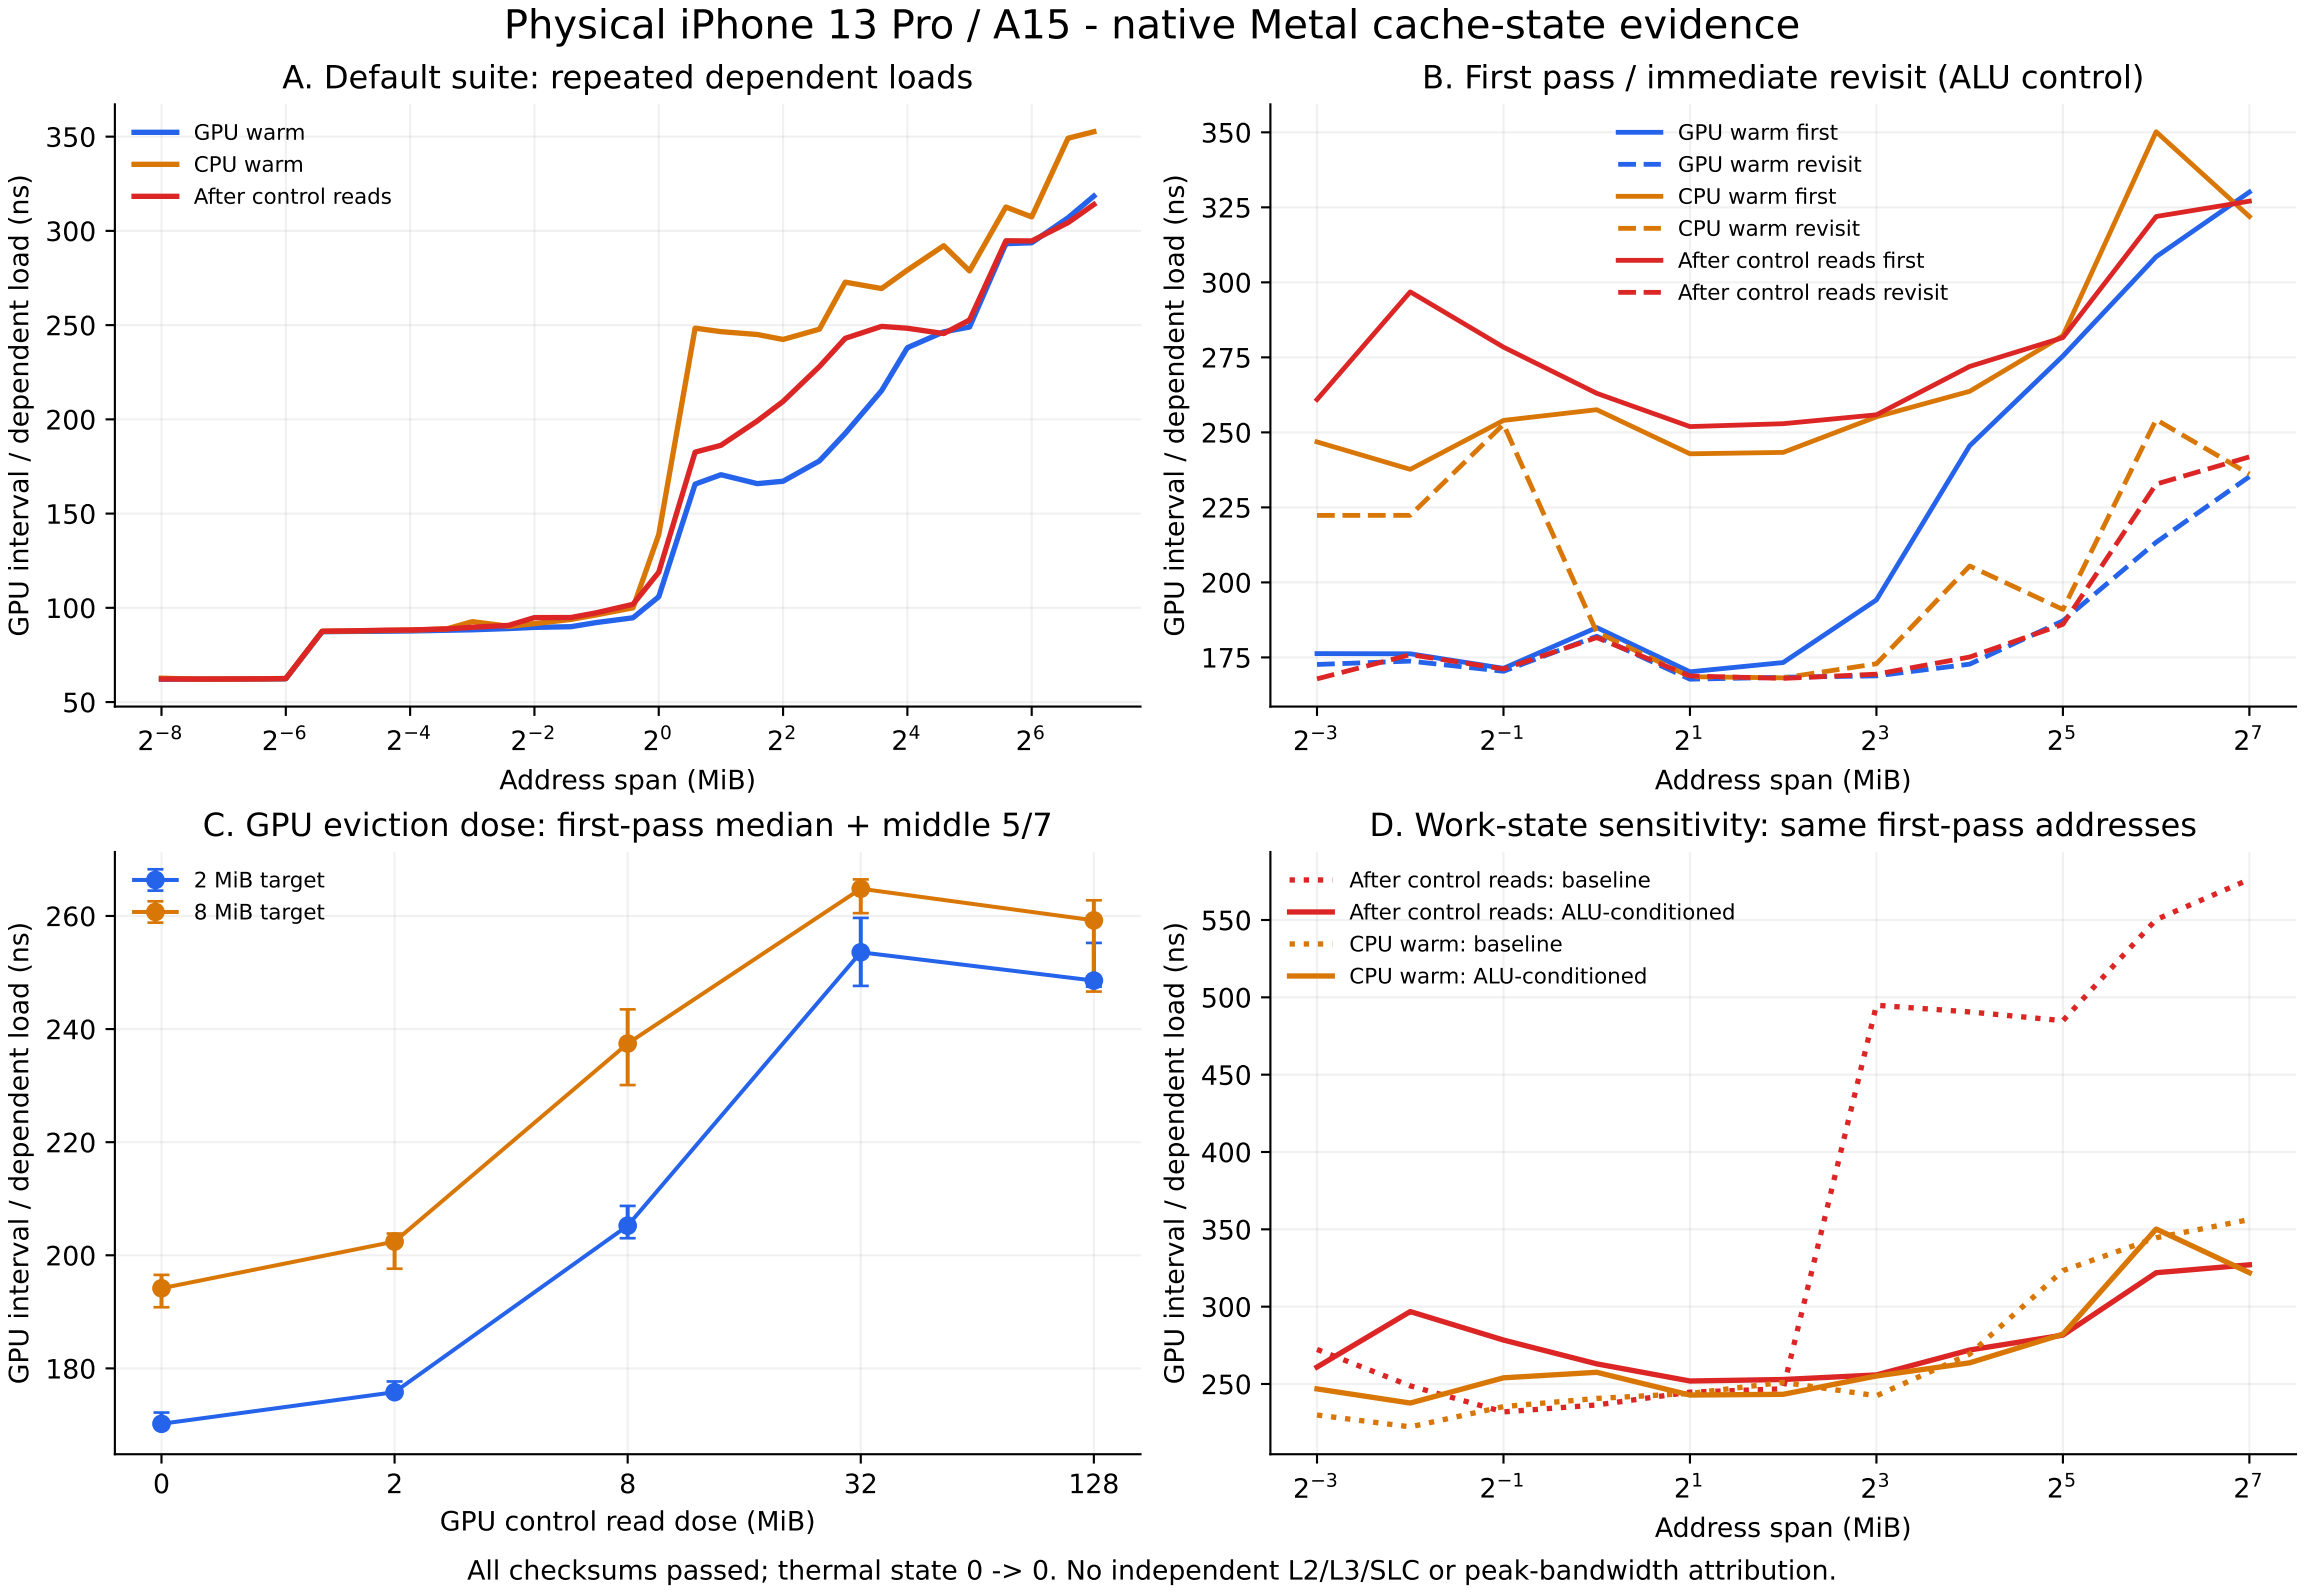
Physical iPhone 13 Pro / A15 - native Metal cache-state evidence
A. Default suite: repeated dependent loads
GPU warm
CPU warm
After control reads
GPU interval / dependent load (ns)
Address span (MiB)
B. First pass / immediate revisit (ALU control)
GPU warm first
GPU warm revisit
CPU warm first
CPU warm revisit
After control reads first
After control reads revisit
GPU interval / dependent load (ns)
Address span (MiB)
C. GPU eviction dose: first-pass median + middle 5/7
2 MiB target
8 MiB target
GPU interval / dependent load (ns)
GPU control read dose (MiB)
D. Work-state sensitivity: same first-pass addresses
After control reads: baseline
After control reads: ALU-conditioned
CPU warm: baseline
CPU warm: ALU-conditioned
GPU interval / dependent load (ns)
Address span (MiB)
All checksums passed; thermal state 0 -> 0. No independent L2/L3/SLC or peak-bandwidth attribution.