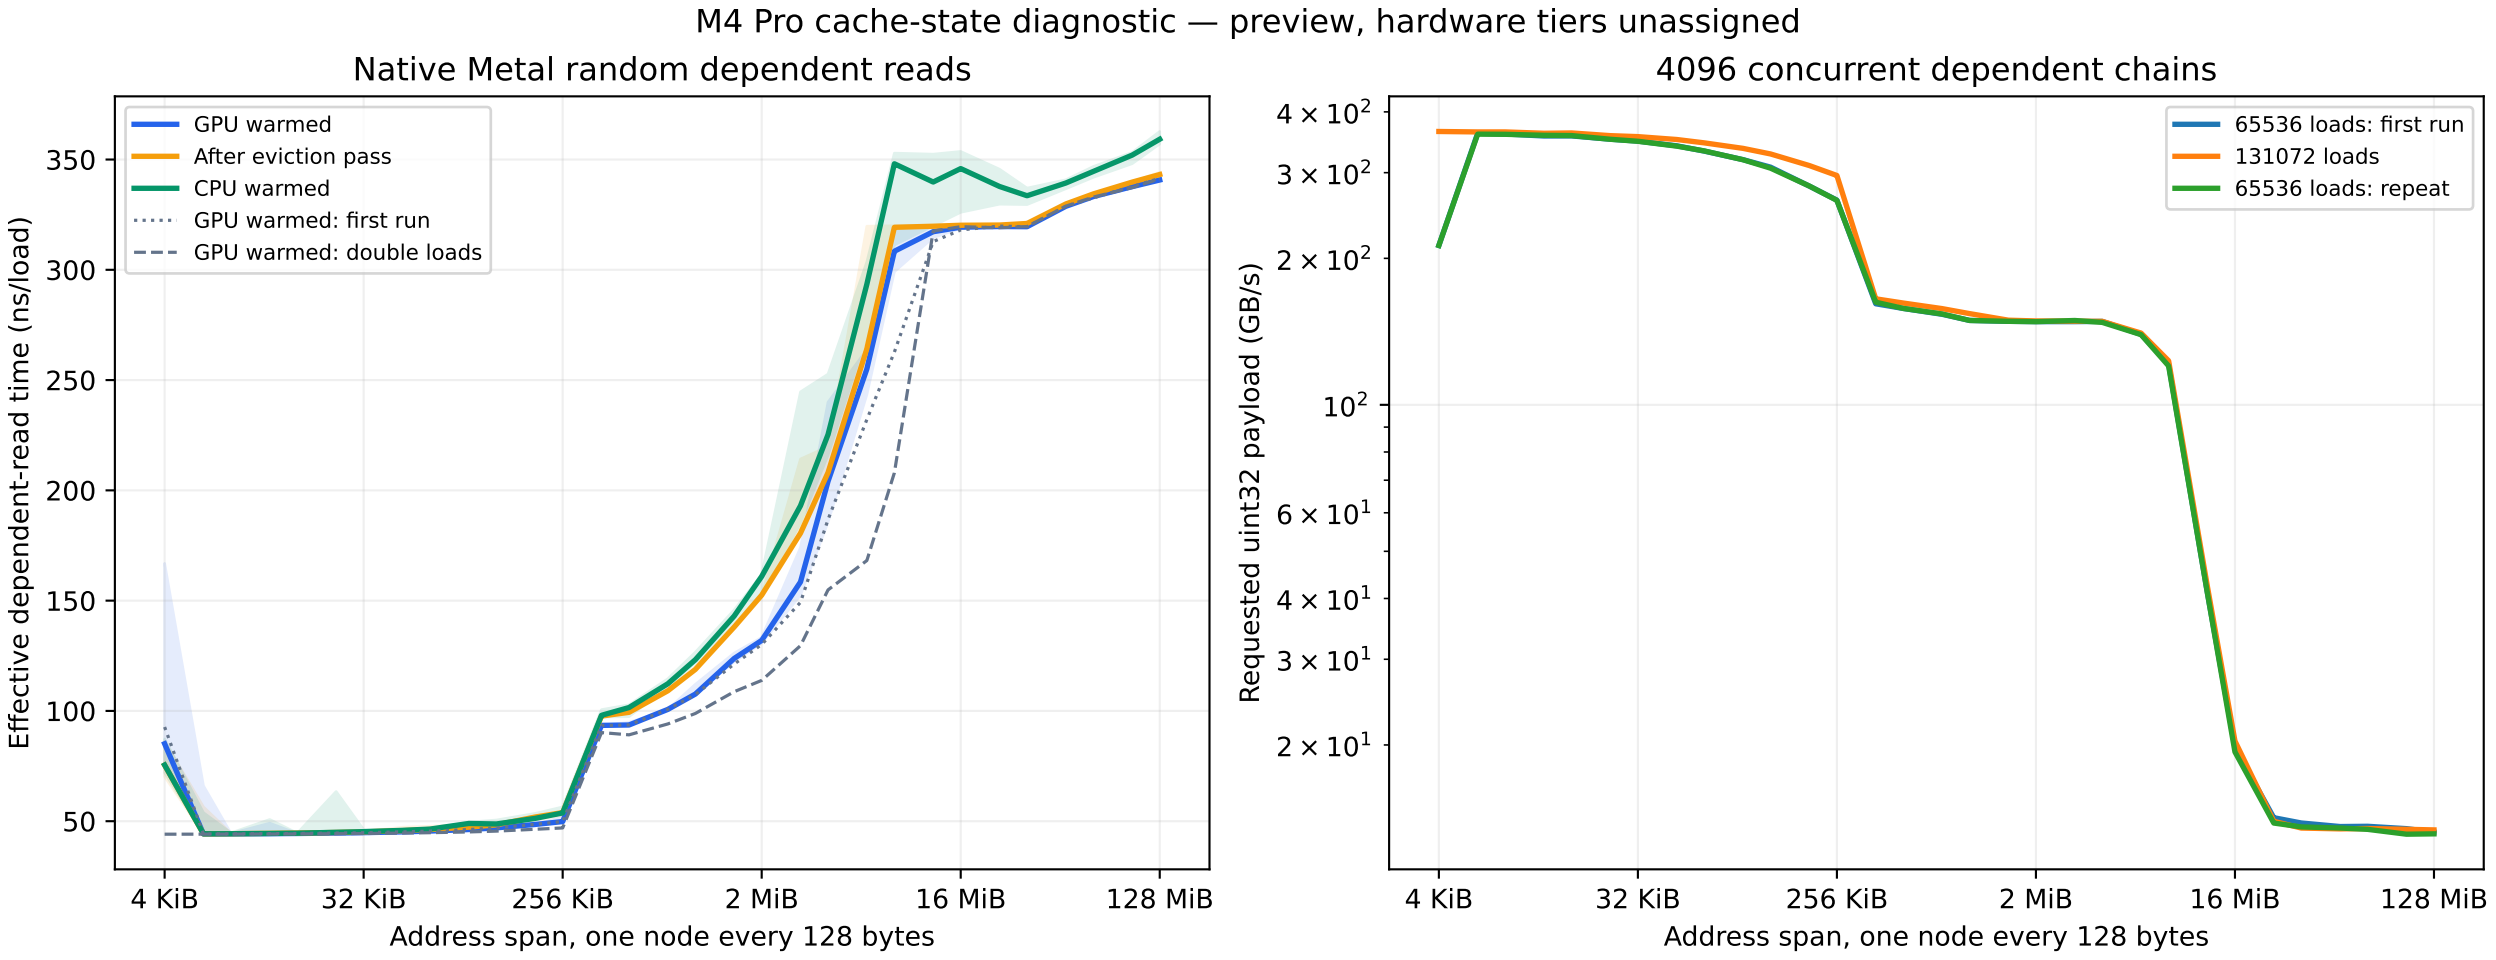
M4 Pro cache-state diagnostic — preview, hardware tiers unassigned
Native Metal random dependent reads
GPU warmed
After eviction pass
CPU warmed
GPU warmed: first run
GPU warmed: double loads
Effective dependent-read time (ns/load)
350
300
250
200
150
100
50
4 KiB
32 KiB
256 KiB
2 MiB
16 MiB
128 MiB
Address span, one node every 128 bytes
4096 concurrent dependent chains
65536 loads: first run
131072 loads
65536 loads: repeat
Requested uint32 payload (GB/s)
4 × 10^2
3 × 10^2
2 × 10^2
10^2
6 × 10^1
4 × 10^1
3 × 10^1
2 × 10^1
4 KiB
32 KiB
256 KiB
2 MiB
16 MiB
128 MiB
Address span, one node every 128 bytes