
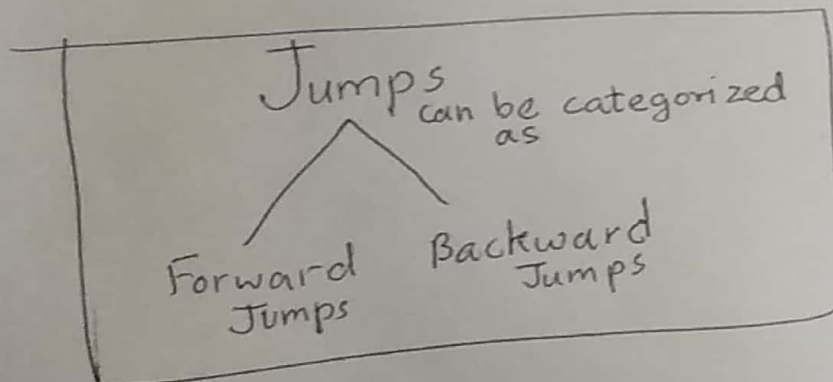


CONTROL TRANSFER INSTRUCTIONS


The control transfer is handled in Assembly Language (2086/88) with the help of 'JMP' command

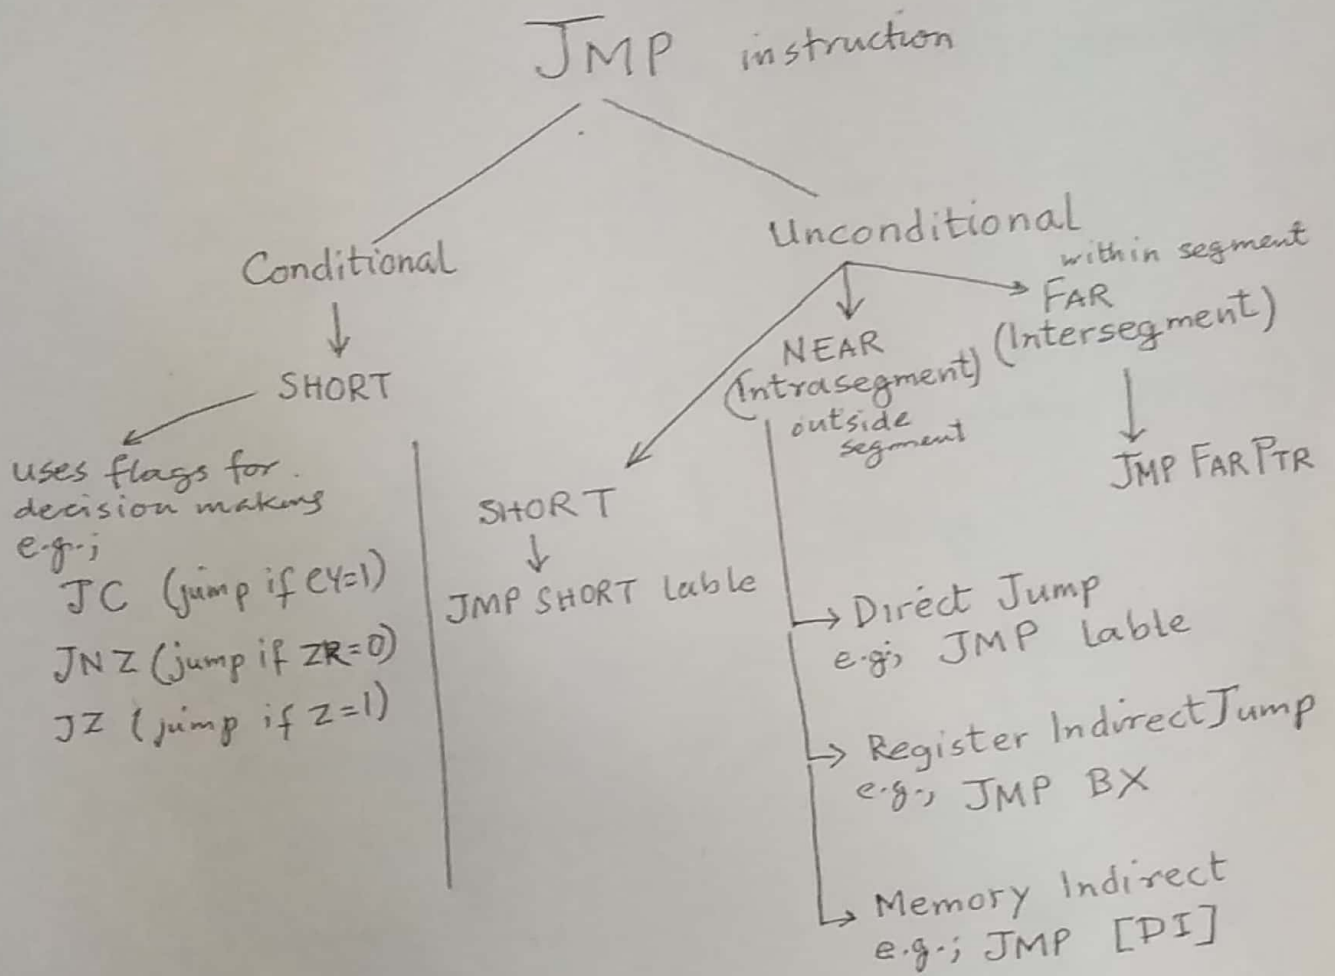

Short Jumps

Range: 1 Byte ~ 256 locations ⇒

-128 ↔ -1 ; 0 ↔ +127
Backward Forward

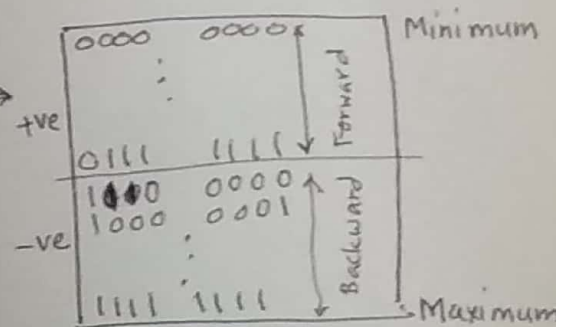


Loop

Concept: loop is used when something is to be done repeatedly.

OR


To do/perform a same task repeatedly.

Requirement: 'Counter' is required to keep track of repetition.

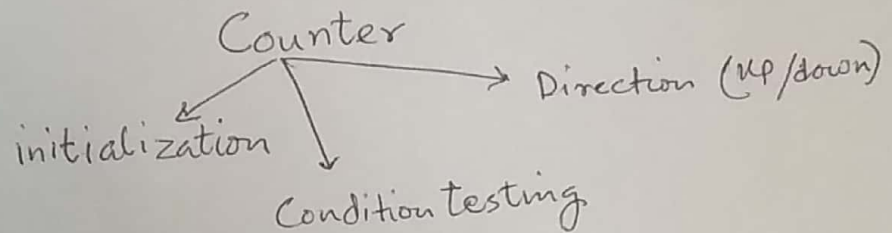

- initialization must be done outside a loop
- condition testing and direction (increment/decrement) is done within the loop body

in C-language we use for loop ~~as~~ to add '1' in a variable 'x' 10 times as

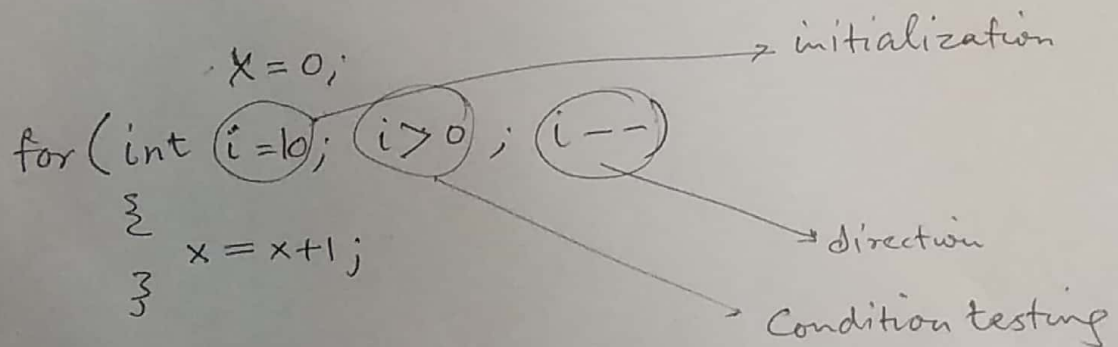

In Assembly;

MOV CX, 10	; ← (i=10) initialize counter register CX
MOV AL, 0	; ← (X=0)
AGAIN: Add AL, 1	; ← (X=X+1)
Dec CX	; ← (i--)
JNZ AGAIN	; ← condition testing